

NEMA 12-13 ENCLOSURES

5500 ESDD


OIL & DUST TIGHT DOUBLE DOOR ENCLOSURE

The **5500 ESDD** wall mounted double door, oil and dust tight enclosures are used indoors for protection against dirt, dust and oil.

CSA Certified / UL Listed / NEMA / EEMAC 12-13 / IP55

Technical specifications:

- Made of high quality steel, with continuously welded corner seams.
- Opening has a flat lip around all sides to increase rigidity and prevent dripping water from entering the enclosure when the cover is opened.
- There is no center post.
- Left hand door is flanged and the 3-point locking handle is on the right hand door.
- Seamless gasket ensures a complete and durable dust tight seal.
- The enclosure has die cast hinges, with stainless steel captive pins.
- Internal mounting holes are provided.
- Enclosures comes complete with a galvanized inner panel.
- Enclosures are finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Paint color : ANSI/ASA 61 gray.

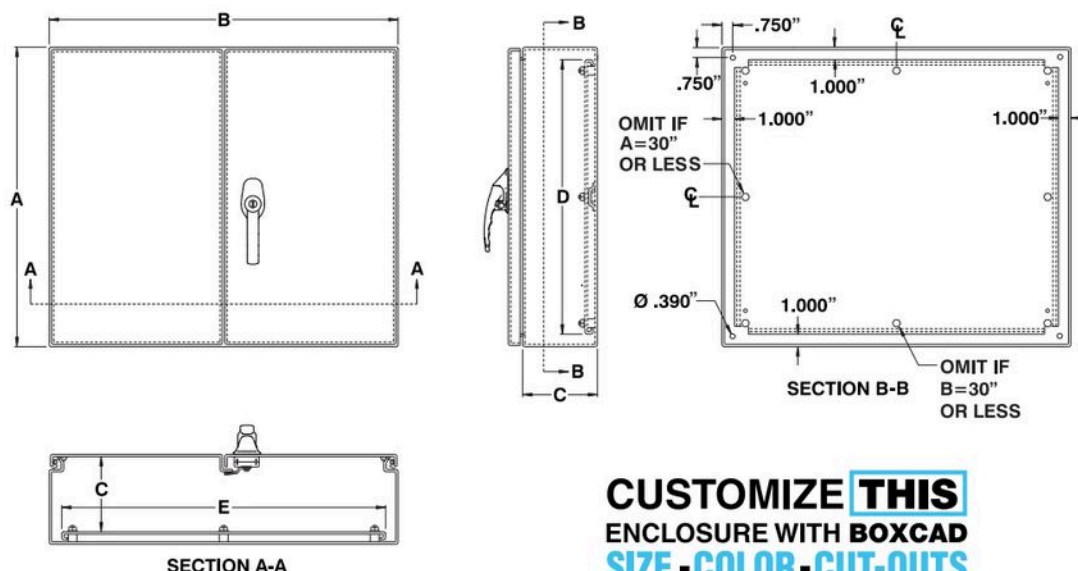

CUSTOMIZE THIS
ENCLOSURE WITH **BOXCAD**
SIZE - COLOR - CUT-OUTS



CATALOG NUMBER	DIMENSIONS					SHIP WGHT LBS.
	A	B	C	D	E	
5500 ESDD244208	24	42	8	22	40	117
5500 ESDD244808	24	48	8	22	46	130
5500 ESDD544208	54	42	8	52	40	272
5500 ESDD244210	24	42	10	22	40	150
5500 ESDD304210	30	42	10	28	40	152
5500 ESDD304810	30	48	10	28	46	168
5500 ESDD306010	30	60	10	28	58	203
5500 ESDD364212	36	42	12	34	40	220
5500 ESDD364812	36	48	12	34	46	242
5500 ESDD366012	36	60	12	34	58	292
5500 ESDD424212	42	42	12	40	40	197
5500 ESDD424812	42	48	12	40	46	216
5500 ESDD426012	42	60	12	40	58	349
5500 ESDD484812	48	48	12	46	46	225



Insulated box?

To have your enclosure insulated, add suffix "TH"

i.e.: 5500 ESDD426012TH → Insulated steel enclosure