

SAFETY DISCONNECT ENCLOSURES

The **5500 ESY** right flangemounted safety disconnect enclosures are used indoors for protection against dirt, dust and water splashing.

CSA Certified / UL Listed / NEMA / EEMAC 12-13 / IP55

Technical specifications:

- Made of high quality steel, with continuously welded corner seams.
- Curled lip around three sides to increase rigidity and pre-

vent dripping water from entering the enclosure when the door is open.

- Concealed hinges can be pulled out to remove the door.
- Enclosures higher than 42" are equipped with a 3 point locking mechanism while smaller enclosures come with a 2 point locking mechanism.
- Door stiffeners are also provided on larger models.
- Internal mounting holes are

provided.

- Enclosure comes complete with a 12 GA galvanized inner panel, which is double bent for maximum rigidity and mounts on M8 welded studs.
- Finished with heat fused powder paint, electrostatically applied on a pretreated base.
- Box is ANSI/ASA 61 smooth gray.
- Inner panel is galvanized (other colors available).

If the 5500 ESY is to be used with a flange mounted disconnect switch or a circuit breaker, the following items must be ordered:

Ordering an Allen-Bradley 1494V Disconnect switch

- an operating mechanism with the disconnect switch 1494V
- an operating handle 1494V-H1
- a connecting rod 1494V-RA1 if the enclosure is 8" deep or 94VRA2 if the enclosure is 12" deep
- if required, a trailer fuse block kit 1494V, a fuse clip and line and load connectors.

Circuit breaker

- a Westinghouse or General Electric circuit breaker.
- an operating mechanism 1494V
- an operating handle 1494V-H11
- a connecting rod 1494V-RA1 if the enclosure is 8" deep or 4VRA2 if the enclosure is 12" deep

Ordering a Cutler Hammer

Disconnect switch catalog C361

- an operating mechanism with the disconnect switch
- an operating handle (C361-H2 or H4)

Circuit breaker operators catalog C371

- a Cutler hammer or Westinghouse circuit breaker
- an operating mechanism
- an operating handle

Ordering a Square D Class 9422 Disconnect switch

- an operating mechanism with the disconnect switch class 9422
- an operating mechanism handle class 9422 Type A-1

Circuit breaker

- a Square D circuit breaker
- an operating mechanism class 9422
- an operating mechanism handle class 9422 Type A-1

Ordering a General Electric Disconnect switch

- a disconnect switch QMR or QMW
- a fuse clip kit if required
- a TDAI flange handle
- an operating mechanism, variable depth

Circuit breakers

- a circuit breaker
- a TDAI flange handle
- an operating handle 1494V-H11
- an operating mechanism, vari-

able depth

Ordering an Asea Brown Boveri Disconnect switch

- a switch flange operated fuse if required
- a DSFHS-12 shaft
- a DSFHN-HS12 handle

Circuit breaker

- a circuit breaker
- an operating mechanism
- a FHS-12 shaft
- a FHN-HS12 handle

Ordering an I-T-E Max-Flex™ Disconnect switch

- a basic right hand switch
- a fuse kit if required
- a handle FHOHS flange mounted
- an operator FHOSO6R
- a cable FHOECO36

Circuit breaker

- a circuit breaker
 - a set of pressure wire connectors
 - a handle FHOH flange mounted
 - an operating mechanism
 - a standard cable 36"
- #### Ordering a Westinghouse Disconnect switch
- a disconnect switch or circuit breaker type DS
 - a yoke assembly and backplate
 - a rod and brace assembly
 - a pivot mechanism
 - an operating handle

Disconnect switches and operating mechanisms are not furnished with the enclosures.



p.600



p.592



p.644



p.642







p.624



p.616



p.646

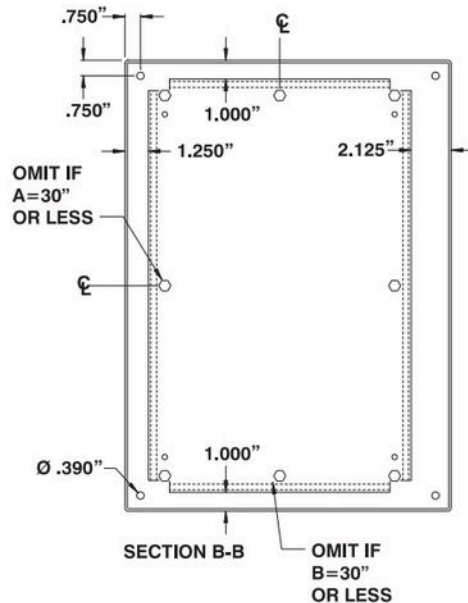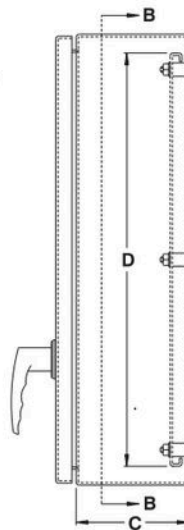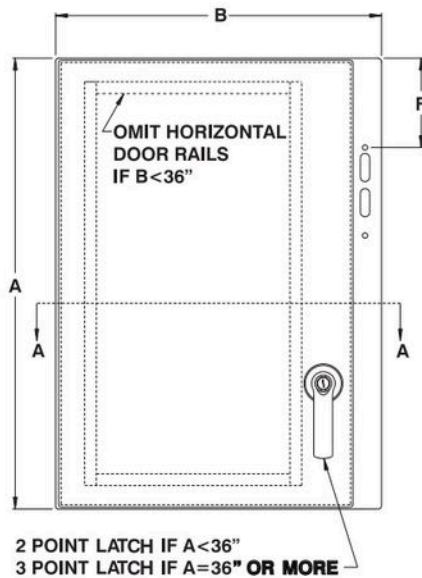

SECTION A-A

† Panels with a height or width of 20" are not double bent.

* This enclosure will only accept the Allen-Bradley DS 200 and the DS 400 disconnect class.

CUSTOMIZE THIS
ENCLOSURE WITH **BOXCAD**
SIZE - COLOR - CUT-OUTS

CATALOG NUMBER	DIMENSIONS						SHIP WTGT LBS.
	A	B	C	D	E	F	
† 5500 ESY202108	20	21.375	8	18	18	7.094	51
5500 ESY242108	24	21.375	8	22	18	8.625	61
5500 ESY242508	24	25.375	8	22	22	8.625	67
5500 ESY302108	30	21.375	8	28	18	8.625	74
5500 ESY302508	30	25.375	8	28	22	8.625	85
5500 ESY362508	36	25.375	8	34	22	8.625	100
5500 ESY363108	36	31.375	8	34	28	8.625	121
5500 ESY423108	42	31.375	8	40	28	8.625	137
5500 ESY423708	42	37.375	8	40	34	8.625	154
5500 ESY483708	48	37.375	8	46	34	8.625	172
5500 ESY603708	60	37.375	8	58	34	8.625	245
† 5500 ESY202110	20	21.375	10	18	18	8.625	55
5500 ESY242110	24	21.375	10	22	18	8.625	68
5500 ESY242510	24	25.375	10	22	22	8.625	75
5500 ESY302110	30	21.375	10	28	18	8.625	78
5500 ESY302510	30	25.375	10	28	22	8.625	90
5500 ESY362510	36	25.375	10	34	22	8.625	110
5500 ESY363110	36	31.375	10	34	28	8.625	126
5500 ESY423110	42	31.375	10	40	28	8.625	143
5500 ESY423710	42	37.375	10	40	34	8.625	193
5500 ESY483710	48	37.375	10	46	34	8.625	211
5500 ESY603710	60	37.375	10	58	34	8.625	250
5500 ESY302512	30	25.375	12	28	22	11.625	100
5500 ESY363112	36	31.375	12	34	28	11.625	130
5500 ESY423112	42	31.375	12	40	28	11.625	150
5500 ESY423712	42	37.375	12	40	34	11.625	200
5500 ESY483712	48	37.375	12	46	34	11.625	220
5500 ESY603712	60	37.375	12	58	34	11.625	257
5500 ESY363116	36	31.375	16	34	28	11.625	150
5500 ESY483716	48	37.375	16	46	34	11.625	232
5500 ESY603716	60	37.375	16	58	34	11.625	265
* 5500 ESYB603712	60	37.375	12	58	34	18.375	257

Insulated box?

To have your enclosure insulated, add suffix "TH"

i.e.: 5500 ESY603716TH ← Insulated steel enclosure



461