
QUICK RELEASE SUBMERSIBLE POLYESTER ENCLOSURES

The **5600 ESPLQW** is a hinged window cover secured by quick release latches suited for use indoors or outdoors where corrosion is a problem, to protect the enclosed equipment from water coming from any direction, dust, dirt and oil.

CSA Certified / UL Listed / NEMA / EEMAC 6P / IP68

Technical specifications:


- Made of UV resistant polyester / polycarbonate.
- The gasket ensures a complete NEMA 6P seal.
- A stainless steel padlock kit is included.
- Incorporated mounting feet.
- Quick pull down hasp.
- Optional galvanized inner panel.
- Quick release latches can be removed and replaced by cover screw inserts.
- Reliable from –40 °C to +80 °C, making it suitable for use in freezers, rooftops, and everything in between.

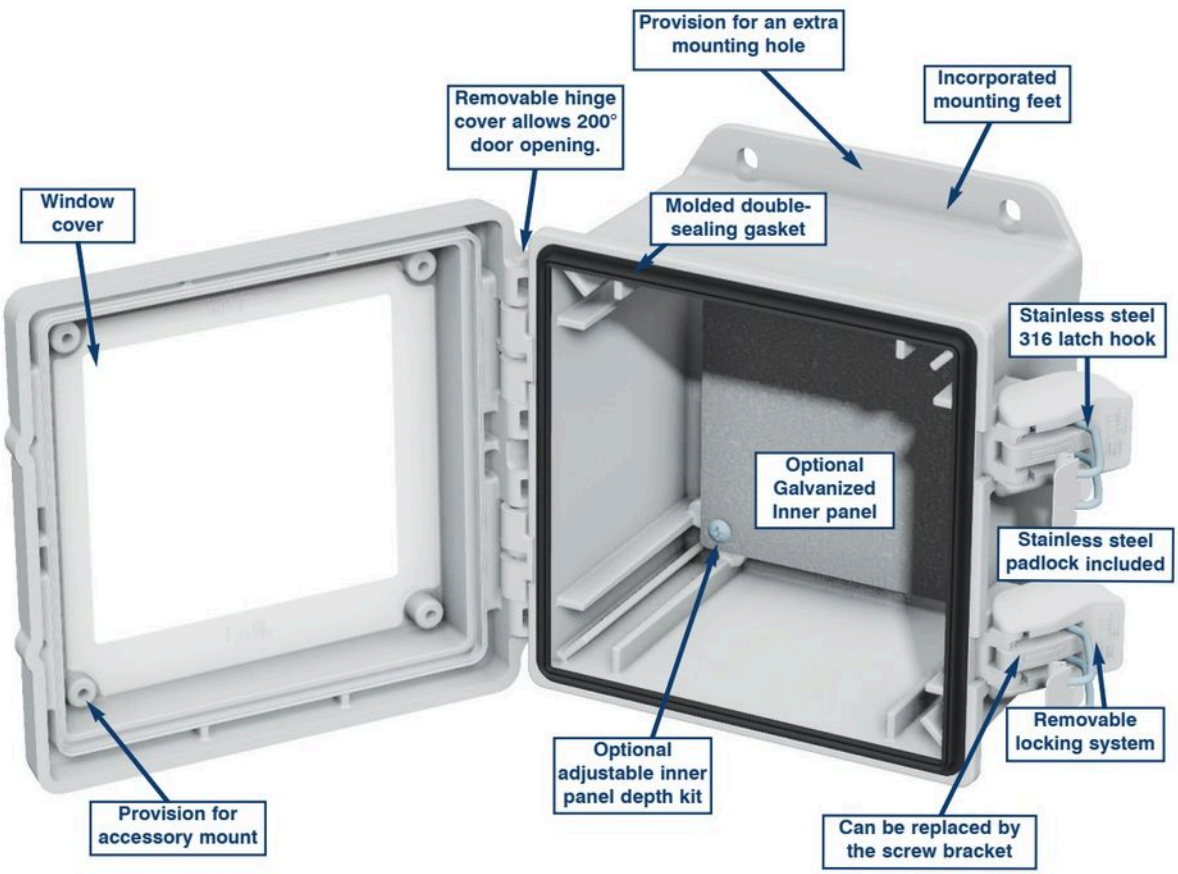

The 5600 ESPLQW Available only from EXM

NEMA 6P POLYESTER

QUICK RELEASE SUBMERSIBLE POLYESTER ENCLOSURES

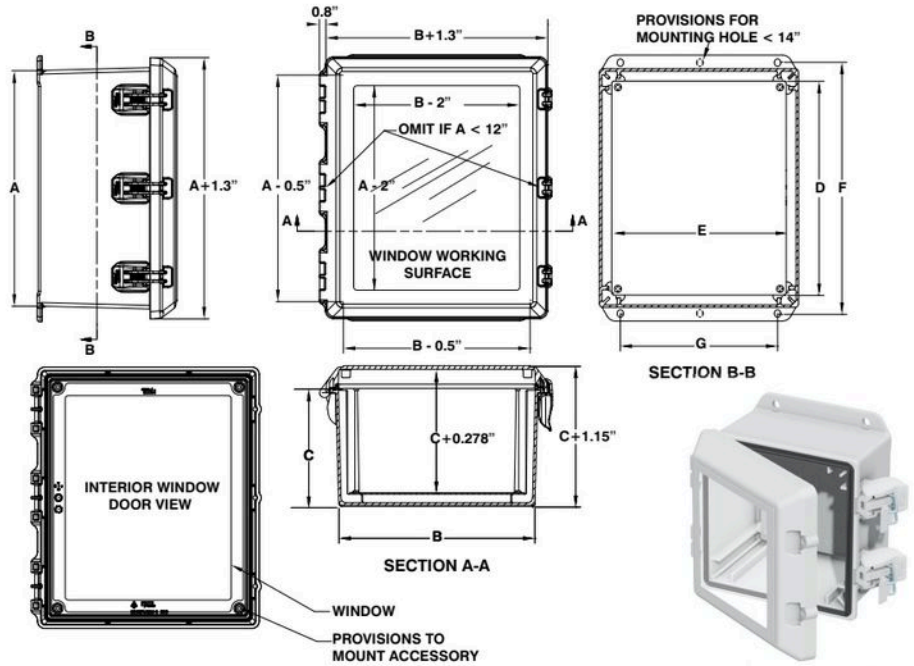

CATALOG NUMBER	DIMENSIONS A	B	C	D	E	F	G	EQUIPMENT PANEL FULL	SHIP WGHT LBS.
5600 ESPLQW060404	6	4	4	4.88	2.88	6.75	2	880 SP0604G	1
5600 ESPLQW060604	6	6	4	4.88	4.88	6.75	4	880 SP0606G	2
5600 ESPLQW080604	8	6	4	6.88	4.88	8.75	4	880 SP0806G	2
5600 ESPLQW080804	8	8	4	6.88	6.88	8.75	6	880 SP0808G	2
5600 ESPLQW100804	10	8	4	8.88	6.88	10.75	6	880 SP1008G	3
5600 ESPLQW100806	10	8	6	8.88	6.88	10.75	6	880 SP1008G	4
5600 ESPLQW101006	10	10	6	8.88	8.88	10.75	8	880 SP1010G	4
5600 ESPLQW121005	12	10	5	10.88	8.88	12.75	8	880 SP1210G	7
5600 ESPLQW121008	12	10	8	10.88	8.88	12.75	8	880 SP1210G	7
5600 ESPLQW121206	12	12	6	10.88	10.88	12.75	10	880 SP1212G	7
5600 ESPLQW141206	14	12	6	12.88	10.88	14.75	10	880 SP1412G	6
5600 ESPLQW141208	14	12	8	12.88	10.88	14.75	10	880 SP1412G	6
5600 ESPLQW161406	16	14	6	14.88	12.88	16.75	12	880 SP1412G	10
5600 ESPLQW161408	16	14	8	14.88	12.88	16.75	12	880 SP1614G	10
5600 ESPLQW161606	16	16	6	14.88	14.88	16.75	14	880 SP1616G	10
5600 ESPLQW161610	16	16	10	14.88	14.88	16.75	14	880 SP1616G	12
5600 ESPLQW201606	20	16	6	18.88	14.88	20.75	14	880 SP2016G	12
5600 ESPLQW202410	20	24	10	18.00	22.00	20.75	22	881 SP2024G	18
5600 ESPLQW242010	24	20	10	22.00	18.00	22.75	18	881 SP2420G	18

CATALOG NUMBER	METRIC DIMENSIONS A	B	C	D	E	F	G	EQUIPMENT PANEL FULL	SHIP WGHT KG.
5600 ESPLQW060404	152	101	101	124	73	171	51	880 SP0604G	0.45
5600 ESPLQW060604	152	152	101	124	73	171	102	880 SP0606G	0.91
5600 ESPLQW080604	203	152	101	175	124	222	102	880 SP0806G	0.91
5600 ESPLQW080804	203	203	101	175	175	222	152	880 SP0808G	0.91
5600 ESPLQW100804	254	203	101	226	175	273	152	880 SP1008G	1.36
5600 ESPLQW100806	254	203	152	226	175	273	152	880 SP1008G	1.65
5600 ESPLQW101006	254	254	152	226	226	273	203	880 SP1010G	1.81
5600 ESPLQW121005	304	254	127	276	226	324	203	880 SP1210G	3.18
5600 ESPLQW121008	304	254	203	276	226	324	203	880 SP1210G	3.18
5600 ESPLQW121206	304	304	152	276	276	324	203	880 SP1212G	3.18
5600 ESPLQW141206	356	304	152	327	276	375	254	880 SP1412G	2.72
5600 ESPLQW141208	356	304	203	327	276	375	254	880 SP1412G	2.72
5600 ESPLQW161406	406	356	152	378	327	425	305	880 SP1614G	4.54
5600 ESPLQW161408	406	356	203	378	327	425	305	880 SP1614G	4.54
5600 ESPLQW161606	406	406	152	378	378	425	356	880 SP1616G	4.54
5600 ESPLQW161610	406	406	254	378	378	425	356	880 SP1616G	5.44
5600 ESPLQW201606	508	406	152	480	378	527	356	880 SP2016G	5.44
5600 ESPLQW202410	508	609	254	457	559	527	559	881 SP2024G	7.26
5600 ESPLQW242010	609	508	254	559	457	578	457	881 SP2420G	7.26

DATA SUBJECT TO CHANGE WITHOUT NOTICE.