AIR CONDITIONERS

EXTRA SLIM VERTICAL MOUNT AIR CONDITIONER - 2200 TO 3000 BTU

The IQ2200VS slim vertical mount air conditioners are used to reduce heat accumulation within enclosures and maintain a safe operating temperature.
These units use closed-loop cooling technology, which removes heat without letting outside air into the sealed enclosure. All units feature a digital programmable temperature controller with an alarm. The air conditioners feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A built-in condensate evaporation package is included. The units are powered by an efficient, quiet and long lasting rotary compressor, with a CFC-free refrigeration system. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel.

UL / ULc Listed,
NEMA/EEMAC 12 / IP55
Steel units: NEMA 4 w/N4GK kit
SS units: NEMA 4X w/N4GK kit

FEATURES

- Digital temperature controller with alarm
- Durable 16 gauge welded steel construction
- Also available in stainless steel
- Built in condensate evaporator
- Easy pull-out filter
- Efficient, quiet and long lasting rotary compressor
- Environment friendly HFC refrigerant
- Space saving aesthetic cabinet design
- 100% factory tested
- Designed to mount on side of enclosure while maintaining NEMA type 12, 4 or 4X integrity



IQ 2200 VXS
IQ 3000 VXS



IQ 2200 VXS SS
IQ 3000 VXS SS

AIR FLOW DIAGRAM

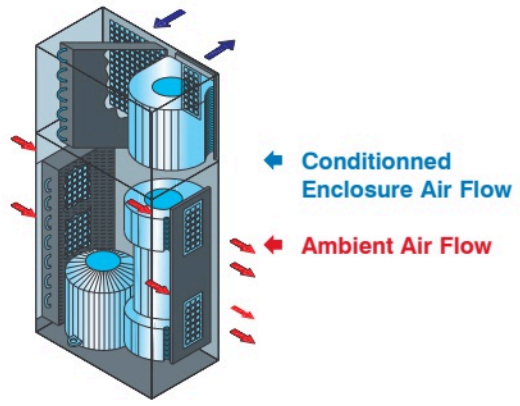

N4GK NEMA 4/4X Gasket Kit	Ambient Corrosive Package	External Alarms Audible & Visual	Remote IQ-X Controller
p.794	p.794	p.794	p.794

AIR CONDITIONERS

EXTRA SLIM VERTICAL MOUNT AIR CONDITIONER - 2200 TO 3000 BTU

CATALOG NUMBER		BTU /HR	VOLTS /HZ	MAX. AMPS	MAX. TEMP	DIMENSIONS			SHIP WGHT LBS.
MILD STEEL	STAINLESS STEEL					H	W	D	
IQ2200VS-126	IQ2200VS-126-SS	2200	120/60	6.6	131°F	30.09	12.27	6.34	55
IQ2200VS-236	IQ2200VS-236-SS	2200	230/60	3.3	131°F	30.09	12.27	6.34	55
IQ2200VS-480	IQ2200VS-480-SS	2200	480/60	1.6	131°F	34.12	12.27	6.34	70
IQ3000VS-126	IQ3000VS-126-SS	3000	120/60	6.9	131°F	30.09	12.27	6.34	55
IQ3000VS-236	IQ3000VS-236-SS	3000	230/60	3.4	131°F	30.09	12.27	6.34	55
IQ3000VS-480	IQ3000VS-480-SS	3000	480/60	1.5	131°F	34.12	12.27	6.34	70

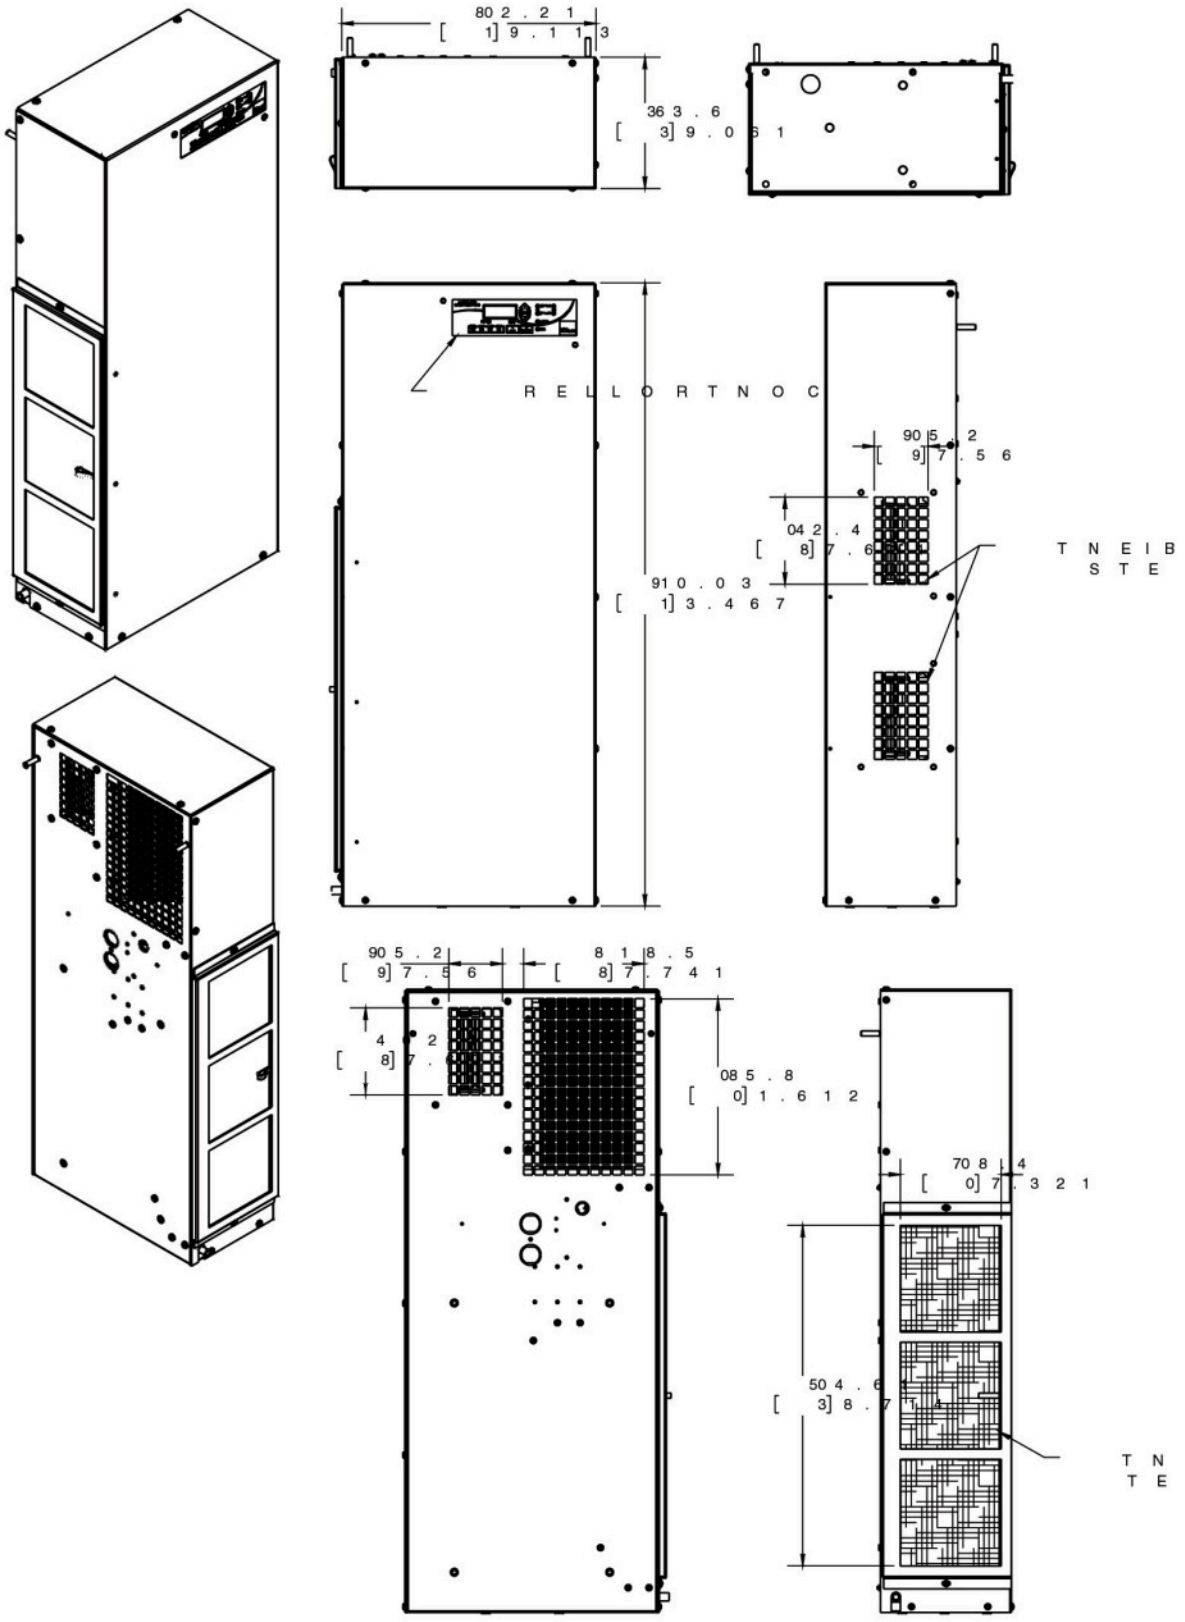

DATA SUBJECT TO CHANGE WITHOUT NOTICE.