# AIR CONDITIONERS



## TOP MOUNT AIR CONDITIONER - 3000 TO 4500 BTU

**The IQ3000T** top mount air conditioners are used to reduce heat accumulation within enclosures and maintain a safe operating temperature.
These units use closed-loop cooling technology, which removes heat without letting outside air into the sealed enclosure. All units feature a digital programmable temperature controller with an alarm. The air conditioners feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A built-in condensate evaporation package is included. The units are powered by an efficient, quiet and long lasting rotary compressor, with a CFC-free refrigeration system. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel.

**UL / ULc Listed,**
**NEMA/EEMAC 12 / IP55**
**Steel units: NEMA 4 w/N4GK kit**
**SS units: NEMA 4X w/N4GK**

### FEATURES

- Digital temperature controller with alarm
- Durable 16 gauge welded steel construction
- Also available in stainless steel
- Built in condensate evaporator
- Easy pull-out filter
- Efficient, quiet and long lasting rotary compressor
- Environment friendly HFC refrigerant
- Space saving aesthetic cabinet design
- 100% factory tested
- Designed to mount on side of enclosure while maintaining NEMA type 12, 4 or 4X integrity
- Designed to mount on side of enclosure while maintaining NEMA type 12, 4 or 4X integrity



IQ 3000 T
IQ 4500 T



IQ 3000 T SS
IQ 4500 T SS

AIR FLOW DIAGRAM

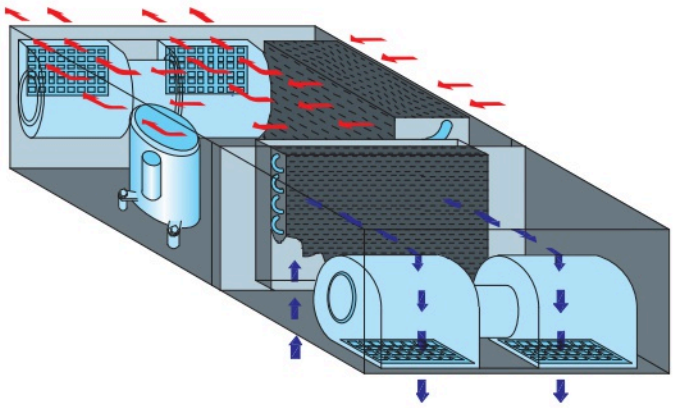

Conditionned Enclosure Air Flow

Ambient Air Flow

| N4GK NEMA 4/4X Gasket Kit | Ambient Corrosive Package | External Alarms Audible & Visual | Remote IQ-X Controller |
|---|---|---|---|
| p.794 | p.794 | p.794 | p.794 |

# AIR CONDITIONERS

## TOP MOUNT AIR CONDITIONER - 3000 TO 4500 BTU

| CATALOG NUMBER | | BTU /HR | VOLTS /HZ | MAX. AMPS | MAX. TEMP | DIMENSIONS | | | SHIP WGHT LBS. |
|---|---|---|---|---|---|---|---|---|---|
| MILD STEEL | STAINLESS STEEL | | | | | H | W | D | |
| IQ3000T-126 | IQ3000T-126-SS | 3000 | 120/60 | 7.5 | 131°F | 12.06 | 19.94 | 19.94 | 72 |
| IQ3000T-236 | IQ3000T-236-SS | 3000 | 230/60/50 | 3.9 | 131°F | 12.06 | 19.94 | 19.94 | 72 |
| IQ4000T-126 | IQ4000T-126-SS | 4000 | 120/60 | 8.5 | 131°F | 12.06 | 19.94 | 19.94 | 72 |
| IQ4000T-236 | IQ4000T-236-SS | 4000 | 230/60/50 | 4.1/4.6 | 131°F | 12.06 | 19.94 | 19.94 | 72 |

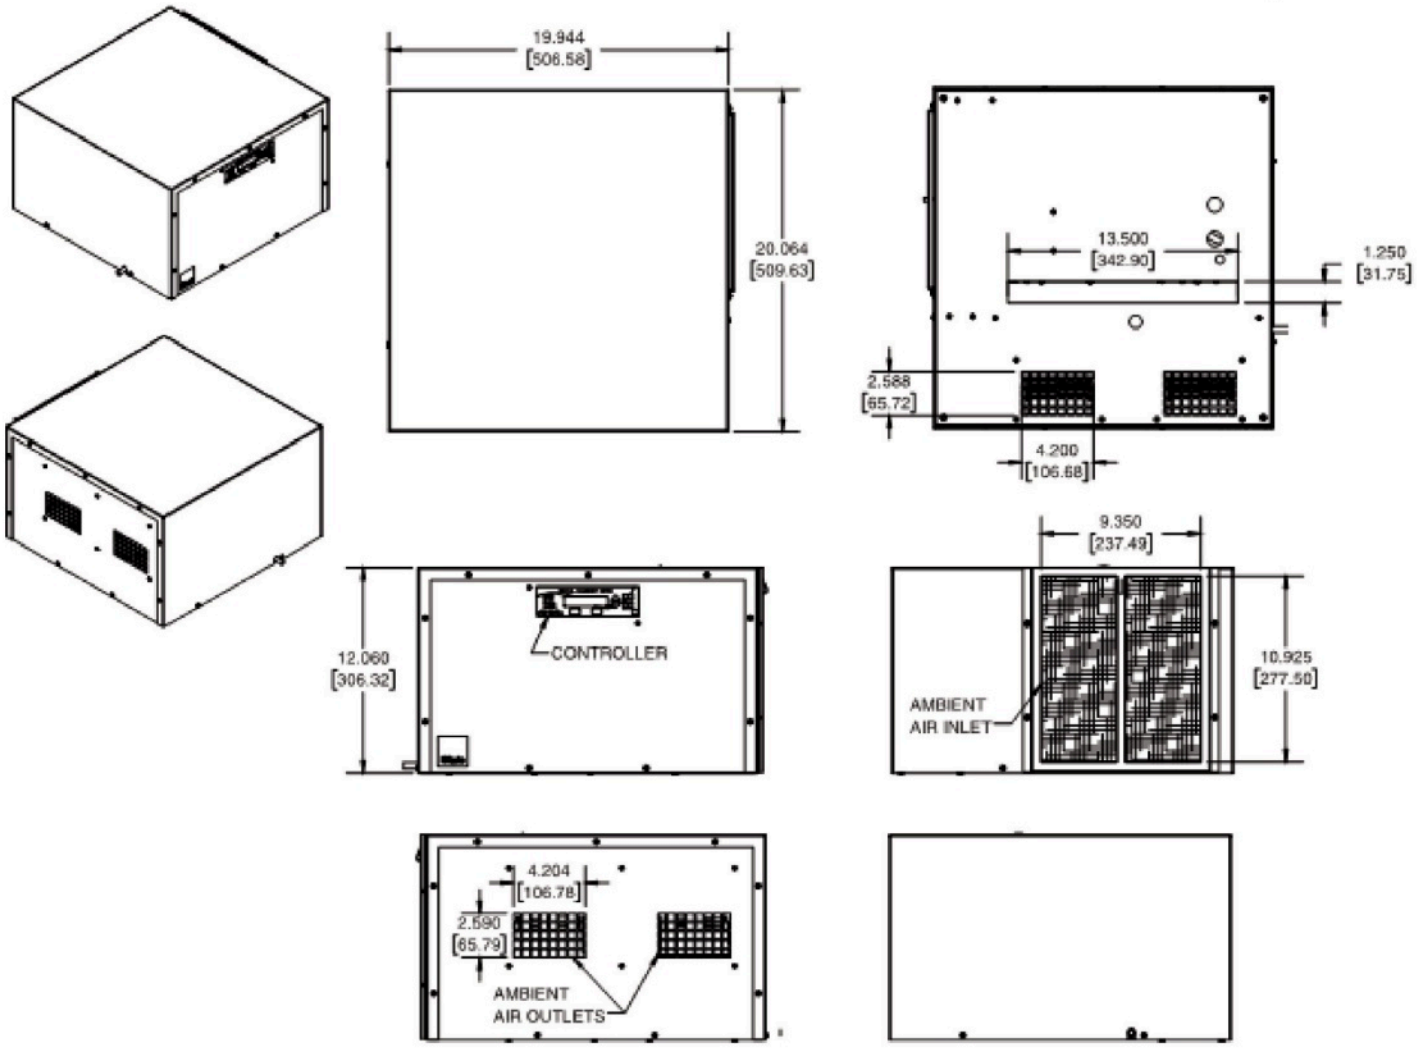


N4GK NEMA 4/4X Gasket Kit p.794
Ambient Corrosive Package p.794
External Alarms Audible & Visual p.794
Remote IQ-X Controller p.794



DATA SUBJECT TO CHANGE WITHOUT NOTICE.