



IM10D - IM36D Series 10 - 36 Watts

UL, EN, IEC 60601-1 3rd Edition Medical Power Supply
Interchangeable Plug, Efficiency Level V & VI

Date: 4/30/14

Rev: 043014

Page: 1 of 3

The IM10D - IM36D Series is an ultra-efficient, wall plug-in style switch mode power supply with 6 Interchangeable Input Plugs, enabling the unit to be used worldwide. It offers 10 Watts - 36 Watts output with UL/cUL, IEC and EN 60601-1 3rd Edition safety approvals, and is tested to Energy Efficiency Level 5 & 6 to meet future applications.




Input Voltage	90 to 264 Vac
Input Frequency	47 to 63 Hz
Input Current (Low Line)	1 A Max at 115 Vac
Input Current (High Line)	0.5 A Max at 230 Vac
Safety Ground Leakage Current	0.1 mA Max at 240 Vac, Full Load
Output Voltage & Current	See Table on Page 2
Ripple & Noise (P-P)	See Table on Page 2
Over-Voltage Protection	150% Max
Short Circuit Protection	Auto-Recovery
Temperature Coefficient	± 0.04% / °C Max
Dynamic Load Regulation	from 100% to 50% Load Change: ± 5% of Output Voltage
Efficiency	Meets Energy Efficiency V & VI Criteria
No Load Power Consumption	Energy Efficiency Level V: ≤ 0.3 Watts Energy Efficiency Level VI: ≤ 0.1 Watts
Line Regulation	± 1% Max at Full Load
Load Regulation	± 5% Max at 230 Vac
Start-Up Time	3 s Max
Hold-Up Time	8.3 ms Min
Inrush Current	30 A @ 115 Vac Max at 25°C Cold Start 60 A @ 230 Vac Max at 25°C Cold Start
Withstanding Voltage	4242 Vdc between primary and secondary
Insulation Resistance	50 MΩ Min
Mean Time Between Failure	Full Load at 25°C Ambient: 100,000 Hours Min
Operating Temperature	See Derating Curve
Storage Temperature	-20 to 85 °C
Industry Compliance	Directive 2011/65/EU (RoHS 2), Energy Efficiency Level V & VI
EMI Requirements	Meets Conduction Limits of: FCC Part 15 Class B, CISPR-22 Class B and EN 55022 Class B
Safety Compliance	ANSI/AAMI ES 60601-1:2005 (UR Listed 3rd Edition), EN 60601-1:2006 (TUV/T-mark 3rd Edition), CB, CE, FCC, CCC

Features:

- Universal Input 100 - 240 Vac
- Available with U.S., European, British, Australian, China and South Africa/India Input Plugs
- Over-Voltage Protection
- Short Circuit Protection
- 250 V, 2 A Input Fuse
- 100% Burn-In
- RoHS 2 Compliant
- Energy Efficiency Level: V, VI

Derating Curve

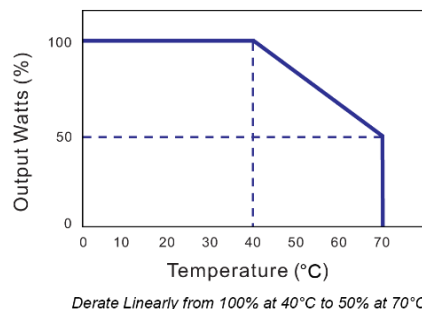



IM10D - IM36D Series 10 - 36 Watts

UL, EN, IEC 60601-1 3rd Edition Medical Power Supply
Interchangeable Plug, Efficiency Level V & VI

Date: 4/30/14

Rev: 043014

Page: 2 of 3

Output Voltage and Current Table

Model Number	Output Voltage Range *	Maximum Output Current †	Maximum Output Power
IM10D_05R	5 Vdc	2.00 A	10 W
IM15D_05R	5 Vdc	3.00 A	15 W
IM15D_10R	10 Vdc	1.50 A	15 W
IM18D_06R	6 Vdc	3.00 A	18 W
IM18D_09R	9 Vdc	2.00 A	18 W
IM20D_ _ _ R	5 - 48 Vdc	4.00 - 0.41 A	20 W
IM24D_ _ _ R	6 - 24 Vdc	4.00 - 1.00 A	24 W
IM27D_ _ _ R	9 - 11 Vdc	3.00 - 2.45 A	27 W
IM30D_ _ _ R	12 - 24 Vdc	2.50 - 1.25 A	30 W
IM30D_ _ _ R	36 - 48 Vdc	0.83 - 0.63 A	30 W
IM36D_12R	12 Vdc	3.0 A	36 W
IM36D_24R	24 Vdc	1.5 A	36 W

* Output Voltages between ranges are also available.

† To find Output Current:

Output Current = Max Power ÷ Output Voltage

Example: Output Current for IM24D_12R
(12 Vdc Output)

Output Current = 24 W ÷ 12 V
Output Current = 2 A

IM□□D□□□R

Output Voltage: See Table (Output Voltage)

Input Plug:

- U = U.S. Plug (US)
- E = European Plug (EU)
- B = British Plug (UK)
- R = Australian Plug (AU)
- C = China Plug (CN)
- S = South Africa/India Plug (ZA)
- K = Kit with US, UK, EU, and AU plug.

Output Power: See Table (Model Number)



TECHNOLOGIES INC.
HICKSVILLE, NEW YORK

264 Duffy Avenue
Hicksville, NY 11801

Tel: (516) 433-1313
Fax: (516) 433-1457

Web: www.apxonline.com
Email: sales@apxonline.com

© Copyright 1978
APX Technologies, Inc.



IM10D - IM36D Series 10 - 36 Watts

UL, EN, IEC 60601-1 3rd Edition Medical Power Supply
Interchangeable Plug, Efficiency Level V & VI

Date: 4/30/14

Rev: 043014

Page: 3 of 3

Mechanical Specification (mm)

