


Solid State Timers and Controllers

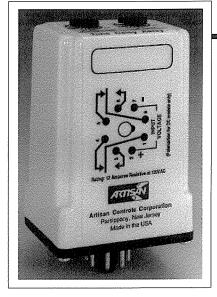

MECHANICAL & WIRING

%

2 4 1 0

DELAY-ON-MAKE TIMER

The 2410 is a delay-on-make timer controlling a DPDT set of relay contacts. The 2410 is available in a range of both AC and DC models. When operating voltage is applied the timing period begins. At the end of the timing period the output contacts transfer and remain transferred for a slong as the operating voltage is applied. To recycle the timer the operating voltage must be removed and re-applied.

Timing Mode: DELAY-ON-MAKE

Operating Voltage: See Ordering Information.

Adjustable Timing Ranges: See Ordering Information.

Purchase Tolerance: Low time: +0%, -50%, High time: -0%, +50%. Ex: Timing range -3, (2 - 1000 seconds), can range from 1 to $15^{\circ}00$ seconds, with 2 - 1000 seconds as a guaranteed minimum range.

Repeatability Of Timing Periods: ±2%

Timing/Temperature Coefficient: ±0.25%/°C

Recycle Time: Operating voltage must be removed for a minimum of 100 milliseconds to assure that the timing circuits are reset.

1.8 MAX Output Relay: DPDT contacts - 12A at 125V AC UL E88991 &

CSA LR90143, 10A 125V AC TUV R9452021.

Terminations: Octal plug-in type.

Dielectric: 1,200V rms between open contact sets, 1,500V rms


between contacts and operating voltage terminals.

Transient Protection: Protected by silicon transient suppressors responding to transients within 1x10⁻¹² seconds to a peak pulse power dissipation of 1500 watts.

power dissipation of 1500 watts.

Operating Temperature: 0°C to +70°C

Data Sheet Revision Date: July 15, 1999

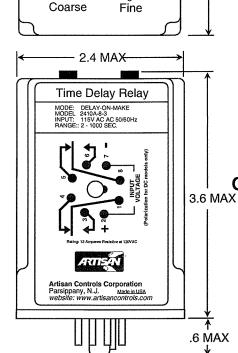

PART NUMBER	OPERATING VOLTAGE		TIMING RANGE (ALL TIMES IN SECONDS)	
2410A -	-2	(12V DC)	-1	0.1 - 30.0
	-3	(24V DC)	-3	2 - 1000
	-6	(24V AC)		
	-8	(115V AC)	-5	30 - 8000
FOR OTHER VOLTAGES AND TIMING RANGES - CONSULT FACTORY				

EXAMPLE: Model 2410A - 2 - 1

(12 DC WITH TIMING RANGE OF 0.1 TO 30 SECONDS)

VISIT OUR WEB SITE AT: WWW.ARTISANCONTROLS.COM

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design.

