



Carling Technologies®
Innovative Designs. Powerful Solutions.

SWITCHES & CONTROLS

Rocker, Toggle, Pushbutton & Rotary



CATALOG

FOUNDED IN 1920



Since its founding, Carling Technologies has continually forged a tradition of leadership in quality and product innovation.

There are few products that Carling Technologies hasn't turned "ON" and fewer industries that haven't turned to Carling for solutions. With ISO and TS registered manufacturing facilities and technical sales offices worldwide, Carling ranks among the world's largest manufacturers of circuit breakers, switches, power distribution units, digital switching systems and electronic controls.



SWITCHES & CONTROLS

- Rocker
- Toggle
- Pushbutton
- Rotary

CIRCUIT PROTECTION

- Hydraulic-Magnetic
- Thermal
- GFCI / ELCI

CUSTOM SOLUTIONS

- PDU's
- Keypads
- Control Modules

MULTIPLEXED POWER SYSTEMS

- HMI Devices & I/O Modules
- Programmable Displays
- Data Communication Interfaces
- Electrical Systems Monitoring

STRATEGIC MARKETS SERVED:



On/Off Highway



Marine



Telecom/Datacom



Military



Renewable Energy

GLOBAL LOCATIONS:

Carling Technologies
World Headquarters
Plainville, CT, USA
ISO 9001:2008
ISO/TS 16949:2009

Maretron
Phoenix, AZ, USA

Carling Technologies
Brownsville, TX, USA
ISO 14001:2004
ISO 9001:2008
ISO/TS 16949:2009

Carling Technologies
Matehuala, Mexico
ISO 14001:2004
ISO 9001:2008
ISO/TS 16949:2009

Carling Technologies
Jupiter, FL, USA

Carling Technologies
European Headquarters
Exeter, UK
ISO 9001:2008
ISO/TS 16949:2009

Carling Technologies
Kowloon, Hong Kong
ISO 9001:2008
ISO/TS 16949:2009

Carling Technologies
Zhongshan, China
ISO 14001:2004
ISO 9001:2008
ISO/TS 16949:2009

OTHER SERVED INDUSTRIES:



Medical



Industrial Control



Audio / Visual



Commercial Food



HVAC



Floor Care



Generators



Small Appliances



Security Systems



Test & Measurement

WORLDWIDE NUMBERS:



2000+
EMPLOYEES



150+
ENGINEERS




70+
DISTRIBUTORS



50+
REP FIRMS

COMPETITIVE ADVANTAGES⁺



Vertical
Integration





Reliable &
On-Time Delivery



Excellent
Customer Service



Innovative &
Eco-Friendly Products

Table of Contents	Page		Page
Product Selector Guide	2	L-Series	<i>Paddle Actuator</i> 95
Full-Sized Rocker Switches		LP-Series	<i>Illuminated Indicators</i> 96
Tippette Switches	5	ST-Series	<i>AC/DC, 1P/2P, IP67</i>113
TIL/TIG-Series <i>Non-Illuminated, 1P/2P</i>	6	Controls	
TIH/TII-Series <i>Non-Illuminated, 3P/4P</i>	6	LD-Series	<i>Dimmer</i> 99
LTIL-Series <i>Illuminated, 1P</i>	6	LMR-Series	<i>Mirror Rotate</i> 102
LTIG/LTIH-Series <i>Illuminated, 2P/3P</i>	6	LW-Series	<i>Washer/Wiper</i> 104
Tippette Rocker and Bracket Styles	7	N-Series	<i>Addressable</i> 107
Tippette Actuator Styles	8	Standard Legend Imprinting	159
Tippette Mounting Bracket Styles	9	Toggle Switches	
LS-Series <i>Softspot® Illuminated, 1P</i>	10	LT-Series	<i>Illuminated</i> 112
S-Series <i>Bezel-less</i>	12	F-Series	<i>1 Pole</i> 114
Mid-Sized Rocker Switches		G-Series	<i>2 Pole</i> 116
T-Series <i>Mini-Tippette®, Non-Illuminated, 1P</i>	16	H-Series	<i>3 Pole</i> 118
LTA-Series <i>Mini-Tippette®, Illuminated, 1P</i>	18	I-Series	<i>4 Pole</i> 118
TG/LTG-Series <i>1P or 2P</i>	20	C-Series	<i>Heavy Duty 20 Amp</i> 120
TTG-Series <i>2 Independent Switches, 2P</i>	22	D-Series	<i>Double Insulated all Nylon</i> 122
TLG-Series <i>Adjacent Indicator Light, 1P</i>	24	110-Series	<i>Quick Make/Break, AC/DC</i> 124
Circuit Designation Chart	26	DK/EK-Series	<i>Heavy Duty, AC/DC</i> 126
RR/LRR-Series <i>Round, with or without Illumination, 1P</i>	27	MAAOA/215	<i>High Temperature</i> 128
R/RSC-Series <i>Curvette®, Non-Illuminated, 1P</i>	29	Hexboot Accessories.....	130
LRA-Series <i>Curvette®, Illuminated, 1P</i>	31	Hardware Accessories	131
RG-Series <i>Super Curvette®, Non-Illuminated, 1P/2P</i> ... 33		Pushbutton Switches	
LRG-Series <i>Super Curvette®, Illuminated, 2P</i>	35	16-3P-Series	<i>Light Actuation Force</i> 132
Small-Sized Rocker Switches		172-Series	<i>High-Amperage, Momentary</i> 134
610/620-Series <i>Non-Illuminated, 1P or 2P</i>	37	P26-Series	<i>AC Rated with Metal Cap</i> 136
611/621-Series <i>Rocker/Paddle/Visi-Rocker®, 1P/2P</i>	39	P27-Series	<i>AC Rated with Plastic Cap</i> 138
622/632-Series <i>With or without Illumination</i>	41	641-Series	<i>1-3 Pole Maintained for Foot Controls</i> 140
651/652-Series <i>Non-Illuminated, 1P</i>	43	110-Series	<i>AC/DC for Foot Controls</i> 143
Sealed Switches		P-Series	<i>Metal Construction Heavy Duty</i> 145
V-Series <i>Rocker Actuator</i>	45	PP-Series	<i>Plastic Construction Heavy Duty</i> 147
V-Series <i>Paddle Actuator</i>	56	Hardware Accessories	131
V-Series  <i>Rotary</i>	64	Rotary	
V-Series  <i>V-Charger Dual Port USB 2.0</i>	71	R135-Series	<i>ON-OFF Repeating Action</i> 149
V-Series <i>Actuators Separately</i>	75	700/800-Series	<i>Up to 8 Positions</i> 151
V-Series <i>Accessories</i>	76	V-Series 64
VP-Series <i>Illuminated Indicators</i>	78	Terminology/Agency Approvals	154
W-Series <i>Fully Submersible</i>	81		
L-Series <i>Rocker Actuator</i>	86		

Switches and Controls, Carling Technologies is the leading manufacturer of switches and controls serving OEMs worldwide. Carling Technologies broad product range offers a full line of rocker, toggle, pushbutton, rotary and mini switches for a wide variety of applications. Featuring cutting edge designs and advanced features, Carling products are well known for their performance and reliability.

Within This Catalog, you will find comprehensive product information for each product series including applications, performance specifications and ordering schemes.







Available Online are tools such as a part configurator, product selectors and stock checks. Please visit www.carlingtech.com for the latest information on all our products.

Application Solution Engineers are readily available to assist you in selecting the appropriate product for your application. For further assistance, please email us at custservice@carlingtech.com

Custom Design Solutions can be tailor-made for most any application using our extensive engineering resources.





Other Products such as hydraulic-magnetic, thermal and ground fault circuit breakers are also available.







	SEALED SWITCHES			
	 <i>V-Rotary</i>	 <i>V-Series</i>	 <i>W-Series</i>	 <i>L-Series</i>
Poles	1, 2	1, 2	1, 2	1, 2
Ratings	up to 15A 12/24VDC	up to 15A 24VDC 15A 125VAC 10A 250VAC	up to 10A 24VDC	up to 15A 125VAC 10A 250VAC 20A 18VDC
Sealing / Actuator	IP67, rotary knob	IP66, rocker, paddle, locking rocker	IP68 including connector, bezel-less rocker, paddle & locking rocker	IP67, rocker, paddle, locking rocker
Mounting Hole Specifications	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount	.867" x 1.734" [22mm x 44mm] snap-in mount
Termination	.250 tabs solder lug wire leads	.250 tabs solder lug wire leads	.110 tabs	.187 tab .250 tabs
Illumination	incandescent, LED, neon	incandescent, LED, neon	LED	incandescent, LED
Approvals	pending	UL, CSA, VDE	n/a	n/a

	FULL-SIZED ROCKERS		MID-SIZED AND SMALL-SIZED ROCKERS			
	 <i>S-Series</i>	 <i>TIG / LTIG / TIH / LTIH / TIL / LTIL / TII / LS</i>	 <i>RR / LRR</i>	 <i>R / LRA / RSC / RG / LRG</i>	 <i>620 / 621 / 622 / 632 / 651</i>	 <i>T / LTA / TG / LTG / TLG / TTG</i>
Poles	1, 2	1, 2, 3, 4	1	1, 2	1, 2	1, 2
Ratings	up to 10A 28VDC	up to 15A 125VAC 10A 250VAC	up to 12A 125VAC 10A 250VAC	up to 20A 125VAC 15A 250VAC	up to 12A 125VAC 10A 250VAC 8A 250VAC 1/2 HP 125-250VAC	up to 20A 125VAC 10A 250VAC
Actuator	bezel-less rocker	rocker, paddle	rocker	rocker, paddle	rocker, paddle	rocker, lever, paddle, plunger, toggle (bat)
Mounting Hole Specifications	.787" x 1.575" snap-in, keyed	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount screw mount	.795" [20.2mm] round snap-in mount	.480" x 1.072" [12.19mm x 27.23mm] .866" x 1.182" [22mm x 30mm] snap-in mount	.508" x .756" [12.9mm x 19.2mm] snap-in mount	.550" x 1.125" [13.97mm x 28.57mm] 1.00" x 1.125" [25.4mm x 28.57mm] snap-in mount
Termination	.110 Tabs	.187 tab solder lug .250 tabs screw terms wire leads	.187 tab	solder lug .250 tabs wire leads PC terms	.187 tab solder lug wire leads PC terms	.187 tab solder lug .250 tabs wire leads
Illumination	LED	incandescent, neon	incandescent, neon	incandescent, neon	incandescent, LED, neon	incandescent, neon
Approvals	n/a	UL, CSA, VDE	UL, cUL	UL, CSA, VDE	UL, CSA, VDE	UL, CSA






*Options and approvals shown may apply to specific construction combinations only, consult factory for clarification.




Manufacturer reserves the right to change product specifications without prior notice.

	CONTROLS				
					
	<i>LD Dimmer</i>	<i>LMR Mirror</i>	<i>LW Wiper</i>	<i>N-Series</i>	<i>V-Charger</i>
Poles	multi-function	multi-function	multi-function	1	1
Ratings	up to 10A 12VDC 5A 24VDC	up to 1A 14VDC .5A 28VDC	up to 8A 14VDC 4A 28VDC	.4VA 28VDC	12V/24VDC
Actuator	rocker, paddle	joystick	rocker, paddle	rocker, paddle	sealed spring-loaded access doors
Mounting Hole Specifications	.867" x 1.734" [22mm x 44mm] snap-in mount	.867" x 1.734" [22mm x 44mm] snap-in mount	.867" x 1.734" [22mm x 44mm] snap-in mount	.867" x 1.734" [22mm x 44mm] snap-in mount	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount
Termination	.250 tabs	wire leads with connector	.187 tabs	.187 tabs	.250 tabs
Illumination	LED	n/a	LED	LED	LED
Approvals	n/a	n/a	n/a	n/a	n/a

	TOGGLE SWITCHES					
						
	<i>LT-Series</i>	<i>F / G / H / I</i>	<i>C / D</i>	<i>110-Series</i>	<i>DK / EK</i>	<i>MAAOA / 215</i>
Poles	1, 2	1, 2, 3, 4	1	1, 2	1, 2	1
Ratings	up to 15A 125VAC 10A 250VAC 15A 12-28VDC	up to 20A 125VAC 20A 277VAC 2 HP 250VAC	up to 20A 125VAC 10A 250VAC	up to 6A 125VAC/DC 3A 250VAC/DC	up to 20A 125VAC/DC 10A 250VAC/DC	up to 20A 125VAC 10A 250VAC 1/2HP 125- 250VAC
Actuator	paddle, toggle (bat)	paddle, toggle (bat)	paddle, toggle (bat)	toggle (bat), toggle (ball)	toggle (bat), toggle (ball)	toggle (bat)
Mounting Hole Specifications	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.656" x 1.218" [16.66mm x 30.54mm] snap-in mount
Termination	.187 tabs solder lug .250 tabs screw terms wire leads PC terms	.187 tabs solder lug .250 tabs screw terms wire leads PC terms	solder lug .250 tabs screw terms wire leads	solder lug .250 tabs screw terms wire leads	screw terms	.250 tabs screw terms wire leads
Illumination	incandescent, neon	n/a	n/a	n/a	n/a	n/a
Approvals	n/a	UL, CSA, VDE	UL, CSA	UL, CSA	UL, CSA	UL, CSA

*Options and approvals shown may apply to specific construction combinations only, consult factory for clarification.

	PUSHBUTTON				
	 <i>16-3P</i>	 <i>170 / 172</i>	 <i>P26 / P27</i>	 <i>641 / 110</i>	 <i>P / PP</i>
Poles	1	1	1	1, 2, 3	1
Ratings	up to 3A 125VAC	up to 15A 125VAC 10A 250VAC	up to 6A 125VAC 3A 277VAC	up to 5A 125VAC 2A 250VAC	up to 20A 125VAC 10A 250VAC
Mounting Hole Specifications	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount	.500" dia [12.7mm] bushing mount
Termination	solder lug wire leads	solder lug screw terms wire leads	.250 tabs solder lug wire leads	solder lug wire leads PC terms	.250 tabs screw terms wire leads
Approvals	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA, TUV

	ROTARY		
	 <i>R135</i>	 <i>700 / 800</i>	 <i>V-Rotary</i>
Poles	1	1	1, 2
Ratings	1.5A 250VAC 3A 125VAC 5A 12VDC	up to 3A 250VAC 6A 125VAC	up to 15A 24VDC 20A 12VDC
Actuator	round	asymmetrical	ergonomic knob
Mounting Hole Specifications	.375" dia [9.52mm] bushing mount .500" dia [12.7mm] snap-in mount	.500" dia [12.7mm] bushing mount	.830" x 1.450" [21.08mm x 36.83mm] snap-in mount
Termination	wire leads	.125 tabs solder lug .250 tabs	solder lug .250 tabs wire leads
Illumination	n/a	n/a	incandescent, LED
Approvals	UL, CSA	UL, CSA	pending

*Options and approvals shown may apply to specific construction combinations only, consult factory for clarification.

Tippette

FULL SIZED ROCKER SWITCHES

The Tippette Series is a traditionally styled rocker switch, available in sealed or unsealed versions. These switches are appropriate for use in general purpose applications which may or may not require a modicum of environmental protection. The Tippette Series is available in both illuminated and non-illuminated versions and features a wide variety of circuits, actuator styles and bracket options. This versatile offering includes international agency certifications and ratings to 26 amps for select circuits.



Electrical

Contact Rating	15 amps, 125 VAC 10 amps, 250 VAC 3/4 HP 125-250 VAC
Life	15 amps, 12-30 VDC 25,000 cycles circuit dependent 50,000 cycles circuit dependent consult factory for applicable circuits.
Contacts	Fine silver, silver cad-oxide
Terminals	Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug - Brass Tin Plated Wire Lead 16 gauge standard 105°C 600VAC Screw Terminals - Brass

Physical


Lighted	Incandescent - rated 10,000 hours Neon - rated 25,000 hours
Seals	Bracket - Actuator WBL/MBL optional external gasket panel seal
Base	Phenolic (150°C)
Rocker/Bracket	Nylon 66 (105°C)

Mechanical

Endurance	100,000 cycles minimum
-----------	------------------------

Mounting

MOUNTING HOLE
(Nylon Snap-in Brackets)
Panel Thickness:
.040 min. - .250 max.

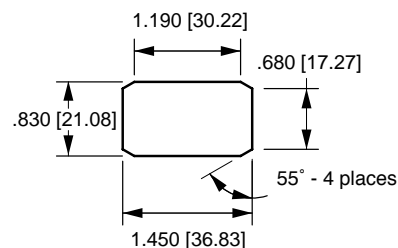

*Angled corners are suggested for optimum fit.
Standard rectangular cutout is acceptable.

Agency Certifications



Select circuits and constructions with VDE/IEC approvals are available. Consult factory

*Manufacturer reserves the right to change product specification without prior notice.

TIGA51 - 6M - BL - MBL

¹
Base Part Number²
Actuator Style³
Actuator Color⁴
Bracket**1 BASE PART NUMBER: SERIES/POLES / CIRCUITRY ^{8,11} / RATING ⁷ / TERMINATION ¹⁰****10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 6-28VDC****Single Pole in Double Pole base ²**

solder lug	.250 tab	screw term.	wire leads	
TIGA50	TIGA51	TIGA54	TIGA55	On-None-Off
TIGA5A	TIGA5B	TIGA5E	TIGA5F	(On)-None-Off
TIGA5L	TIGA5M	TIGA5S	TIGA5T	On-None-(Off)
TIGB50	TIGB51	TIGB54	TIGB55	On-None-On
TIGB5A	TIGB5B	TIGB5E	TIGB5F	On-None-(On)
TIGC50	TIGC51	TIGC54	TIGC55	On-Off-On
TIGC5A	TIGC5B	TIGC5E	TIGC5F	On-Off-(On)
TIGC5L	TIGC5M	TIGC5S	TIGC5T	(On)-Off-(On)

Three Pole

solder lug	.250 tab	screw term.	wire leads	
TIHK50	TIHK51	TIHK54	TIHK55	On-None-Off
TIHK5A	TIHK5B	TIHK5E	TIHK5F	(On)-None-Off
TIHK5L	TIHK5M	TIHK5S	TIHK5T	On-None-(Off)
TIHL50	TIHL51	TIHL54	TIHL55	On-None-On
TIHL5A	TIHL5B	TIHL5E	TIHL5F	On-None-(On)
TIHM50	TIHM51	TIHM54	TIHM55	On-Off-On
TIHM5A	TIHM5B	TIHM5E	TIHM5F	On-Off-(On)
TIHM5L	TIHM5M	TIHM5S	TIHM5T	(On)-Off-(On)

VDE APPROVED**10A 250VAC, 15A 125VAC, 12(6)A 250VAC T85****Single Pole in Double Pole base ²**

solder lug	.250 tab	wire lead	
TIGA90	TIGA91	TIGA95	On-None-Off
TIGB90	TIGB91	TIGB95	On-None-On
TIGC90	TIGC91	TIGC95	On-Off-On

Double Pole

solder lug	.250 tab	screw term.	wire leads
TIGK50	TIGK51	TIGK54	TIGK55
TIGK5A	TIGK5B	TIGK5E	TIGK5F
TIGK5L	TIGK5M	TIGK5S	TIGK5T
TIGL50	TIGL51	TIGL54	TIGL55
TIGL5A	TIGL5B	TIGL5E	TIGL5F
TIGM50	TIGM51	TIGM54	TIGM55
TIGM5A	TIGM5B	TIGM5E	TIGM5F
TIGM5L	TIGM5M	TIGM5S	TIGM5T

Four Pole

solder lug	.250 tab	screw term.	wire leads
TIHK50	TIHK51	TIHK54	TIHK55
TIHK5A	TIHK5B	TIHK5E	TIHK5F
TIHK5L	TIHK5M	TIHK5S	TIHK5T
TIHL50	TIHL51	TIHL54	TIHL55
TIHL5A	TIHL5B	TIHL5E	TIHL5F
TIHM50	TIHM51	TIHM54	TIHM55
TIHM5A	TIHM5B	TIHM5E	TIHM5F
TIHM5L	TIHM5M	TIHM5S	TIHM5T

Double Pole

solder lug	.250 tab	wire lead
TIGK90	TIGK91	TIGK95
TIGL90	TIGL91	TIGL95
TIGM90	TIGM91	TIGM95

Additional ratings up to 20A 125-277VAC, 1 1/2HP 125 VAC, 2HP 250VAC are available.
Consult factory for specifics.**2 ACTUATOR STYLE**

1S	Angular/Smooth Face Gloss ¹²	6M	Curved/Smooth Face Matte ³
1C	Angular/Cross Serrations Gloss ¹²	6S	Curved/Smooth Face Gloss ³
1F	Flatted/Smooth Face Gloss ¹²	7S	Rounded Paddle/Smooth Face Gloss ¹
1L	Angular/Longline Serrations Gloss ^{1,12}	7N	Witch's Hat/Narrow ¹⁴
2L	Long Smooth/Narrow ¹⁴	7P	Witch's Hat/Wide ¹⁴

3 ACTUATOR COLOR ⁹

BL Black WH White RD Red

4 BRACKET STYLE ⁹

A	Screw Mount ⁵
B	Screw Mount ^{5,12}
C	Screw Mount ⁵
H	Screw Mount ⁵
NBL	Nylon Black
WBL	Water shedding Black ⁴
MBL	Marine Style Black ^{4,6}
FN	Metal Snap-In ⁵
FN BLK	Black Metal Snap-In ⁵
FN SS	Stainless Steel Snap-In ⁵
FW	Wide Stainless Steel Snap-In ⁵

Notes:

- 1 NBL, FN, & FW brackets only.
- 2 For single pole switch in a single pole base, specify TIL with single pole circuitry/rating/termination.
- 3 NBL, WBL, & MBL brackets only. With 6M actuator, brackets also will be matte finish.
- 4 6M & 6S actuators only
- 5 Not available with 6M & 6S actuators.
- 6 Consists of WBL bracket, neoprene seal, and dummy rivets at open holes. Consult factory for agency approval status.
- 7 All ratings are appropriate for usage in low voltage applications.
- 8 For additional special circuits, see catalog.
- 9 Custom colors are available, consult factory.
- 10 .187 tab and PC terminations are also available. Consult factory for catalog number callout.
- 11 () momentary
- 12 Not available with WBL or MBL style brackets.
- 13 Available with bracket A, C or H only.
- 14 Not available with MBL, WBL or H brackets. Can be supplied as a double rocker to control separate poles of a TIG, TH or TIL switch. Consult factory for details.

LTILA51 - 6M - BL - RC - MBL - 12V

¹
Base Part Number²
Actuator Style³
Actuator Color⁴
Lens Color⁵
Bracket⁶
Lamp Voltage**1 BASE PART NUMBER: SERIES / POLES / ILLUMINATION / CIRCUITRY ¹² / RATING ¹⁰ / TERMINATION ¹⁴****10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 15-28VDC****illuminated Single Pole in Double Pole base**

solder lug	.250 tab	screw term.	wire leads	
LTILA50	LTILA51	LTILA54	LTILA55	On-None-Off
LTILA5A	LTILA5B	LTILA5E	LTILA5F	(On)-None-Off
LTILA5L	LTILA5M	LTILA5S	LTILA5T	On-None-(Off)
LTILB50	LTILB51	LTILB54	LTILB55	On-None-On
LTILB5A	LTILB5B	LTILB5E	LTILB5F	On-None-(On)
LTILC50	LTILC51	LTILC54	LTILC55	On-Off-On
LTILC5A	LTILC5B	LTILC5E	LTILC5F	On-Off-(On)
LTILC5L	LTILC5M	LTILC5S	LTILC5T	(On)-Off-(On)

illuminated Double Pole

solder lug	.250 tab	screw term.	wire leads
LTIGK50	LTIGK51	LTIGK54	LTIGK55
LTIGK5A	LTIGK5B	LTIGK5E	LTIGK5F
LTIGK5L	LTIGK5M	LTIGK5S	LTIGK5T
LTIGL50	LTIGL51	LTIGL54	LTIGL55
LTIGL5A	LTIGL5B	LTIGL5E	LTIGL5F
LTIGM50	LTIGM51	LTIGM54	LTIGM55
LTIGM5A	LTIGM5B	LTIGM5E	LTIGM5F
LTIGM5L	LTIGM5M	LTIGM5S	LTIGM5T

Additional ratings up to 12A 250VAC, 17A 125 VAC, 3/4 HP 125 VAC, 1HP 250VAC are available.
Consult factory for specifics.

Three pole switch is also available: Substitute H for fourth digit of part number. ex. LTIHK51

2 ACTUATOR STYLE ⁴

1S	Angular/Smooth Face Gloss ¹
1C	Angular/Cross Serrations Gloss ¹
1L	Angular/Longline Serrations Gloss ¹
6M	Curved/Smooth Face Matte ³
6S	Curved/Smooth Face Gloss ³
7S	Rounded Paddle/Smooth Face Gloss ²

3 ACTUATOR COLOR ¹¹

BL Black WH White RD Red

4 LENS COLOR ¹³

AM	Amber	RC	Red	GN	Green ⁷
LU	Blue ⁷	CL	Clear	WH	White


5 BRACKET STYLE ¹¹


NBL	Nylon Black
WBL	Water shedding Black ⁵
MBL	Marine Style Black ^{5,8}
FN	Metal Snap-In ^{4,6}
FN BLK	Black Metal Snap-In ^{4,6}
FN SS	Stainless Steel Snap-In ^{4,6}

6 LAMP VOLTAGE**neon ⁹****125N** 125 volt **250N** 250 volt**incandescent****6V** 6 volt **12V** 12 volt **18V** 18 volt
24V 24 volt **28V** 28 volt**Notes:**

- 1 NBL, FN, & FW brackets only. Double pole circuits provided with 3 pole base.
- 2 LTIL-Series with NBL, FN, & FW brackets only.
- 3 NBL, WBL, & MBL brackets only. With 6M actuator, bracket will also be matte finish.
- 4 1S, 1C, 1L & 7S with NBL bracket only available with LTIL-Series.
- 5 6M, 6S actuators only.
- 6 Not available with 6M and 6S actuators.
- 7 Not recommended with neon lamps.
- 8 Consists of WBL bracket, neoprene seal, dummy rivets at open holes. Consult factory for agency approval status.
- 9 Not recommended with blue or green lenses.
- 10 All ratings are appropriate for usage in low voltage applications.
- 11 Custom colors and additional bracket styles are available, consult factory.
- 12 () - momentary
- 13 All double throw circuits supplied with two lenses. To specify two different lens colors, specify second color, after first color.
(ex. LTIGM51-6S-BL-RC/GN-WBL-12V)
- 14 .187 tab and PC terminations are also available. Consult factory for catalog number callout.

Dimensional Specifications: in. [mm]

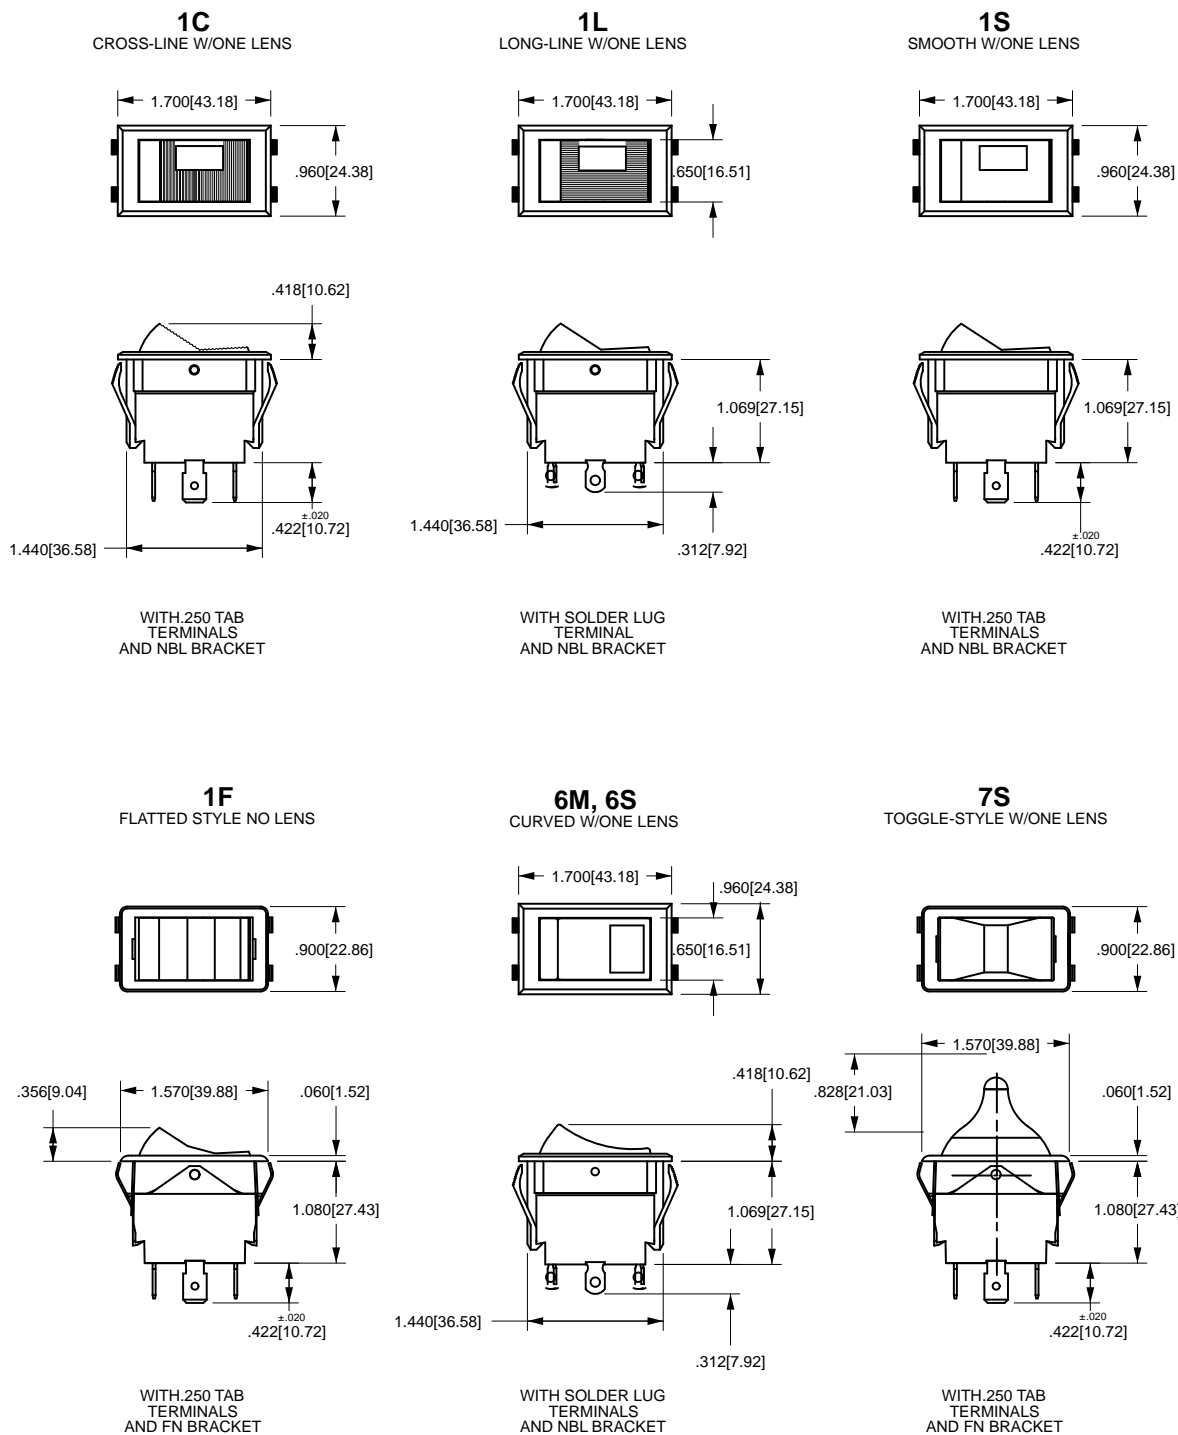


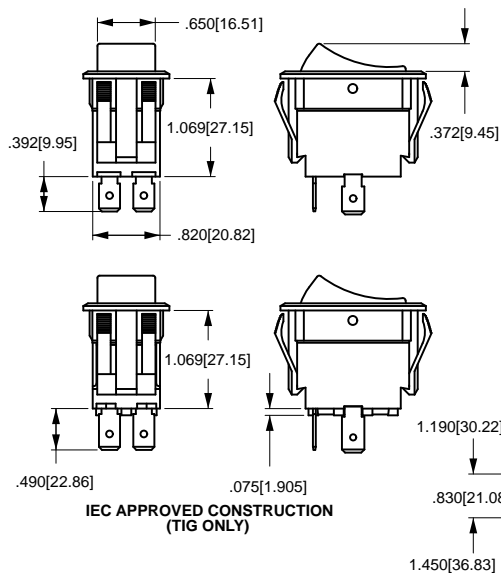

SOLDER LUG	.250 TAB (Q.C.)	.187 TAB (Q.C.)
TERMINAL TYPE		
SCREW (ASSEMBLED)	WIRE LEAD	PRINTED CIRCUIT

MOUNTING HOLE
(Nylon Snap-in Brackets)
Panel Thickness:
.030 min. - .250 max.
Switch should be mounted at 90°
for maximum water shedding
(45° to 90° acceptable)

* Angled corners are suggested for optimum fit. Standard rectangular cutout is acceptable.

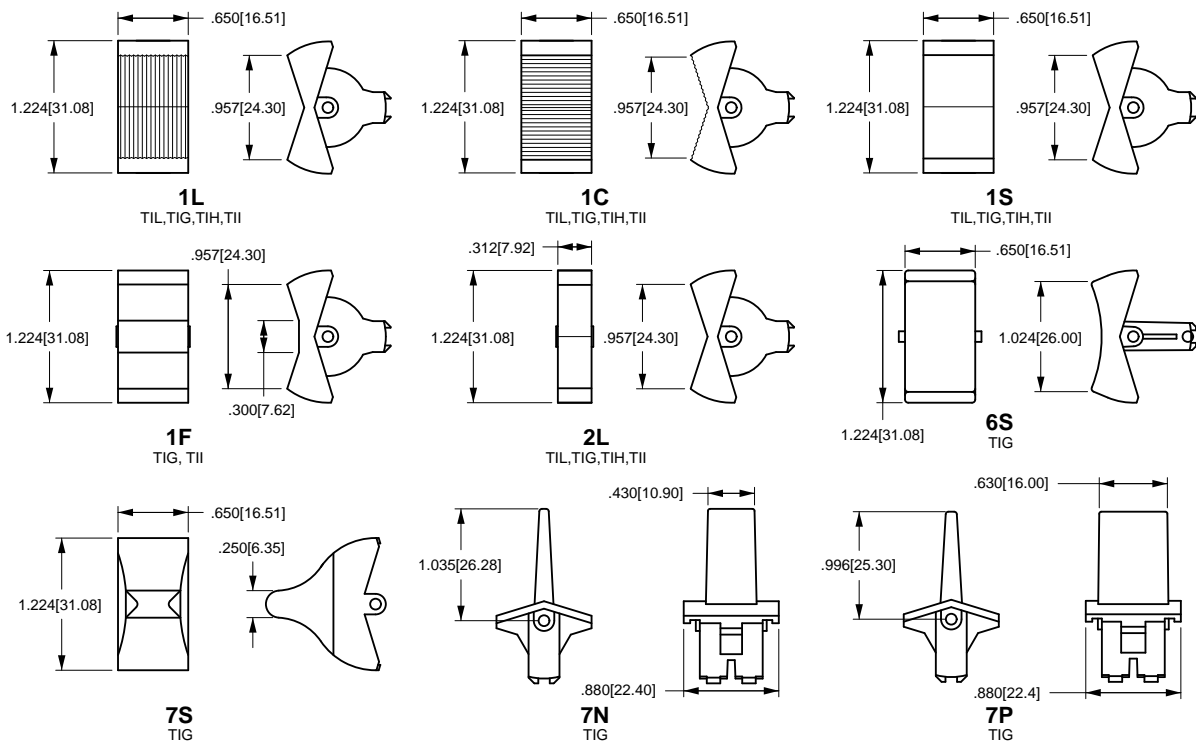


SPECIAL CIRCUITS FOR TIPPETTE ROCKER SWITCHES


Circuit	Position 1	Position 2	Position 3
Progressive Two Circuit			
GG	BOTH CIRCUITS ON	ONE CIRCUIT ON	OFF
GG	BOTH CIRCUITS (ON)	ONE CIRCUIT ON	OFF
Single Pole Triple Throw			
GE	ON	ON	ON
Two Circuit			
GH	CIRCUIT 1 ON	BOTH CIRCUITS ON	CIRCUIT 2 ON
GP	CIRCUIT 2 ON	CIRCUIT 1 ON	OFF
Reversing Double Pole	Double Throw		
GO	ON	OFF	ON
GX	ON	NONE	ON

() Indicates momentary function.


Dimensional Specifications: in. [mm]



TAPPED HOLE
Standard with
A & B Brackets






CLEARANCE HOLE
Standard with
C Bracket



MOUNTING HOLE

(Nylon Snap-in Brackets)
Panel Thickness:
.030 min. - .250 max.
* Angled corners are suggested for
optimum fit. Standard rectangular
cutout is acceptable.

TIL	TIG	TII	TIH



LS-Series

ROCKER SWITCHES

The LS-Series Softspot illuminated rocker switches feature a three-color high brightness light sequence, from a single lamp. These switches are designed with a standard nylon snap-in bracket and “Drip-Dry” construction that protects the front panel from dust and moisture.



Product Highlights:

- ♦ Water Resistant Construction
- ♦ Independent or Dependent Illumination
- ♦ Up to 3 Different Colors Under a Single Lens
- ♦ Multiple Termination Options

Typical Applications:

- ♦ Marine
- ♦ Transportation



Dielectric Strength

1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained

25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

LS1511 - 13 - BL - BL - 012

1
Base Part Number

2
Lighting
Sequence

3
Actuator
Color

4
Base Color

5
Lamp Voltage

1 BASE PART NUMBER: SERIES / POLES / ILLUMINATION / CIRCUITRY / RATING / TERMINATION³

10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 15-28VDC

Single Pole	Solder Lug	.250 Tab QC	Screw Terms	Wire Leads
On-None-Off	LS1510	LS1511	LS1514	LS1515
On-None-(Off)	LS1520	LS1521	LS1524	LS1525
(On)-None-Off	LS1530	LS1531	LS1534	LS1535
On-None-On	LS1540	LS1541	LS1544	LS1545
On-None-(On)	LS1550	LS1551	LS1554	LS1555
On-Off-On	LS1560	LS1561	LS1564	LS1565
On--Off-(On)	LS1570	LS1571	LS1574	LS1575
(On)-Off-(On)	LS1580	LS1581	LS1584	LS1585

2 LIGHTING SEQUENCE^{1,2}

	position 1	position 2	position 3
01	red	red	red
02	amber	amber	amber
03	green	green	green
10	red	---	none
11	red	clear	red
12	red	clear	amber
13	red	clear	green
14	red	clear	blue
15	red	clear	clear
20	amber	---	none
21	amber	clear	red
22	amber	clear	amber
23	amber	clear	green
24	amber	clear	blue
25	amber	clear	clear
30	green	---	none
31	green	clear	red
32	green	clear	amber
33	green	clear	green
34	green	clear	blue
35	green	clear	clear
40	blue	---	none
41	blue	clear	red
42	blue	clear	amber
43	blue	clear	green
44	blue	clear	blue
45	blue	clear	clear
50	clear	---	none
51	clear	clear	red
52	clear	clear	amber
53	clear	clear	green
54	clear	clear	blue
55	clear	clear	clear

3 ACTUATOR COLOR⁴

BL Black
WH White

4 BASE COLOR⁴

BL Black
WH White

5 LAMP VOLTAGE²

incandescent

6V 6 volt

12V 12 volt

18V 18 volt

24V 24 volt

28V 28 volt


neon

125N 125 volt neon

250N 250 volt neon

Notes:

- Independent lamp is standard. Dependent lamp with ON-OFF function (including momentary) is available with Lighting Sequences 10, 20, 30, 40 and 50. (No light in OFF position.)
- Green and blue not recommended with 125 volt or 250 volt neon lamps.
- Additional terminations available. Consult factory.
- Custom colors available. Consult factory.
- () Indicates momentary function.

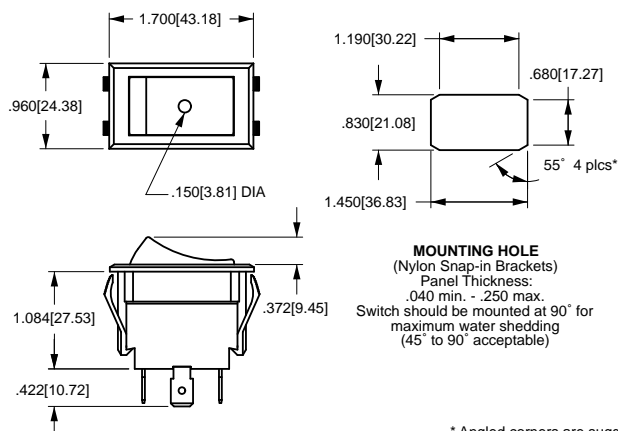

.125[3.18] DIA SOLDER LUG	.075[1.91] DIA .437[11.09] .250[6.35] .250 TAB (Q.C.)	.055[1.40] DIA .394[10.00] .187[4.74] .187 TAB (Q.C.)
TERMINAL TYPE		
#6-32NC-2 THREAD .370[9.39] .286[7.26] SCREW (ASSEMBLED)	6.000[152.40] .500[12.70] WIRE LEAD	.187[4.75] .187[4.75] .350[8.89] PRINTED CIRCUIT

* Angled corners are suggested for optimum fit.
Standard rectangular cutout is acceptable.

S-Series

ROCKER SWITCHES

S-Series rocker switches are designed for use in the enclosed cabs of today's trucks, with special focus afforded to the vehicle operator. With features including abbreviated travel $\frac{1}{2}$ throw actuation, ergonomic rockers, illumination in up to three detent switch positions, and a non-teasable snap action circuit, these switches provide the driver with easily recognizable and simple to operate controls. Designers will appreciate the 10A, 24VDC rating, space saving compact envelope, clean bezel-less design, integrated low insertion force connector and polarized switch base for quick installation. Most any illumination and switch circuitry is easily accommodated with the S-Series 10 terminal base.



Product Highlights:

- ♦ Abbreviated travel $\frac{1}{2}$ throw actuation
- ♦ Ergonomic rockers
- ♦ Recognizable and simple to operate controls
- ♦ Compact Design

Typical Applications:

- ♦ On-Highway Transportation Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment
- ♦ Marine



Electrical

Contact Rating	10A@ 24VDC
Dielectric Strength	1500 Volts RMS between pole to pole
Insulation Resistance	50 Megaohms
Contact Resistance	10 milliohms max. @ 4VDC
Contact Bounce	<20 milliseconds
Life	100,000 cycles maintained circuit, 50,000 cycles momentary circuit at rated voltage and current gold plated
Circuitry	SP, DP 2 & 3 position, 1/2 or full throw
Terminals	.110 Tabs, Silver Plated Brass

Mechanical

Endurance	250,000 cycles minimum
-----------	------------------------

Physical

Lighted	LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC.)
Bracket	Acetal
Base	Nylon 66 GF
Rocker	Polycarbonate
Weight	25 gms max.

Connector

Amp/Tyco MCP 2.8 receptacle housing P/N 1418994-1 mates with Amp/Tyco MCP 2.8 flat type receptacle. Based on wire size, choose P/N below:

1-968880-1	20-24 awg wire
1-968849-1	17-20 awg wire
1-968851-1	13.5-17 awg wire

Actuator Travel (Angular Displacement)

2 position (1/2 throw)	12°
3 position (full throw)	12° from center

Environmental

Operating Temperature	-40°C to +85°C
Vibration	Per IEC 68-2.6 test Fc and 68-2.47 Test Criteria - no noise or contact chatter below 10ms.
Cold Test	Per IEC 68-2-1 -40°C for 72 hours Test Criteria - pre & post test contact resistance.
Dry Heat Test Criteria	Per IEC 68-2-2 + 85°C for 72 hours Test Criteria - no loss of circuit during test, pre & post test contact resistance.
Handling Shock	Drop from height of 1 meter, 3 times, 4 sides. Test criteria - No loss of circuit during test, pre & post test contact resistance.
Thermal Shock	Per IEC 68-2-14, -40°C to +85°C. Test criteria - pre & post test contact resistance.

Mounting Specifications

Snap in Mount	40mm x 20mm keyed hole (see dimensional specifications for details.)
---------------	--

S	18	A	A	R	F	0	4	-	M	Z	Z	Z	00	-	1	00	00
1 Series	2 Circuit	3 Rating	4 Illumination	5 Lamp 1	6 Lamp 2	7 Lamp 3	8 Bracket Color		9 Actuator Color	10 Legend Color 1	11 Legend Color 2	12 Legend Color 3	13 Legend 1		14 Legend Orientation	15 Legend 2	16 Legend 3

1 SERIES S

2 CIRCUIT

Terminal Connections as viewed
from bottom of switch:

1 -- 2

3, 5 & 7.

3 -- 4

3, 5, 7 & 4, 6, 8.

5 -- 6

7 -- 8

9 -- 10

Position:

SP DP

16 26

18 28

SPECIAL CIRCUITS

31

41 51

42 52

43 53

44 54

45 55

46 56

47 57

75

98²

1

5 & 7, 6 & 8

ON

(ON)

(6 & 8)

ON

(ON)

(ON)

ON

(ON)

NONE

NONE

(5 & 7, 3 & 6)

(5 & 7, 2 & 6)

() - momentary

SP - single pole uses terminals

DP - double pole uses terminals

2

Connected Terminals

OFF

OFF

4, 5, 6, 7

OFF

OFF

3 & 5

3 & 5

OFF

5 & 7

5 & 7

5 & 7, 4 & 6

5 & 7, 4 & 6

3

3 & 5, 4 & 6

ON

(ON)

OFF

NONE¹

NONE¹

NONE¹

NONE¹

ON

ON

(ON)

(3 & 5, 4 & 6)

(5 & 9, 4 & 6)

5,6,7 LAMP (SAME CODING FOR ALL 3 SELECTIONS)

Selection 5: specifies lamp 1 located above terminals 1 (+) & 2 (-).

Selection 6: specifies lamp 2 located in center of rocker.

Selection 7: specifies lamp 3 located above terminals 9 (+) & 10 (-).

No lamp

LED

12VDC

24VDC

Red

A

B

Orange

C

D

Yellow

E

F

Green

H

J

8 BRACKET COLOR

1 Black

4 Dark Carbon

9 ACTUATOR

Standard Rocker, Laser Etched

Black

M

Titan Gray

N

Dark Carbon

R

10, 11, 12 LEGEND COLOR

Z No Legend

1 Clear

13 LEGEND 1⁵

00 No Legend

14 LEGEND ORIENTATION

0 No legend

1 Orientation 1

2 Orientation 2

3 Orientation 3

4 Orientation 4



15,16 LEGEND 2,3⁶

00 No legend

Notes:

1 Indicates 1/2 travel for actuator.

2 Snap-Action Contact Mechanism

3 Not available with circuit 98.

4 Available with circuit 98 only.

5 Located over T1-2.

6 Legend 2 located in center of rocker, Legend 3 located over T9-10.

Legend 2 options are limited due to a very small marking area.

Consult factory for specifics.

3 RATING

1 0.4VA 28VDC Resistive

A³ 10.5mA 1.5A 28VDC,

5A 28V 50A Inrush Lamp Load

B⁴ 3.5A 28VDC, 18A Inrush



C³ 10mA 10A 28VDC

D³ 20mA 10A 14VDC




4 ILLUMINATION

	Lamps	Illumination Type	Lamp wired to Terminals
S	NONE	INDEPENDENT	-
A	1	INDEPENDENT	1 (+) 2 (-)
C	1	INDEPENDENT	1 (+) 2 (-)
	2	INDEPENDENT	9 (+) 2 (-)
D	1	INDEPENDENT	1 (+) 2 (-)
	2	INDEPENDENT	9 (+) 10 (-)
E	1 & 3	INDEPENDENT	1 (+) 2 (-)
		PARALLEL	
F	1	INDEPENDENT	1 (+) 10 (-)
		SNAP	
G	1 & 2	INDEPENDENT	1 (+) 10 (-)
		DEPENDENT	9 (+) 2 (-)
H	1 & 2	INDEPENDENT	1 (+) 2 (-)
		DEPENDENT	9 (+) 10 (-)
J	1, 2 & 3	INDEPENDENT	1 (+) 2 (-)
		DEPENDENT	5 (+) 10 (-)
		INDEPENDENT	1 (+) 2 (-)
K	1 & 2	INDEPENDENT	1 (+) 2 (-)
		INDEPENDENT	9 (+) 10 (-)
		3.3K RESISTOR IN PARALLEL	

Dimensional Specifications: in. [mm]

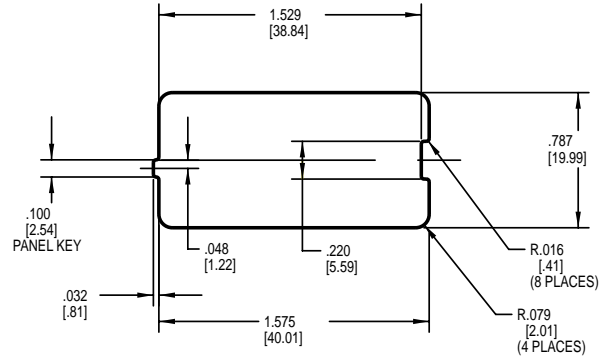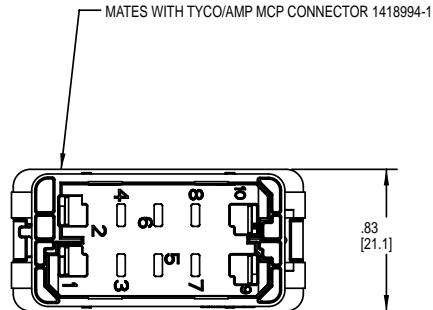


PANEL THICKNESS: 2.5±0.1mm
PANEL OPENING CLEARANCE: ±5°
SCALE 2.000

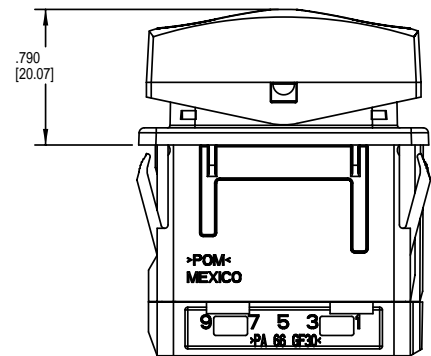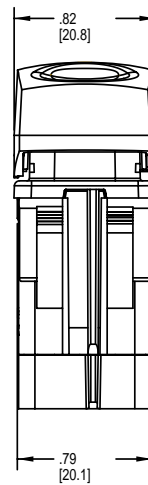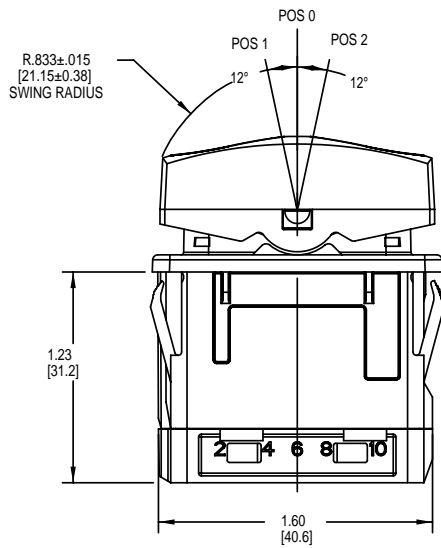

T-Series

SINGLE POLE ROCKER & PADDLE SWITCHES

The predecessor to the Curvette series whose versatility has allowed it to stand the test of time. Traditional styling coupled with self cleaning contacts, integrated wire leads, a multitude of circuits, ratings, and actuator choices has made the TA/LTA-Series appeal to a wide range of markets.

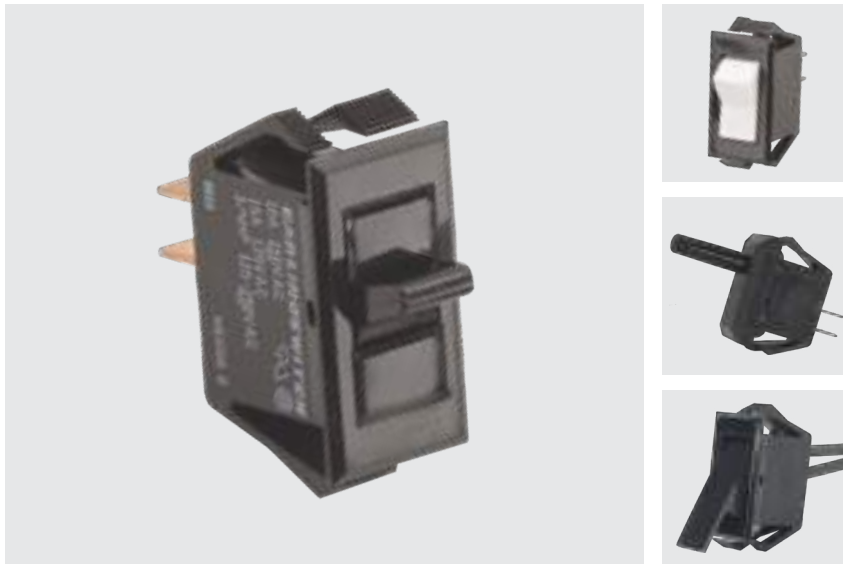

Product Highlights:

- ♦ Ratings Up To 20A
- ♦ Rocker, Paddle, Plunger or Door Interlock Actuators
- ♦ Integrated Wire Lead Construction
- ♦ Self-Cleaning Wiping Style Contacts

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts

Electrical Life

100,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

TA201 - **T** **B** - **B**

1 Base Part Number 2 Actuator Style 3 Actuator Color 4 Bezel Color/Style

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ⁴ / TERMINATION

10A 250 VAC, 15A 125 VAC, 3/4 HP 125-250 VAC
Solder Lugs .250 Tabs Wire Leads

Standard Base

ON-NONE-OFF	TA200	TA201	TA205
ON-NONE-ON	TB200	TB201	TB205
ON-OFF-ON	TC200	TC201	TC205

5A 250 VAC, 10A 125 VAC, 1/2 HP 125-250 VAC

(ON)-NONE-OFF	TA10A	TA10B	TA10F
ON-NONE-(OFF)	TA10L	TA10M	TA10T
ON-NONE-(ON)	TB10A	TB10B	TB10F

T-SERIES WITH PLUNGER ACTUATOR^{1,2}

10A 250 VAC, 16A 125 VAC, 1/2 HP 125-250 VAC		
OFF-NONE-(ON)	-	TA25B-PLB-B
ON-NONE-(OFF)	-	TA25T-PLB-B

T-SERIES WITH MOMENTARY ROCKER ACTUATOR

10A 250 VAC, 15A 125 VAC, 20A 125-250 VAC "H", 3/4 HP 125-250 VAC		
(ON)-NONE-OFF	-	TA22B-TLB-B
ON-NONE-(OFF)	-	TA22M-TLB-B

2 ACTUATOR STYLE

T Rocker	PS Short Paddle
P Paddle	

3 ACTUATOR COLOR ⁵

B Black	W White
----------------	----------------

4 BEZEL COLOR ⁵

B Black	W White
----------------	----------------

Notes:

Imprinting is available. Consult factory.

1 Optional plunger support option is available for applications requiring extensive lateral travel, consult factory for details.


2 Maintained circuit not available with TA22 and TA25 Series.

3 .187 tab terminals also available. Consult factory for catalog number callout.

4 Additional ratings are available. Consult factory.

5 Additional colors are available. Consult factory.

() Indicates momentary function.

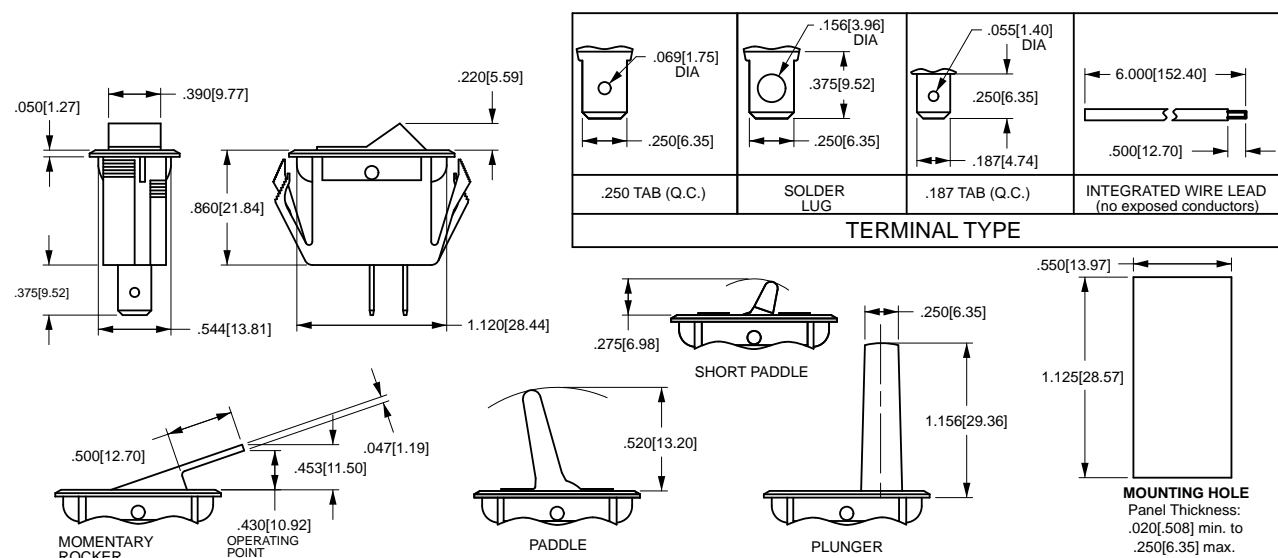

LTA-Series

SINGLE POLE LIGHTED ROCKER SWITCHES

The illuminated predecessor to the Curvette series whose versatility has allowed it to stand the test of time. Traditional styling coupled with self cleaning contacts, integrated wire leads, and various actuator choices has made the LTA-Series appeal to a wide range of markets.



Product Highlights:

- ♦ Neon or Incandescent Illumination
- ♦ Long Paddle, Short Paddle or Rocker Actuators
- ♦ Good for 125/250VAC or Low Voltage DC Applications
- ♦ Integrated Wire Lead Construction

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



TG/LTG

TG/LTG-Series ROCKER SWITCHES

The TG-Series Mid-Sized Tippette rocker switches are single or double pole and feature an all nylon double-insulated construction. These switches are designed with snap-in mounting for fast, low cost assembly. The illuminated version (LTG) is available with either a paddle or rocker actuator. These AC rated switches are also suitable for low-voltage DC applications assuring compatibility for a wide range of markets.



Product Highlights:

- ♦ Single or Double Pole
- ♦ Gloss Finish Surfaces
- ♦ Illuminated or Non-Illuminated
- ♦ 20 Available Circuit Options

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

LTG	G	O	50	1	-	T	B	-	B	-	R	/	125
1 Base Part Number	2 Circuit	3 Center Position	4 Rating	5 Termination	6 Actuator Style	7 Actuator Color	8 Base Color	9 Lens Color	10 Lamp Voltage				

1 BASE PART NUMBER: SERIES

TG Double Pole, Non-Lightened
LTG Double Pole with Indicator Lights

2 CIRCUIT 1

See Circuit Designation Chart

3 CENTER POSITION

C Center OFF, Three position
O No Center OFF, Two position

4 RATING

40 5A 250VAC, 10A 125VAC, 1/2HP 125-250VAC
41 5A 250VAC, 10A 125VAC
50 10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC
51 10A 250VAC, 15A 125VAC

5 TERMINATION / FUNCTION

	Solder Lug	.250 Tab QC	.187 Tab QC	Wire Leads
On-None-Off	0	1	3	5
(On)-None-Off	A	B	D	F
On-None-(Off)	L	M	R	T
On-None-On	0	1	3	5
On-None-(On)	A	B	D	F
On-Off-On	0	1	3	5

6 ACTUATOR STYLE

P Paddle **T** Rocker

7 ACTUATOR COLOR 2

B Black **W** White

8 BASE COLOR 2

B Black **W** White

9 LENS COLOR 3

A Amber **C** Clear **R** Red

10 LAMP VOLTAGE

incandescent		neon	
6V	6 volt	125N	125 volt neon
12V	12 volt	250N	250 volt neon
18V	18 volt		
24V	24 volt		
28V	28 volt		

Notes:

Imprinting is available. Consult factory.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.


1 TG available with circuits A, B, C, D, E, F; LTG available with circuits

G, H, I, J, M, N, P, Q, R, T, U, V, Y, Z.



2 Custom colors are available. Consult factory.

3 Specify lens color for LTG-Series only.

() Indicates momentary function.

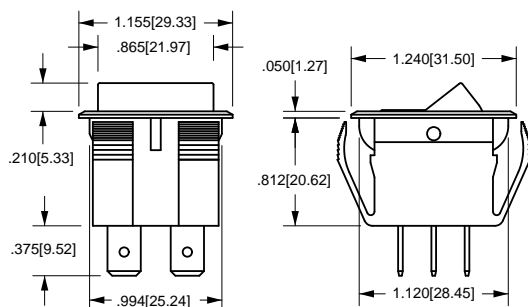

.250 TAB (Q.C.)	SOLDER LUG	.187 TAB (Q.C.)	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE			



Panel Thickness:
.030[.762] min. to
.250[6.35] max.

TTG-Series

ROCKER SWITCHES

The TTG-Series Mid-Sized Tippette snap-in rocker switches consist of two single pole illuminated or non-illuminated switches in a common base. Each pole can have the same or different switch function. These switches are AC rated up to 20 amps and are also suitable for low-voltage DC applications, in a wide range of markets.



Product Highlights:

- ♦ Independent or Dependent Illumination
- ♦ Ratings up to 20 Amps
- ♦ Diamond or Long Line Lens Options
- ♦ Self-Cleaning Wiping Style Contacts

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts

Electrical Life


50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

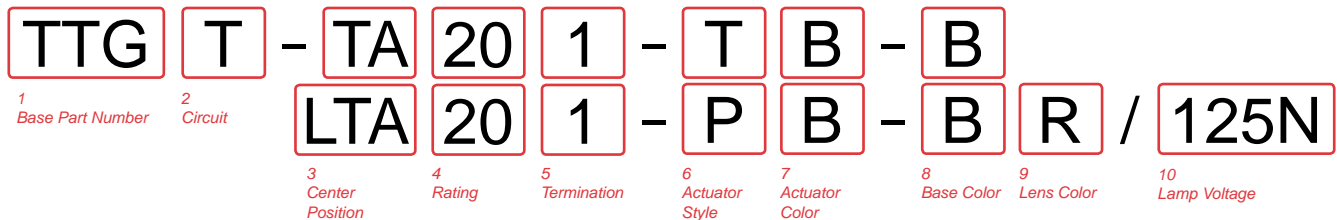

1 BASE PART NUMBER: SERIES
TTG Two Single Pole switches in one base

2 CIRCUIT ¹
See Circuit Designation Chart

3 BASIC SWITCH NUMBER
TA On-None-Off **TC** On-Off-On, Lighted
TB On-None-On **LTA** On-None-Off, Lighted

4 RATING
10 5A 250VAC, 10A 125VAC, 1/2HP 125-250VAC
11 5A 250VAC, 10A 125VAC, 5A 125VAC L
20 10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC
21 10A 250VAC, 15A 125VAC
22 10A 250VAC, 15A 125VAC, 20A 125-250VAC H, 3/4HP 125-250VAC

5 TERMINATION / FUNCTION

	Solder Lug	.250 Tab QC	.187 Tab QC	Wire Leads
On-None-Off	0	1	3	5
(On)-None-Off	A	B	D	F
On-None-(Off)	L	M	R	T
On-None-On	0	1	3	5
On-None-(On)	A	B	D	F
On-Off-On	0	1	3	5

6 ACTUATOR STYLE
P Paddle **PS** Short Paddle
T Rocker


7 ACTUATOR COLOR
unlighted²
B Black
W White
lighted³
A Amber
C Clear
G Green
LU Blue
R Red

8 BASE COLOR ²
B Black **W** White

9 LENS COLOR ⁴
A Amber **G** Green **R** Red
C Clear **LU** Blue **W** White

10 LAMP VOLTAGE
incandescent
6V 6 volt **neon**
125N 125 volt neon
250N 250 volt neon
12V 12 volt
18V 18 volt
24V 24 volt
28V 28 volt

Notes:
Imprinting is available. Consult factory.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 TG available with circuits A, B, C, D, E, F, L, T, U, G, H, I, J, M, N, P, Q, R, T, U, V, Y, Z.
2 Custom colors are available. Consult factory.
3 Specify lens color for LTA with rocker only.
4 Specify lens color for LTA with paddle actuators only.
() Indicates momentary function.

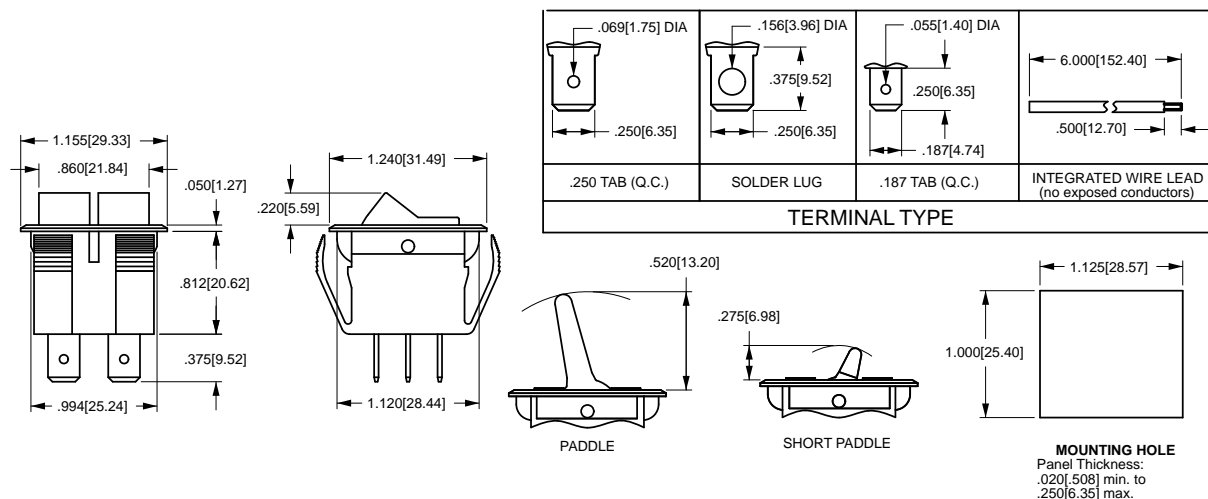

*Manufacturer reserves the right to change product specification without prior notice.

TLG-Series

ROCKER SWITCHES

The TLG-Series Mid-Sized Tippet snap-in rocker switches are single pole, rocker or paddle actuated with an adjacent indicator light. These single-actuator-switches are AC rated to 20 amps and are also suitable for low voltage DC applications.



Product Highlights:

- ♦ Maintained or Momentary Circuitry
- ♦ Rocker Paddle or mixed Rocker/Paddle actuators
- ♦ Illuminated or Non-Illuminated
- ♦ Integrated wire lead construction

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

TLG	G	-	D	R	-	TA	20	1	-	T	B	-	B		/	125N
1	2		3	4		5	6	7		8	9		10	11		12
Base Part Number	Circuit		Lens Design	Lens Color		Center Position	Rating	Termination		Actuator Style	Actuator Color		Base Color	Lens Color		Lamp Voltage

1 BASE PART NUMBER: SERIES

TLG Single Pole with adjacent Indicator Light

2 CIRCUIT ⁴

See Circuit Designation Chart.

3 LENS DESIGN

D Diamond
L Long Line

4 LENS COLOR

A Amber **G** Green **W** White
C Clear **R** Red

5 BASIC SWITCH NUMBER

TA On-None-Off **TC** On-Off-On
TB On-None-On **LTA** On-None-Off, Lighted

6 RATING

10 5A 250VAC, 10A 125VAC, 1/2HP 125-250VAC
11 5A 250VAC, 10A 125VAC, 5A 125VAC L
20 10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC
21 10A 250VAC, 15A 125VAC
22 10A 250VAC, 15A 125VAC, 20A 125-250VAC H, 3/4HP 125-250VAC

7 TERMINATION / FUNCTION

	Solder Lug	.250 Tab QC	.187 Tab QC	Wire Leads
On-None-Off	0	1	3	5
(On)-None-Off	A	B	D	F
On-None-(Off)	L	M	R	T
On-None-On	0	1	3	5
On-None-(On)	A	B	D	F
On-Off-On	0	1	3	5

8 ACTUATOR STYLE ²

P Paddle **PS** Short Paddle
T Rocker

9 ACTUATOR COLOR

unlighted ²
B Black **lighted**
W White **A** Amber
C Clear
G Green
LU Blue
R Red

10 BASE COLOR ²

B Black **W** White

9 LENS COLOR ^{1,3}

A Amber **G** Green **R** Red
C Clear **LU** Blue **W** White

10 LAMP VOLTAGE ¹

incandescent
6V 6 volt
12V 12 volt
18V 18 volt
24V 24 volt
28V 28 volt
neon
125N 125 volt neon
250N 250 volt neon

Notes:

Imprinting is available. Consult factory.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.


1 Neon Lamps not recommended with green or blue actuators and lenses.

2 Custom colors are available. Consult factory.


3 Specify lens color only if actuator is lighted paddle.

4 Available with circuits G, H, I, J, K only.


() Indicates momentary function.

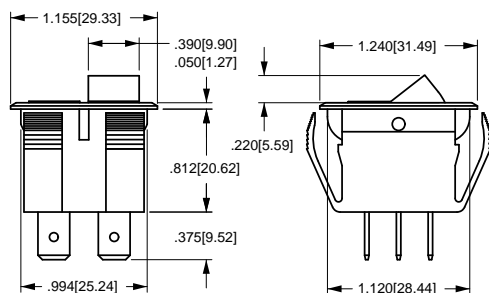

 .069[1.75] DIA .250[6.35] .250 TAB (Q.C.)	 .156[1.75] DIA .375[9.52] .250[6.35] SOLDER LUG	 .055[1.75] DIA .250[6.35] .187[4.74] .187 TAB (Q.C.)	 6.000[152.40] .500[12.70] INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE			

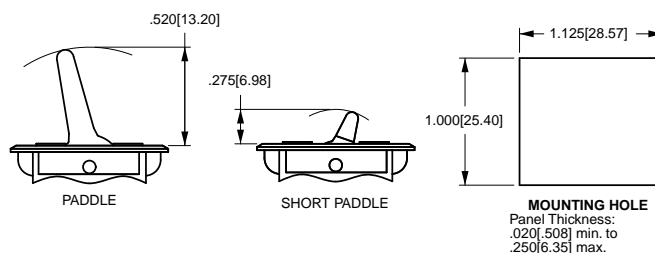

Circuit Designation Chart:

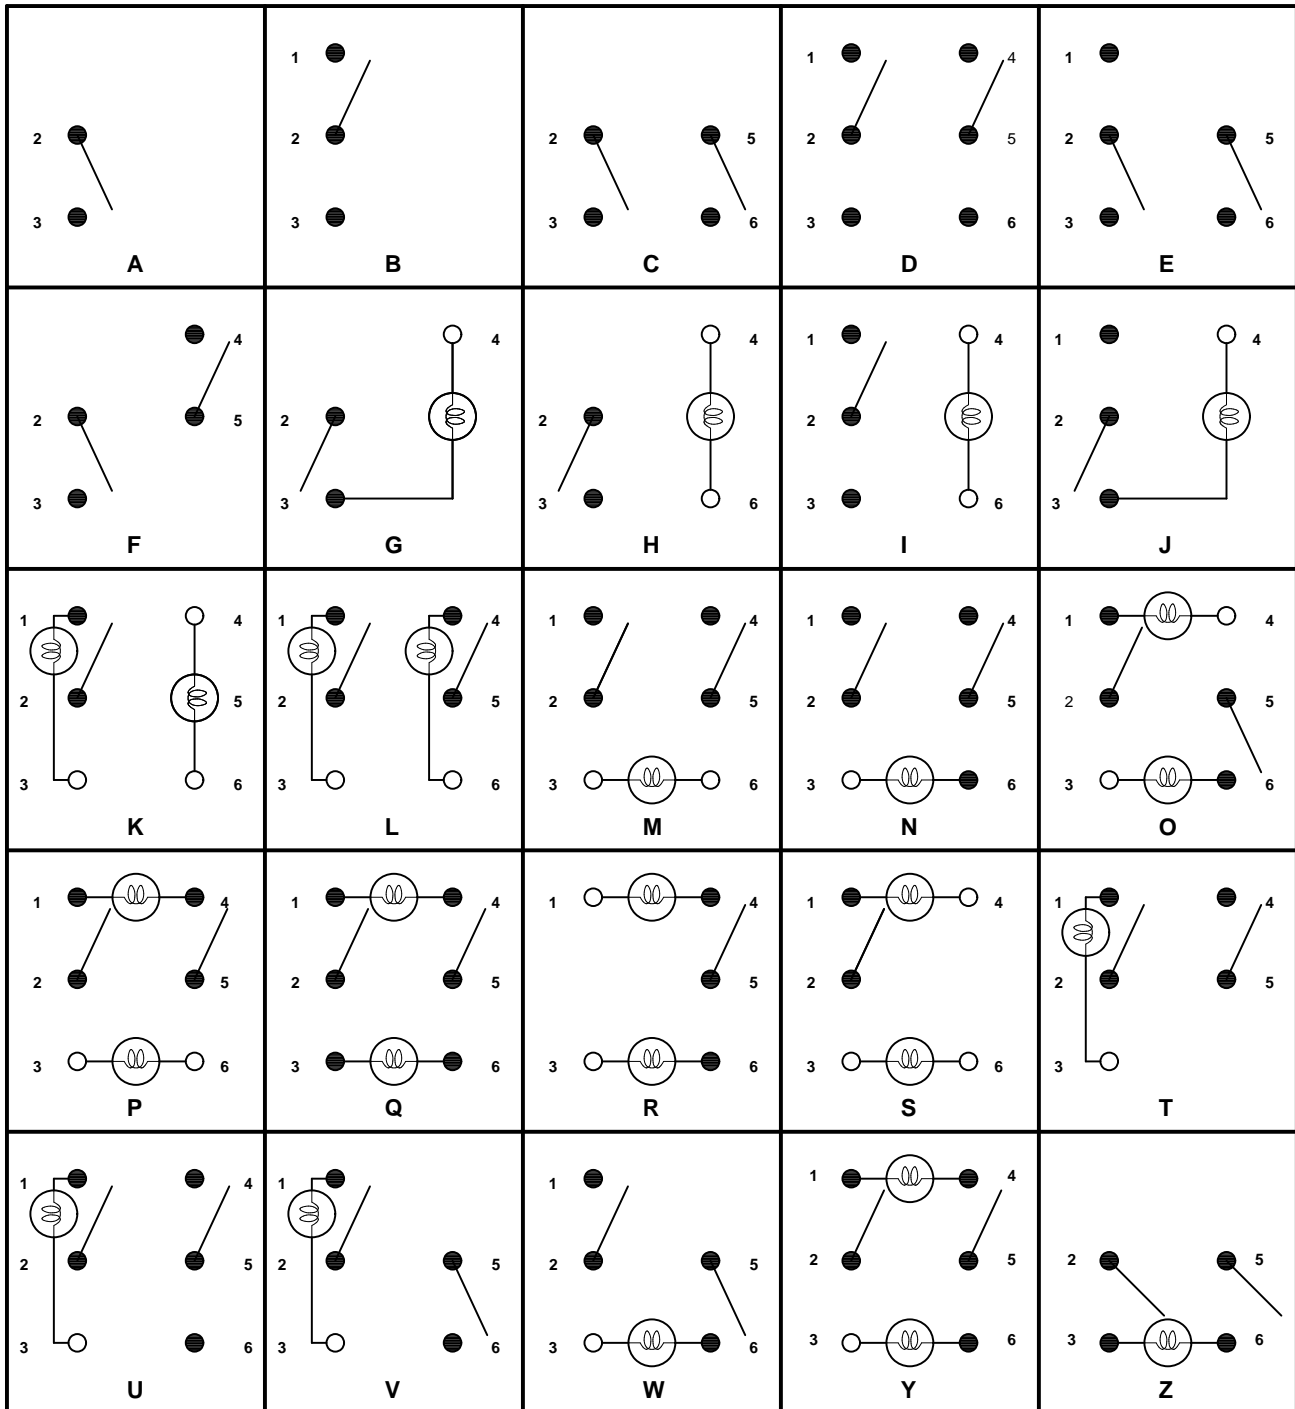

● CONTACT TERMINAL
Will make contact with switching lever

○ ISOLATED TERMINAL
Does not make contact with switching lever

● CONTACT TERMINAL AND SWITCH LEVER

○ BULB

RR/LRR

RR/LRR-Series

ROUNDED ROCKER SWITCHES

Carling Technologies' RR and LRR-Series round rocker switches feature a uniquely sculpted rocker design with electrical ratings of up to 12A 125VAC, 10A 250VAC and fit an industry standard cutout, making installation a snap. The lighted LRR-Series can be wired to accommodate dependent or independent, illumination, neon or incandescent lamps with red, green, amber or white translucent rockers. Standard or custom actuator legends are available.



Product Highlights:

- ♦ 125/250VAC or low voltage 12/24VDC
- ♦ Neon or Incandescent Illumination
- ♦ Industry Std. 20.2mm mounting hole
- ♦ Maintained or momentary circuitry

Typical Applications:

- ♦ Appliance
- ♦ Vacuum Cleaners
- ♦ Office Automation
- ♦ Food Service
- ♦ Audio Visual
- ♦ Test & Measurement



Dielectric Strength

UL/CUL:
1000V-live to dead metal parts
& opposite polarity

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

**1 SERIES**

RR Rocker

LRR Lighted Rocker

2 CIRCUIT

- 1 On-None-Off
- 2 (On)-None-Off
- 3 On-None-(Off)
- 4 On-None-On
- 5 On-None-(On)
- 6 On-Off-On

3 RATING

- 1¹ 10A, 125-250VAC; 12A 125 VAC
- 1/4 HP 125-250 VAC
- 3 6A, 28 VDC
- 4 12A, 12 VDC
- 5 12A, 6 VDC

4 TERMINATION

- 2 .187 Tab

5 ACTUATOR COLOR

RR-Series (Non-Illuminated) Solid Color

- B Black
- W White
- R Red

LRR-Series (Illuminated) Transparent Color

- 1 Amber
- 2 Red
- 3 Blue
- 4 Green
- 5 Clear

6 BASE COLOR

- B Black
- W White
- R Red

7 LAMP VOLTAGE

- N None
- A 6V Incandescent
- B 12V Incandescent
- C 28V Incandescent



- J² 125V Neon
- K² 250V Neon
- 1³ 6V LED
- 2³ 12V LED
- 3³ 24V LED

8 ROCKER FACE LEGEND


- N No imprinting
- A On-Off (vertical)
- B On-Off (horizontal)
- D I-O (horizontal)
- E I-O (vertical)
- F O (on rocker end)
- G II-O-I (vertical)
- H II-O-I (horizontal)
- J Off-On (vertical)
- K Off-On (horizontal)

Notes:

- 1 Rating Code "1" has UL and cUL approval.
- 2 Neon Lamps (125 or 250 Volts) not recommended with green or blue actuators.
- 3 LED illumination (6V, 12V or 24V) not recommended with blue or clear actuators.

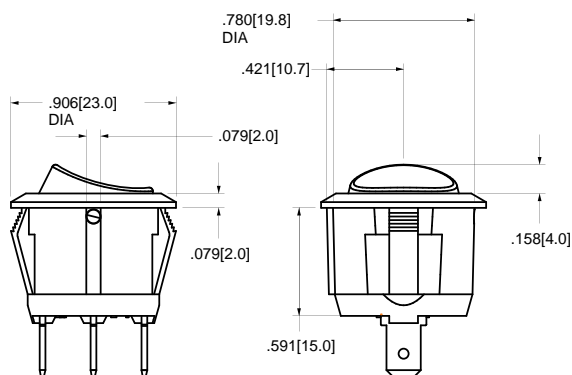

RECOMMENDED
PANEL
OPENING



CURVETTE

R/RSC-Series

SINGLE POLE ROCKER & PADDLE SWITCHES

Since its introduction, the Curvette switch has become the barometer for versatility and performance in the switch market. Self cleaning contacts, international approvals, along with a wide variety of circuits, ratings, and actuator options make the Curvette the switch of choice for many markets.



Product Highlights:

- ♦ Two color visi rocker to indicate “on” function
- ♦ Ratings to 20A
- ♦ Oval or rectangular bezels
- ♦ Patented mounting wings accommodate a wide range of panel openings

Typical Applications:

- ♦ Appliance
- ♦ HVAC
- ♦ Food Service
- ♦ Transportation



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts
VDE:
4000V - live to dead metal parts;
750V - across open contacts

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

Electrical Life

100,000 cycles

**1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION**

10A 250 VAC; 16A 125 VAC; 3/4 HP 125-250 VAC; 10(4) A 250 VACu T85

OFF-NONE-ON	Solder Lugs	.250 Tabs	Wire Leads
ON-NONE-ON	RA900	RA901	RA905
ON-OFF-ON ³	RB900	RB901	RB905
OFF-NONE-ON ²	RC910	RC911	RC915
	RD220	RD221	RD225

15A 250 VAC; 20A 125 VAC; 3/4 HP 125-250 VAC

OFF-NONE-ON	Solder Lugs	.250 Tabs
ON-NONE-ON	RSCA200	RSCA201
	RSCB200	RSCB201

4 BEZEL COLOR / STYLE**STANDARD**

B Black (matte)
W White (matte)

**OVAL**

1 Black (gloss)
2 White (gloss)

**5 ROCKER LEGEND**

	molded in	hot stamp
NO LEGEND	0	0
Off-On vertical	1	A
Off-On horizontal	2	B
I-O horizontal	8	D
I-O vertical	9	E
dual OFF-ON/I-O	n/a	H

2 ACTUATOR STYLE

M Momentary Rocker	R Rocker
P Paddle	V Visi-rocker (2 color)

3 ACTUATOR COLOR

1 Black (gloss)	B Black (matte)
2 White (gloss)	W White (matte)

6 VISI-ROCKER END / LEGEND COLOR

N N/A
B Black
V Visi-red
W White

Notes:


PC Terminals also available, consult factory for details.

¹ For additional ratings, consult factory.

² Rating is 8A 250 VAC, 12A 125 VAC, 1/2 HP 125-250 VAC, and must specify M actuator style.

³ Not rated at 3/4 HP 125-250 VAC

() indicates momentary function.

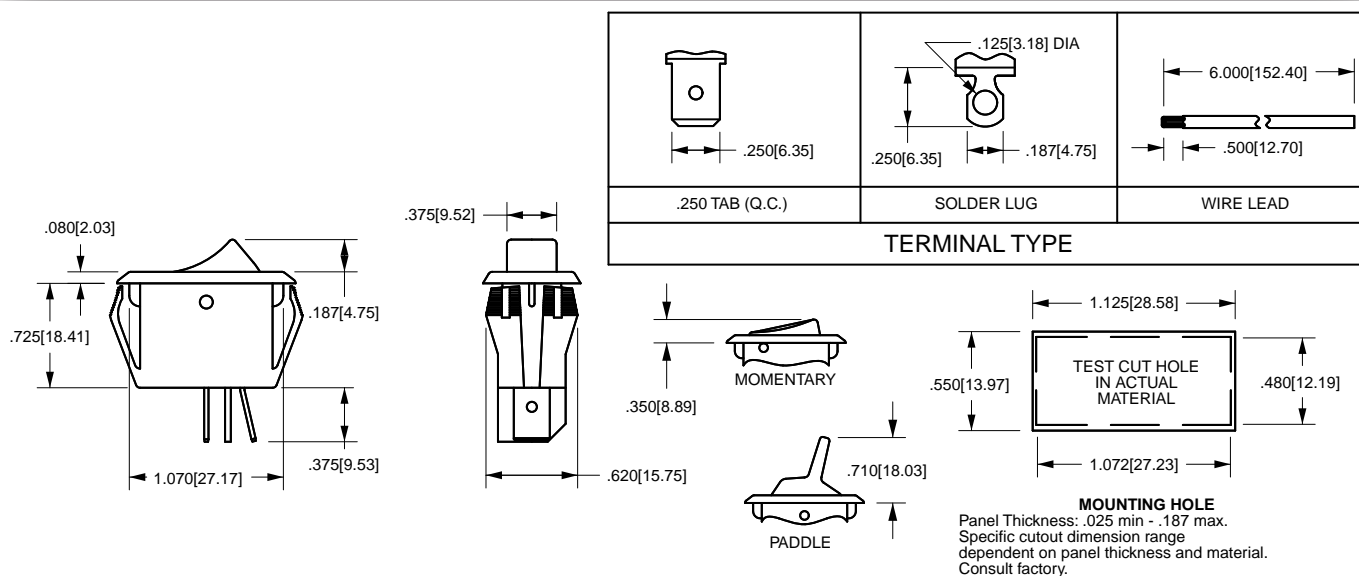

CURVETTE

LRA-Series

SINGLE POLE LIGHTED ROCKER & PADDLE SWITCHES

Since its introduction, the Curvette switch has become the barometer for versatility and performance in the miniature switch market. This lighted version features the very same self cleaning contacts, International approvals, along with a wide variety of circuits, ratings, and actuator options that make the Curvette the switch of choice for various applications.



Product Highlights:

- ♦ Clear or translucent style rockers
- ♦ Neon or Incandescent illumination
- ♦ Self-cleaning wiping style contacts
- ♦ UL, CSA and VDE approved

Typical Applications:

- ♦ HVAC
- ♦ Office Lighting
- ♦ Transportation
- ♦ Commercial Food
- ♦ Lawn & Garden
- ♦ Power Strip



Dielectric Strength

UL/CSA:
1000V-live to dead metal parts
VDE:
4000V - live to dead metal parts;
750V - across open contacts

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

Electrical Life

100,000 cycles

LRA911 - R S - B / 250N

¹
Base Part Number

²
Actuator
Style

³
Actuator
Color

⁴
Bezel
Color/Style

⁵
Lamp Voltage

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ² / TERMINATION

125 neon lamp (use 125N in Selection 5 Lamp Voltage)

10A 250VAC; 16A 125VAC; 10(4)A 125VACu

	Solder Lugs	.250 Tabs	Wire Leads
OFF-NONE-ON	LRA210	LRA211	LRA215

250 neon lamp (select 250N in selection 5 Lamp Voltage)

15A 250 VAC; 10A 250VAC; 16A 125VAC; 10(4)A 250 T85

	Solder Lugs	.250 Tabs	
OFF-NONE-ON	LRA910	LRA911	LRA915

Incandescent lamp (select 006V-024V in selection 5 Lamp Voltage)
10A 30V

	Solder Lugs	.250 Tabs	Wire Leads
OFF-NONE-ON	LRA510	LRA511	LRA515

2 ACTUATOR STYLE

P Paddle
R Rocker translucent
C Rocker Clear

3 ACTUATOR COLOR**translucent**

A Amber
C White
P Yellow
S Red
W Pale Red

clear

A Amber
C Clear
G¹ Green
B¹ Blue
R Red

4 BEZEL COLOR/STYLE**STANDARD**

B Black (matte)
W White (matte)

OVAL

1 Black (gloss)
2 White (gloss)


5 LAMP VOLTAGE

006V 6 volts incandescent
012V 12 volts incandescent
018V 18 volts incandescent
024V 24 volts incandescent
125N¹ 125 volts neon
250N¹ 250 volts neon


Notes:
LED illumination, PC terminals, independent lamps, and additional color options are available. Consult factory.

¹ Neon lamps not available with blue or green actuators.

² Consult factory for additional ratings.

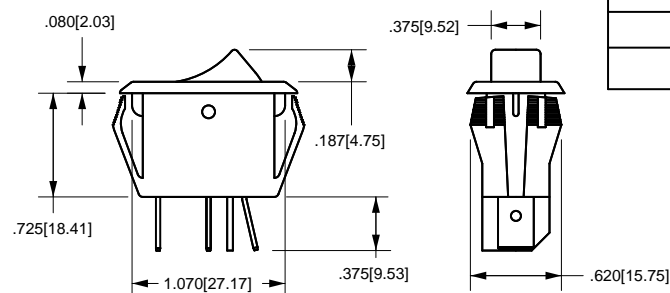

.250 TAB (Q.C.)	SOLDER LUG	WIRE LEAD
TERMINAL TYPE		

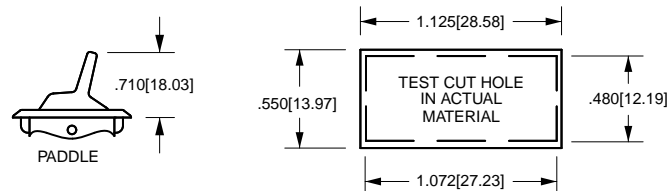**MOUNTING HOLE**

Panel Thickness: .025 min. - .187 max.
Specific cutout dimension range
dependent on panel thickness and material.
Consult factory.

RG-Series

SINGLE/DOUBLE POLE ROCKER & PADDLE SWITCHES

The double pole version of the R-Series incorporates the same sleek lines as the original Corvette, in a double pole envelope. Features include silver-plated butt-action contacts which afford ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Paddle or rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications.



Product Highlights:

- ♦ Ratings to 20A
- ♦ UL, CSA and VDE approved
- ♦ Rocker or Paddle actuators
- ♦ Fits Euro or American standard mounting holes

Typical Applications:

- ♦ Power Supply
- ♦ Appliance
- ♦ Exercise Equipment
- ♦ Music Equipment



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts &
opposite polarity
VDE:
4000V - live to dead metal parts;
1250V - opposite polarity &
across open contacts

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

-40°F to 185°F (-40°C to 85°C)

RGSCA901 - R - B - B - A

1
Base Part Number

2
Actuator
Style

3
Actuator
Color

4
Bezel Color

5
Rocker
Legend

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION

15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC, 14(6)A 250 VAC

Standard Base

	Solder Lugs	.250 Tabs	Wire Leads
OFF-NONE-ON (Single Pole)	RGSCA900	RGSCA901	RGSCA905
ON-NONE-ON (Single Pole)	RGSCB900	RGSCB901	RGSCB905
OFF-NONE-ON (Double Pole)	RGSCC900	RGSCC901	RGSCC905
ON-NONE-ON (Double Pole)	RGSCD900	RGSCD901	RGSCD905

European Base (22 x 30 mm cutout)

	Solder Lugs	.250 Tabs	Wire Leads
OFF-NONE-ON (Single Pole)	RGSEA900	RGSEA901	RGSEA905
ON-NONE-ON (Single Pole)	RGSEB900	RGSEB901	RGSEB905
OFF-NONE-ON (Double Pole)	RGSEC900	RGSEC901	RGSEC905
ON-NONE-ON (Double Pole)	RGSED900	RGSED901	RGSED905

2 ACTUATOR STYLE

P Paddle R Rocker

3 ACTUATOR COLOR ¹

B Black W White

4 BEZEL COLOR ¹




B Black W White

5 ROCKER LEGEND

	hot stamp
NO LEGEND	O
OFF-ON vertical	A
OFF-ON horizontal	B
I-O horizontal	D
I-O vertical	E
Dual OFF-ON, I-O vertical	H
Dual OFF-ON, I-O horizontal	J

Notes:

1 Additional ratings, colors and clear style actuators are available. Consult factory.

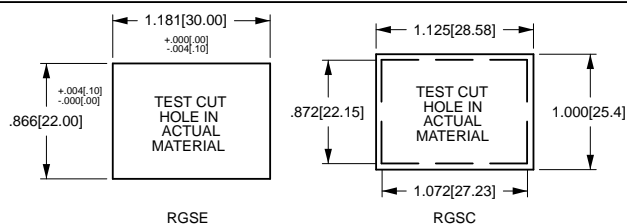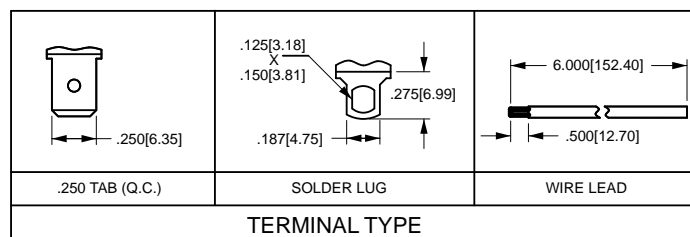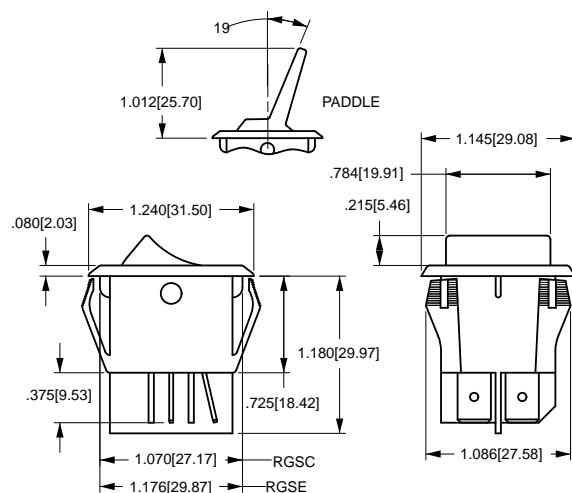

MOUNTING HOLE
Panel Thickness: .025 min - .187 max.
Specific cutout dimension range dependent
on panel thickness and material.

LRG-Series

ILLUMINATED DOUBLE POLE ROCKER & PADDLE SWITCHES

The double pole lighted version of the R-Series incorporates the same sleek lines as the original Corvette, in a double pole envelope. This illuminated version features silver-plated butt-action contacts with ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Clear or translucent style rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications.



Product Highlights:

- ♦ Ratings to 20A
- ♦ Neon or Incandescent Illumination
- ♦ Silver Plated Butt-contact mechanism
- ♦ Clear or translucent style rockers

Typical Applications:

- ♦ Power Supply
- ♦ Appliance
- ♦ Exercise Equipment
- ♦ Music Equipment



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts &
opposite polarity

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

-40°F to 185°F (-40°C to 85°C)

LRGSCK611 - **R** **S** - **B** - **B** / **250N**

1
Base Part Number

2
Actuator
Style

3
Actuator
Color

4
Bezel Color

5
Rocker
Legend

6
Lamp Voltage

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION

15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC

	Solder Lugs	.250 Tabs	Wire Leads
Standard Base			
OFF-NONE-ON	LRGSCK610	LRGSCK611	LRGSCK615
European Base (22 x 30 mm cutout)			
OFF-NONE-ON (Single Pole)	LRGSEK610	LRGSEK611	LRGSEK615
15A 6-24 V ³			
Standard Base			
OFF-NONE-ON	LRGSCK510	LRGSCK511	LRGSCK515
European Base (22 x 30 mm cutout)			
OFF-NONE-ON (Single Pole)	LRGSEK510	LRGSEK511	LRGSEK515

4 BEZEL COLOR ¹

B Black **W** White

5 ROCKER LEGEND

	hot stamp
NO LEGEND	O
OFF-ON vertical	A
OFF-ON horizontal	B
I-O horizontal	D
I-O vertical	E
Dual OFF-ON, I-O vertical	H
Dual OFF-ON, I-O horizontal	J

2 ACTUATOR STYLE

R Rocker (translucent) **C** Rocker (clear)

3 ACTUATOR COLOR




A Amber **L** ³ Lime Green
B ^{3,5} Blue **P** Yellow
C ⁴ White/Clear **R** Red (clear)
G ⁵ Green **S** Red
W Pale Red

6 LAMP VOLTAGE ²

006V 6V incandescent **024V** 24V incandescent
012V 12V incandescent **125N** 125V neon
018V 18V incandescent **250N** 250V neon

Notes:

- 1 Additional ratings, colors and clear style actuators are available. Consult factory.
- 2 Incandescent lamps must specify 15A 24V rating only.
- 3 Available with incandescent lamps only.
- 4 Clear color provided where specified with clear style rocker.
- 5 Available with clear style rocker only.

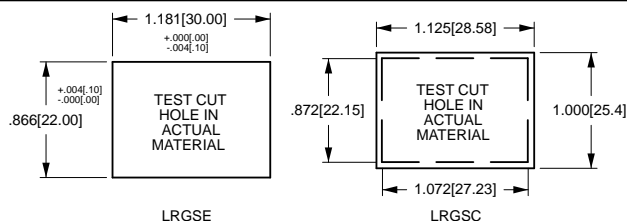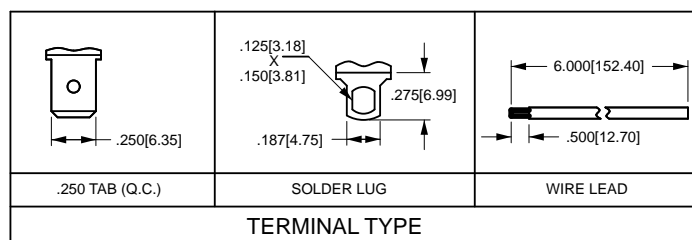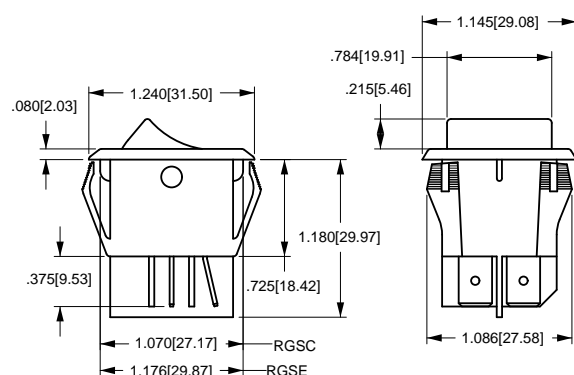


MOUNTING HOLE
 Panel Thickness: .025 min - .187 max.
 Specific cutout dimension range dependent on panel thickness and material.

610/620

610/620-Series

SMALL-SIZED ROCKER SWITCHES

The 610/620-Series switches are double insulated and available in single or double pole configurations. These snap-in mounted switches are offered with either a paddle or rocker actuator and with ratings up to 8 amps.



Product Highlights:

- ♦ Single or double pole
- ♦ Paddle rocker actuator options
- ♦ Snap-In mounting method

Typical Applications:

- ♦ Handheld Appliance
- ♦ Audio-Visual
- ♦ Power Supplies
- ♦ Computers



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts &
opposite polarity

Mechanical Life

100,000 cycles

Electrical Life

50,000 cycles- single pole
50,000 cycles- double pole

Operating Temperature

32°F to 185°F (0°C to 85°C)

62012421

¹
Base Part Number

- 0 - 0

²
Terminal
Sealing

³
Legend

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION ¹

**4A 250VAC; 8A 125VAC
Single Pole**

	Solder Lugs	PC Term
On-none-On	62011421	62011422
On-none-(On)	62011431	62011432
On-off-On	62011461	62011462
On-off-(On)	62011471	62011472
(On)-off-(On)	62011481	62011482
Double Pole		
On-none-On	62012421	62012422
On-none-(On)	62012431	62012432
On-off-On	62012461	62012462
On-off-(On)	62012471	62012472
(On)-off-(On)	62012481	62012482

2 TERMINAL SEALING

0 None
E Epoxy sealed terminals


3 LEGEND

NO LEGEND hot stamp
On-OFF vertical **0**
On-OFF horizontal **A**
I-O horizontal **B**
I-O vertical **D**
G



Notes:

¹ Base part number specifies black rocker and bezel. To specify paddle actuator, change 2nd digit of part number from 2 to 1 (ex. 61012421) For additional ratings and colors, consult factory.

() indicates momentary function.

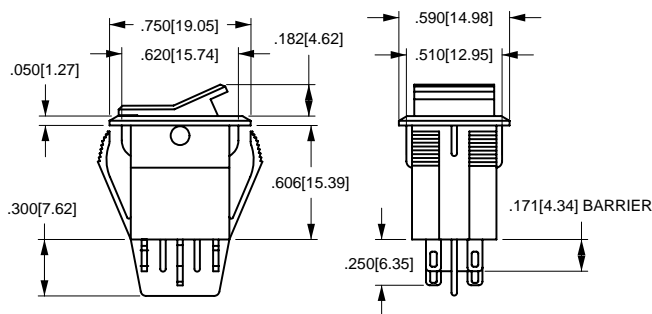

PC TERMINAL	.080 SOLDER LUG
TERMINAL TYPE	



611/621-Series

SMALL-SIZED ROCKER SWITCHES

The 611/621-Series small-size, sleek styling, actuator and termination choices make this switch a cost effective solution to most any switching need. International approvals, single or double pole circuitry, and ratings to 11A 125VAC further the broad appeal of this product family.



Product Highlights:

- ♦ Single or double pole
- ♦ Paddle and single color or dual color visi-rocker options
- ♦ UL, CSA and VDE approvals for select circuits
- ♦ Choice of 7 termination options

Typical Applications:

- ♦ Appliance
- ♦ Audio-Visual
- ♦ Power Supplies



Dielectric Strength

UL/CSA:
1000V - live to dead metal parts &
opposite polarity
VDE: 4000V - live to dead metal parts;
1250V - opposite polarity & across
open contacts

Electrical Life

50,000 cycles- single pole
50,000 cycles- double pole

Operating Temperature

32°F to 185°F (0°C to 85°C)

Mechanical Life

100,000 cycles

62116919 - 0 - 9 - V

¹
Base Part Number

²
Epoxy
Sealing

³
Rocker
Legend

⁴
Visi-Rocker
End Color

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ² / TERMINATION

	187 Tabs ⁴	.080 Solder Lugs	PC Terms	Wire Leads	PC Front Mount	PC Back Mount	.187 Solder Lugs
Single Pole; 4A 250VAC; 8A 125VAC; 6(4) A 250V ⁴							
ON-NONE-OFF	62116919	-	-	62111914	62111918 ⁶	62111917 ⁶	62111916
ON-NONE-ON	62116929	62116421	62111422	62111924	62111828 ⁶	62111927 ⁶	62111926
ON-OFF-ON ³	-	62111461	62111462	62111263 ⁷	-	-	-
ON-NONE-(ON) ³	-	62111431	62111432	62111233 ⁷	-	-	-
ON-OFF-(ON) ³	-	62111471	62111472	62111273 ⁷	-	-	-
(ON)-OFF-(ON) ³	-	62111481	62111482	62111283 ⁷	-	-	-
Double Pole; 4A 250VAC; 8A 125VAC; 6(4) A 250V ⁴							
ON-NONE-OFF	62115919	-	-	62112914	62112918 ⁶	62112917 ⁶	62112916
ON-NONE-ON	62115929	62115420	62112422	62112924	62112928 ⁶	62112927 ⁶	62112926
ON-OFF-ON ³	-	62112461	62112462	62112263 ⁷	-	-	-
ON-NONE-(ON) ³	-	62112431	62112432	62112233 ⁷	-	-	-
ON-OFF-(ON) ³	-	62112471	62112472	62112273 ⁷	-	-	-
(ON)-OFF-(ON) ³	-	62112481	62112482	62112283 ⁷	-	-	-

2 TERMINAL SEALING

0 None **E** Epoxy sealed terminals

Notes:


- Base part number specifies black rocker with black bezel. To specify paddle actuator change 2nd digit from 2 to 1. ex.: 61115919 = black paddle with black bezel. For additional ratings & colors, consult factory.
- Dry circuit rating is available, consult factory.
- Not available with 6(4) A 250 V rating or VDE approval.
- 6(4)A 250V VDE approved rating available with On-none-Off and On-none-On circuits only.
- Available with visi-rocker option only.
- Consult factory for PC footprint.
- Rated 2A 250VAC, 5A 125 VAC resistive.
- () Indicates momentary function.

3 ROCKER LEGEND

	molded in ⁵	hot stamp
NO LEGEND	0	0
Off-On vertical	n/a	A
Off-On horizontal	n/a	B
I-O horizontal	8	D
I-O vertical	9	E
O on rocker radius	n/a	F (Indicates ON)

4 VISI-ROCKER END COLOR

N	n/a
V	visi-red
W	visi-white

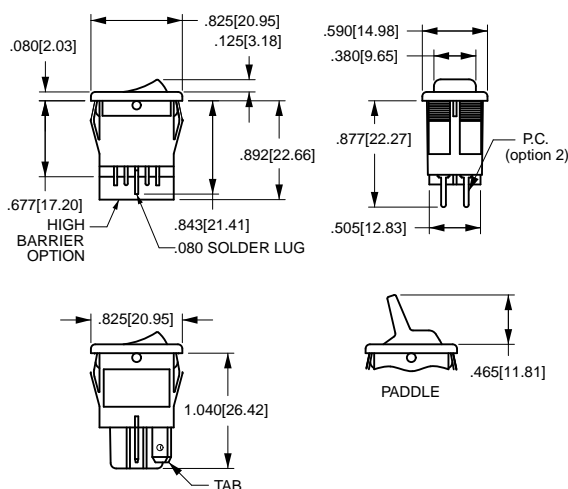

.171[4.34] END .080[2.03] X .047[1.19] SLOT	.250[6.35] CENTER	.062[1.57] DIA MIN .207[5.26] .046[1.17] .029[.736] .200[5.08] .185[4.70]
.080 SOLDER LUG (terminal option 1) functions 2,3,6,7,8		PC TERMINAL FRONT MOUNT & MOUNTING PATTERN (terminal option 2) functions 2,3,6,7,8
TERMINAL TYPE		
.187[4.74] X .032[.812] 187 TAB (Q.C.) (terminal option 9) functions 1,2	.120[3.05] DIA .315[8.00] 187 SOLDER LUG (terminal option 6) functions 1,2	6.000[152.40] .500[12.70] WIRE LEAD

PANEL THICKNESS	X	Y
.030[.762]-.060[1.52]	.508[12.90]	.756[19.20]
.060[1.52]-.093[2.36]	.508[12.90]	.764[19.40]
.093[2.36]-.156[3.96]	.508[12.90]	.780[19.81]

TEST CUT HOLE IN ACTUAL MATERIAL

622/632

622/623-Series

SMALL-SIZED ROCKER SWITCHES

A high powered offering packed into a small-sized envelope, the 622/632-Series is a staple of numerous markets. With its silver-alloy butt contacts, the 622/632 will handle inrush spikes up to 100 amps and steady state current to 12A 125VAC. The lighted 632-Series features a multitude of illumination circuit options available with LED, incandescent and neon style lamps.



Product Highlights:

- ♦ Illuminated or Non-Illuminated
- ♦ Silver Plated Butt contacts that handle high Inrush spikes
- ♦ Independent or Dependent lamp circuitry
- ♦ Industry standard size mounting hole

Typical Applications:

- ♦ Appliance
- ♦ Food Service
- ♦ Transportation
- ♦ General Purpose



Dielectric Strength

UL/CSA:
1000V-live to dead metal parts
& opposite polarity

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

632121 - 1 B - K N

1
Base Part Number

2
Actuator
Color

3
Base
Color

4
Lamp

5
Legend

BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION

8A 250VAC; 12A 125VAC; 1/2 HP 125-250VAC

622-SERIES NON-ILLUMINATED ROCKER

ON-none-OFF (Single Pole)
ON-none-OFF (Double Pole)

632-SERIES ILLUMINATED ROCKER

ON-none-OFF (Single Pole, dependent lamp) schematic 1
ON-none-OFF (Single Pole, independent lamp) schematic 3
ON-none-OFF (Single Pole, independent lamp unballasted) schematic 5
ON-none-OFF (Double Pole, dependent lamp with 5 terms.) schematic 2
ON-none-OFF (Double Pole, dependent lamp with 4 terms.) schematic 4

Solder Lugs

622121
622221

.187 Tabs

622122
622222

632121

632321

632521

632221

632421

632122

632322

632522

632222

632422

3 ACTUATOR COLOR ³

622 (non illuminated)

B Black
W White

632 (illuminated)

1 Clear Amber
2 Clear Red
3 Clear Blue ²
4 Clear Green
5 Clear

4 LAMP VOLTAGE / STYLE ¹

N 622 (non illuminated)
1 unballasted LED
2 6V LED
3 12V LED
4 24V LED

A 6V incandescent
C 12V incandescent
E 18V incandescent
H 24V incandescent
J 125V neon
K 250V neon

3 BASE COLOR ³

B Black

W White

5 ROCKER LEGEND

N NO Legend
A OFF-ON vertical
B OFF-ON horizontal
D I-O horizontal
E I-O vertical
F O on rocker radius



Notes:

1 For all incandescent or LED lamps specify 5 in 5th digit of part number.

Example 632151-1B-CN




2 Available with incandescent lamps only.

3 Additional colors available. Consult factory for details.

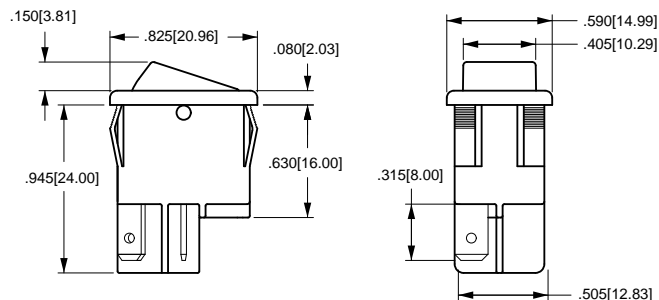

632 SCHEMATIC

UNBALLASTED

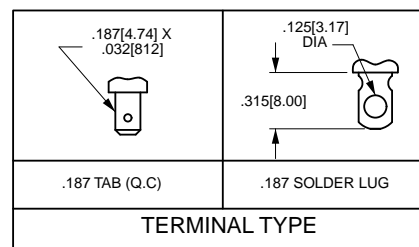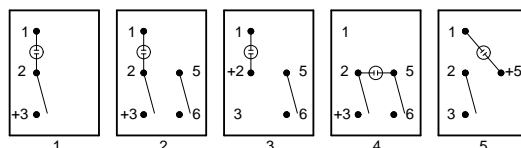

PANEL THICKNESS	A	B
.030[.76]-.050[1.27]	.508[12.90]	.756[19.20]
.050[1.27]-.078[1.98]	.508[12.90]	.764[19.40]
.078[1.98]-.125[3.17]	.508[12.90]	.780[19.81]

651/652

651/652-Series

SMALL-SIZED ROCKER SWITCHES

This switch is ideal for applications with back panel size constraints. It fits in a standard rectangular cutout and is designed to provide ease of insertion along with superior panel retention qualities. A high profile rocker and butt-action contacts provide the user with a crisp positive-type feel and electrical ratings to 12A 125VAC 10A 250VAC. A variety of ratings, circuitry and termination choices will appeal to many market segments.



Product Highlights:

- ♦ Ratings to 12A 125VAC, 6A 250VAC
- ♦ Suitable for low voltage 12/24V DC
- ♦ Solid or 2 color visi-rocker options
- ♦ 5 choices of termination

Typical Applications:

- ♦ Handheld Appliance
- ♦ Audio-Visual
- ♦ Power Supplies



Dielectric Strength

UL/CSA:
1000V-live to dead metal parts

Electrical Life

100,000 cycles- maintained
50,000 cycles- momentary
50,000 cycles- T-rating

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

651

1
Series

122

2
Circuit/Rating/
Termination

B

3
Actuator
Color

B

4
Base Color

A

5
Legend

N

6
Visi-Rocker End/
Legend Color

1 SERIES

651 Matte Finish

652 Gloss Finish

4 BASE COLOR

B Black

W White

2 CIRCUITRY / RATING / TERMINATION

10A 250VAC, 10A 125VAC, 1/4 HP, 125-250 VAC

	.187 Solder Lugs	.187 Tabs	PC Terms	PC Rt. Angle	Wire Leads
ON-NONE-OFF	121	122	123	124	125
(ON)-NONE-OFF	261¹	262	263	264	265
ON-NONE-(OFF)	361¹	362	363	364	365
ON-NONE-ON	421	422	423	424	425
ON-NONE-(ON)	561¹	562	563	564	565
ON-OFF-ON	681²	682	683	684	686
ON-OFF-(ON)	781²	782	783	784	785
(ON)-OFF-(ON)	881²	882	883	884	885

5 ROCKER LEGEND

	molded in ⁴	hot stamp
NO LEGEND	0	0
Off-On vertical	1	A
Off-On horizontal	—	B
I-O horizontal	8	D
I-O vertical	9	E
O on rocker end	—	F
II-O-I vertical	—	G
II-O-I horizontal	—	H

3 ACTUATOR COLOR

B Black

W White

6 VISI-ROCKER END / LEGEND COLOR

N N/A
B Black
V Visi-red
W White

Notes:

Additional ratings (including 14V T) & color options are available; Consult factory.



1 Rated 12A 125VAC, 6A 250 VAC, 1/4HP 125-250VAC.

2 Rated 8A 125-250VAC, 1/4HP 125-250VAC.

3 Additional colors available. Consult factory for details.

4 Available with Visi-Rocker option only.

() Indicates momentary function.

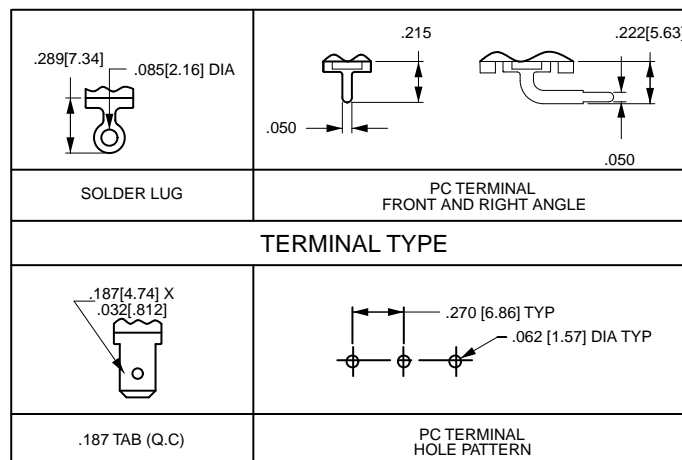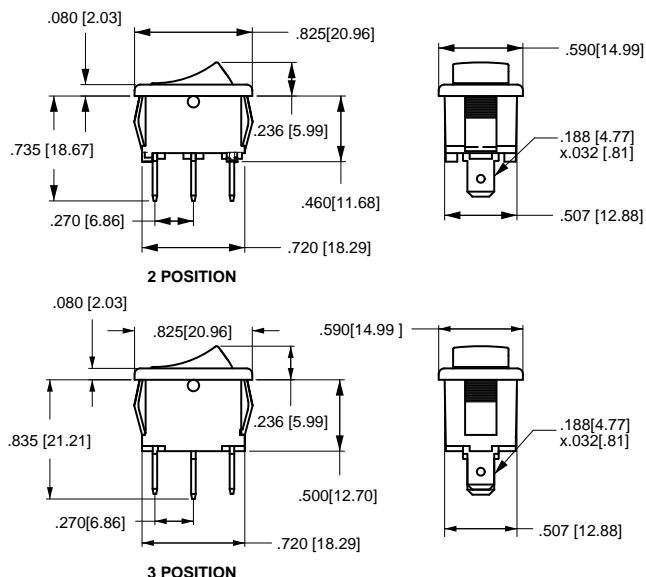**RECOMMENDED
PANEL
OPENING**

PANEL THICKNESS	A	B
.030[.76]-.050[1.27]	.508[12.90]	.756[19.20]
.050[1.27]-.078[1.98]	.508[12.90]	.764[19.40]
.078[1.98]-.125[3.17]	.508[12.90]	.780[19.81]

TEST CUT HOLE IN ACTUAL MATERIAL
$\begin{matrix} \uparrow & +.000[.00] \\ & -.004[.10] \\ \downarrow & \end{matrix}$

V-Series

CONTURA SWITCHES

Carling Technologies' sealed V-Series Contura switches are well known for their cutting edge design, high quality, maximum performance and unmatched reliability. These switches are a staple in the marine and transportation industries and have passed a range of environmental, corrosion, temperature, vibration, shock and sealing tests including MIL Std 202F, MIL Std 810C, UL 1500, ISO 8846, IEC 60529 and BS 5490 among others, making them one of the most rugged and reliable switches ever manufactured.



Resources:

[Download 3D CAD Files](#)

[IGS >](#) [STP >](#)

[Watch Product Video](#)



Product Highlights:

- ♦ Certified to IP66 with dual seals around lamps and rocker stem.
- ♦ Silver plated butt contact mechanism provides reliability up to and beyond 100K electrical cycles
- ♦ Greaseless construction withstands temperature extremes down to -40°C
- ♦ The switch accommodates up to 10 terminals and endless illumination and circuit options.
- ♦ The switch connector allows the user to preload FQC terminals for ease of assembly.
- ♦ Numerous choices of removable rockers allow for style change without having to retest or re-qualify the switch base.

Typical Applications:

- ♦ Marine Panels
- ♦ Emergency Vehicles
- ♦ Trucks
- ♦ Buses
- ♦ Construction Equipment
- ♦ Motorcycles & ATVs
- ♦ Farm Equipment
- ♦ Commercial Appliances
- ♦ Military Vehicles
- ♦ Mining Equipment
- ♦ Golf Carts
- ♦ Floor Cleaning Equipment
- ♦ Utility Vehicles



V-Series Switch

DESIGN FEATURES

INTERCHANGEABLE ACTUATORS


Panel redesign is a snap with our wide range of rocker styles. Achieve maximum design variety with minimum inventory. Simply swap rockers to create an entirely new look for your panel.

DUAL SEAL PROTECTION

Seals out water, dust, debris, and enables switch certification to IP66 for front panel components.

CLEAN CONNECTIONS

Options for both eight and ten terminal base styles with AMP & Packard compatible connectors affords myriad circuit options while providing ease of assembly.

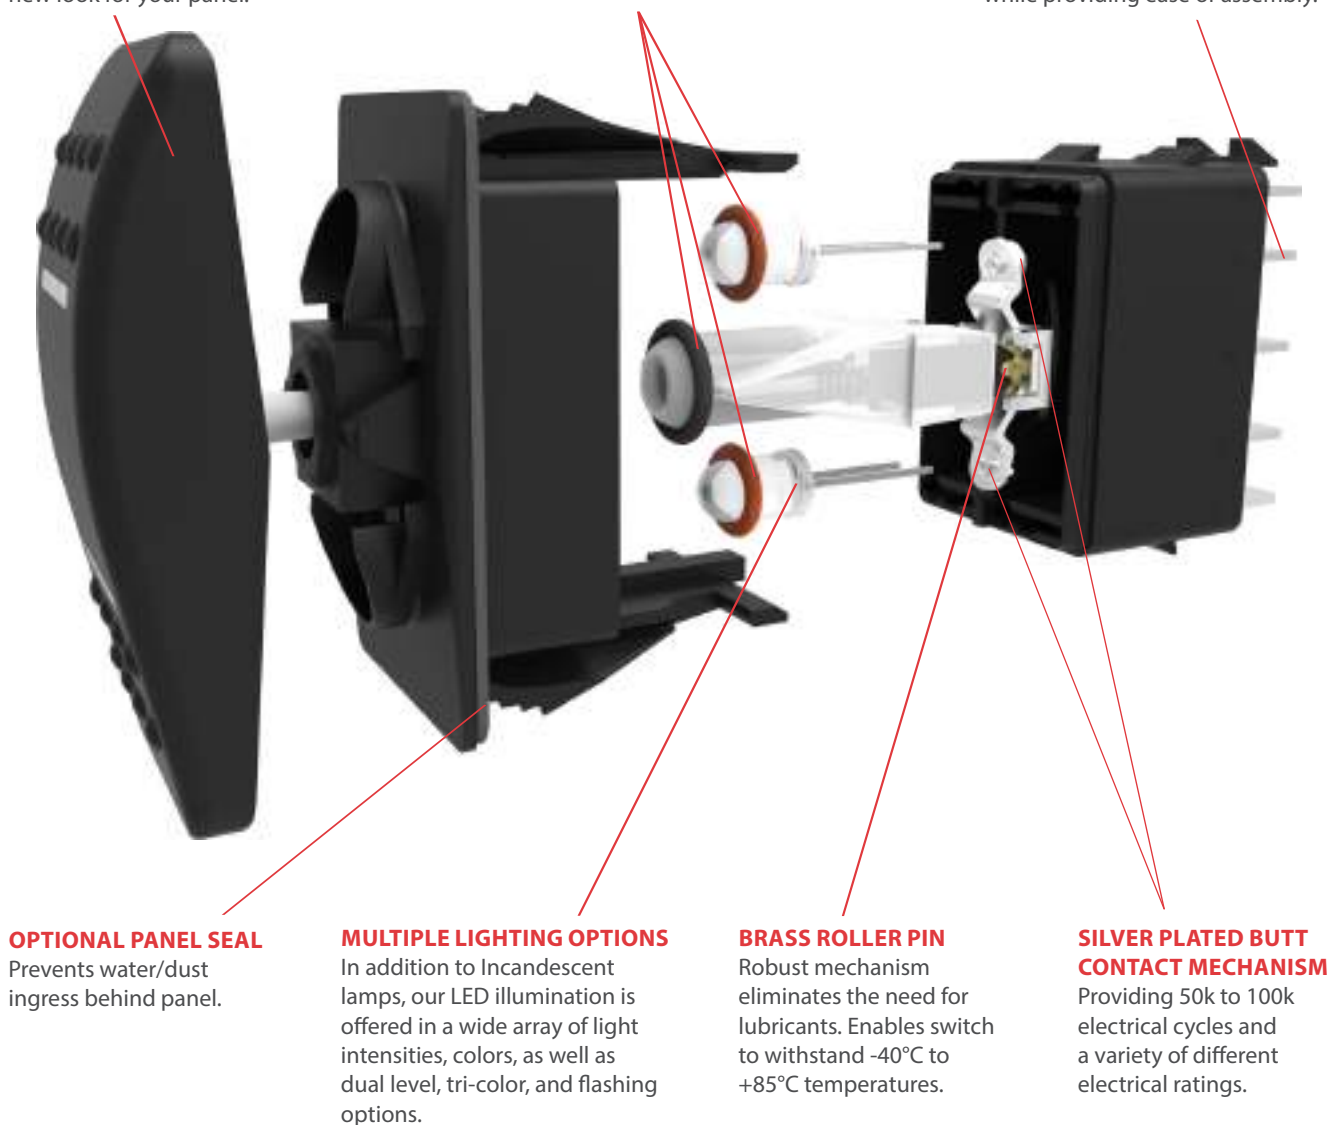

OPTIONAL PANEL SEAL

Prevents water/dust ingress behind panel.

MULTIPLE LIGHTING OPTIONS

In addition to Incandescent lamps, our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

BRASS ROLLER PIN

Robust mechanism eliminates the need for lubricants. Enables switch to withstand -40°C to +85°C temperatures.

SILVER PLATED BUTT CONTACT MECHANISM

Providing 50k to 100k electrical cycles and a variety of different electrical ratings.

Contura II & III



The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with a hard nylon overlay or a "soft-touch" elastomer overlay. These models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.

Contura X



The raised bracket/bezel on the Contura X helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This curved rocker style is available with a variety of lenses and legends.

Contura IV



The Contura IV's "Shape to create a Shape" actuator works with the curves, contours & advanced styling of the latest panel designs, flowing with these advanced curves & radii. This actuator style fits on the Contura flush bracket/bezel.

Contura XI



The raised bracket/bezel on the Contura XI helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This convex style rocker is available with a wide variety of lenses and legends.

Contura V



The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.

Contura XII



The Contura XII version features a paddle style actuator with the raised bracket/bezel of Contura X and XI. The contoured handle design provides intuitive recognition and ease of operation and is available with all Contura X and XI lens and legend offerings.

Contura VI (WAVE)



The Contura VI WAVE sealed rocker switches, when used in a row, create an uniquely appealing "wave" design on your panel. A variety of colors and finishes are available for both rocker and wave insert. Contura VI features bar and oval lenses.

Contura XIV



The Contura XIV represents a sleek new crossover rocker design which should appeal to Trucks, Buses and Heavy Vehicles as well as the Marine Industry. Intuitive feel is provided by recessed ridges along with a Center Groove which effectively defines the boundary between top and bottom switch functions.

Contura VII



Contura VII featuring gently curved corners and edges assuring compatibility with most any panel design. Intuitive feel is maximized by the use of 2 embossed circular pads located at opposite ends of the rocker. Any combination of Bar or Oval style lenses can be located in the pads providing a truly unique look, exclusive to Contura VII.

Illuminated Indicators & Accessories



Alert operator of systems functions or malfunctions, are offered with removable/replaceable lamps in Contura II, II, V or X styles. Accessories include connectors, mounting panels, hole plugs, panel seals, and actuator removal tools. Refer to accessories page for full details

Electrical

Contact Rating	.4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 1/2 HP 125-250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC 10A, 14VT 6A, 125VAC L
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 milliohms max. @ 4VDC
Life	50,000 - 100,000 cycles circuit dependent
Contacts	Silver alloy, silver tin-oxide, fine silver
Terminals	Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug, Wire Lead

Mechanical

Endurance	150,000 cycles minimum circuit dependent
-----------	--

Physical

Lighted	Incandescent - rated 10,000 hours Neon - rated 25,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)
Seals	Internal Optional external gasket panel seal
Base	Polyester blend rated to 125°C with a UL flammability rating of 94V0.
Contura II,III,IV,V, VI, VII Actuator	Hard Surface: Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay. Soft Surface: Basic actuator structure molded of thermoplastic polycarbonate with an elastomer overlay.
Contura X,XI,XII Actuator,VP	Nylon 66 Reinforced rated to 105°C
Lens	Polycarbonate rated at 100°C
Contura XIV	Polycarbonate lens/sub-rocker with ABS shell

Actuator Travel (Angular Displacement)

2 position	18°
3 positions	9° from center

Mounting Specifications


Panel Thickness Range

Gaskets Acceptable Panel Thickness

0	.030 to .250 (.76 to 6.35mm)
1	.030 to .109 & .147 to .157 (.76 to 2.77mm & 3.73 to 3.98mm)

Recommended: No gasket with panel

thickness of .032, .062, .093, .125, .187 or .250



Agency Certifications



Environmental

Sealing	Sealed version: IP66, this rating applies to front panel components of the actual switch only, and signifies complete protection against dust as well as powerful jets of water.
Corrosion	Mixed Flowing Gas (MFG) Class III 3 year accelerated exposure per ASTM B-827, B-845 Silver and gold contacts
Operating Temp.	-40°C to +85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Vibration 2	Resonance search 24-50 Hz 0.40 DA 50-2000 Hz ±10 G's peak Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10µ seconds chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 96 Hrs. Sealed version only.
Dust	Per Mil-Std 810C, Method 510.2 Air Velocity 300 ±200 Feet/Min, Test Duration 16 Hrs.
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Cond. A, -55°C to +85°C. Test criteria - pre and post test contact resistance
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance
Ignition Protection	All Contura switches with sealed construction meet the requirements of UL1500/ISO8846 for ignition protection, in addition to conformance with EC directive 94/25/EC for marine products.

V	1	D	A	B	T	O	B	-	A	R	B	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Color	12 Legend	13 Legend Orientation	14 Actuator Lens Legend		

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch:
 8 terminal 10 terminal SP - single pole - uses terminals 1, 2 & 3.
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
 8 - 7 8 - 7 Terminals 7, 8, 9 & 10 for lamp circuit only.
 1 - 4 1 - 4
 2 - 5 2 - 5
 3 - 6 3 - 6
 10 - 9 10 - 9

Position:	1	2	3
SP DP:	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	ON	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)

SPECIAL CIRCUITS	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	2 & 3, 5 & 6	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	2 & 1
R*	(2 & 3, 5 & 6)	2 & 3	5 & 1
E*	5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 3

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
A	1	1	INDEPENDENT	8 (+) 7 (-)
B	2	1	DOWN	3 (+) 7 (-)
C	3	2	UP	3 (+) 7 (-)
D	4	1	DOWN	3 (+) 7 (-)
E	5	2	DOWN	1 (+) 7 (-)
F	6	1	UP	1 (+) 7 (-)
G	7	2	UP	3 (+) 6 (-)
H	Z	1	INDEPENDENT	8 (+) 7 (-)
U	Y	1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	10 (+) 9 (-)
SINGLE POLE SWITCHES ONLY				
J	8	1	DOWN	3 (+) 8 (-)
K	W	2	INDEPENDENT	6 (+) 7 (-)
		1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	6 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
L	9	1	DOWN	3 (+) 6 (-)
M	R	1	UP	3 (+) 6 (-)
N	T	1	DOWN	3 (+) 6 (-)
P	V	2	DOWN	1 (+) 4 (-)
		1	UP	1 (+) 4 (-)
		2	UP	3 (+) 6 (-)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	0	125VAC	2 250VAC	6 12V	7 18V	8 24V
Neon	1	4 3V	5 6V	superbright	superbright	
Incandescent	2			Green	Red	
LED*	3	Red	Amber	F	R	
	A	L		G	S	
2VDC	B	M		H	T	
6VDC	C	N		J	V	
12VDC	D	P				
24VDC						


* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

No Seal	Black	White	Gray
One Seal	B	W	G
	C	Y	H

9 ACTUATOR

0	No Actuator
A, B	Contura II
C, D	Contura III



Actuator orientation above terminals: 3.6 1.4

10 LENS

0 - No Actuator	Z - No Lens	Blue
Clear White	Amber	Green
1 6	8	G
2 7	C	H
3 8	D	J
4 9	E	K
5 A	F	L
		S
		Y

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR 1 AND TEXTURE

0 - No Actuator	Black	Gray	Red	White
Soft Surface	B	G	R	W
Hard Surface	C	H	S	Y

12 ACTUATOR LENS OR BODY LEGENDS 2


11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F	F	F

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION

0 No legend (used with codes 11-18 in selection 12)

1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

**14 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14. For legend options & codes, visit us at www.carlingtech.com.

Notes:

- Consult factory to verify horsepower rating for your particular circuit choice.
- Custom colors are available. Consult factory.
- Body legends not available on Soft surface actuators; White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
- Additional ratings available. See V-Series Switch Accessories page.
- Contura II available with two square lenses. Consult factory for details.

V	1	D	A	S	W	0	B	-	A	Z	E	00	-	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Function	12 Legend	13 Legend Orientation		

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - 7 8 - 7
1 - 4 1 - 4
2 - 5 2 - 5
3 - 6 3 - 6
10 - 9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
4 D	ON	NONE	ON
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)
9 N	OFF	NONE	ON

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3, 5 & 6	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	2 & 3, 5 & 6	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	2 & 1
R*	(2 & 3, 5 & 6)	5 & 3	5 & 1
E*	5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	3 (+) 7 (-)
C	3	2	UP	8 (+) 7 (-)
H	Z	2	INDEPENDENT	3 (+) 6 (-)
DOUBLE POLE SWITCHES ONLY				
M	R	1	UP	3 (+) 6 (-)

6 LOCK

Lock above terminals 1 & 4 end of switch
W lock

7 LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	0	2 250VAC	6 12V superbright	7 18V superbright	8 24V
Neon	1 125VAC	5 6V	Green	Red	
Incandescent	4 3V				
LED*					
2VDC	Red A	Amber L			
6VDC	B	M			
12VDC	C	N			
24VDC	D	P			

*Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

No Seal	Black B	White W	Gray G
One Seal	C	Y	H

9 HARD SURFACE ACTUATOR 1

	Black A	Gray B	Red G	White H
Contura II	A	B	G	H
Contura III	C	D	E	F

Actuator orientation above terminals:

10 LENS

Z - No Lens	Amber D	Green J	Red P	Blue V
Clear White	3	8		

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR 1

Lock Color	Up	Down	Up & Down	Center 3
Match Actuator	A	H	R	1
Black	B	J	S	2
White	C	K	T	3
Red	D	L	V	4
Safety Orange	E	M	W	5

12 ACTUATOR LENS OR BODY LEGEND 2

00 - No Legend

21 OFF	22 ON	23 O	24 I
25 O	26 O	27 O	28 I
F	N		

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION

0	No legend (used with codes 21-28 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
- Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
- Additional ratings available. See V-Series Switch Accessories page.

V	1	D	A	B	T	0	B	-	E	P	C	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Color	12 Legend	13 Legend Orientation	14 Actuator Lens Legend		

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. 8 terminal 10 terminal DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - -7 8 - -7
1 - -4 1 - -4
2 - -5 2 - -5
3 - -6 3 - -6
10 - -9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected	Terminals 1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	ON	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3, 5 & 6	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	(2 & 3, 5 & 6)	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	2 & 1
R*	5 & 6	5 & 3	5 & 1
E*			

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 4

B	.4VA @ 28VDC Resistive
1	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
A	1	1	INDEPENDENT	8 (+) 7 (-)
B	2	1	DOWN	3 (+) 7 (-)
C	3	2	UP	3 (+) 7 (-)
D	4	1	DOWN	3 (+) 7 (-)
E	5	2	DOWN	1 (+) 7 (-)
F	6	1	UP	1 (+) 7 (-)
G	7	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
U	Y	2	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	10 (+) 9 (-)
SINGLE POLE SWITCHES ONLY				
J	8	1	DOWN	3 (+) 8 (-)
K	W	2	INDEPENDENT	6 (+) 7 (-)
		1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	6 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
L	9	1	DOWN	3 (+) 6 (-)
M	R	1	UP	3 (+) 6 (-)
N	T	1	DOWN	3 (+) 6 (-)
		2	DOWN	1 (+) 4 (-)
P	V	1	UP	1 (+) 4 (-)
		2	UP	3 (+) 6 (-)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	0				
Neon	1 125VAC	2 250VAC			
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	A	L	F	R	
6VDC	B	M	G	S	
12VDC	C	N	H	T	
24VDC	D	P	JV		

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

No Seal	Black	White	Gray
One Seal	B	W	G
	C	Y	H

9 ACTUATOR

0	No Actuator
E	Contura IV, left orientation
T	Contura IV, left orientation, laser etched
F	Contura IV, right orientation
R	Contura IV, right orientation, laser etched

Actuator orientation above terminals:

**10 LENS**

0 - No Actuator Z - No Lens

Clear	White	Amber	Green	Red	Blue
1	6	8	G	M	T
2	7	C	H	N	U
3	8	D	J	P	V
4	9	E	K	R	W
5	A	F	L	S	Y

Len's color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR 1,5,6

No Actuator	0	Black	C	Gray	H	Red	S
White	Y	Nickel	D	Pewter	E		

12 ACTUATOR LENS OR BODY LEGENDS 2


11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F		
F	F		

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION

0 No legend (used with codes 11-18 in selection 12)

1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

**14 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14. For legend options & codes, visit us at www.carlingtech.com.

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
- Gloss brow is on left side of E actuator and right side of F actuator.
- Additional ratings available. See V-Series Switch Accessories page.
- Laser etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
- Pewter and nickel colors only available with laser etched actuator.

V	1	D	A	B	T	0	B	-	G	P	C	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. 8 terminal 10 terminal DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - - 7 8 - - 7
1 - - 4 1 - - 4
2 - - 5 2 - - 5
3 - - 6 3 - - 6
10 - - 9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	ON	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	2 & 3, 5 & 6	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	2 & 1
E*	(2 & 3, 5 & 6)	2 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 4

B	.4VA @ 28VDC Resistive
1	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
A	1	1	INDEPENDENT	8 (+) 7 (-)
B	2	1	DOWN	3 (+) 7 (-)
C	3	2	UP	3 (+) 7 (-)
D	4	1	DOWN	3 (+) 7 (-)
E	5	2	DOWN	1 (+) 7 (-)
F	6	1	UP	1 (+) 7 (-)
G	7	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
U	Y	1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	10 (+) 9 (-)

SINGLE POLE SWITCHES ONLY

J	8	1	DOWN	3 (+) 8 (-)
K	W	2	INDEPENDENT	6 (+) 7 (-)
		1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	6 (+) 7 (-)

DOUBLE POLE SWITCHES ONLY

L	9	1	DOWN	3 (+) 6 (-)
M	R	1	UP	3 (+) 6 (-)
N	T	1	DOWN	3 (+) 6 (-)
		2	DOWN	1 (+) 4 (-)
P	V	1	UP	1 (+) 4 (-)
		2	UP	3 (+) 6 (-)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	0	1 125VAC	2 250VAC	6 12V	7 18V	8 24V
Neon				superbright	superbright	
Incandescent	4 3V	5 6V		Green	Red	
LED*				F	T	V
	Red	Amber				
2VDC	A	L				
6VDC	B	M				
12VDC	C	N				
24VDC	D	P				

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

No Seal	Black	White	Gray
One Seal	B	W	G
	C	Y	H

9 ACTUATOR

0	No Actuator
G	Contura V
P	Contura V, laser etched

10 LENS

0 - No Actuator			Z - No Lens		style & location: #1 / #2	
Clear	White	Amber	Green	Red	Blue	
1	6	8	G	M	T	bar
2	7	C	H	N	U	bar/bar
3	8	D	J	P	V	oval
4	9	E	K	R	W	oval/bar
5	A	F	L	S	Y	oval/oval


Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR 1,3,5

No Actuator	0	Black	C	Gray	H	Red	S
White	Y	Nickel	D	Pewter	E		

12 ACTUATOR LENS OR BODY LEGENDS 2,6

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F		
F	F		



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION

0 No legend (used with codes 11-18 in selection 12)

1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

**14 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.

For legend options & codes, visit us at www.carlingtech.com.

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
- Laser Etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
- Additional ratings available. See V-Series Switch Accessories page.
- Nickel and Pewter colors only available with laser etched actuator.
- Consult factory for laser etched lens callout.

V	1	D	A	S	W	O	B	-	J	Z	E	00	-	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Function	12 Legend	13 Legend Orientation		

1 SERIES

V

2 CIRCUIT 3

Terminal Connections as viewed () - momentary
from bottom of switch: SP - single pole - uses terminals 1, 2 & 3.
8 terminal 10 terminal DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
4 D	ON	NONE	ON
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)
9 N	OFF	NONE	ON

3 RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1 A	2	.250 TAB (QC) no barriers	No
4 B	5	.250 TAB (QC) with barriers	No
6 J	8	.250 TAB (QC) no barriers	Yes T2 to 5
7 K	9	Solder Lug no barriers	No
8 L	10	Solder Lug	No
9 E		Wire Leads no barriers	No
		Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only				
Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
C	3	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
M	R	1	UP	3 (+) 6 (-)

6 LOCK

Lock above terminals 1 & 4 end of switch.
W low profile lock Y 6 high profile lock

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.

2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.

3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.

4 Additional ratings available. See V-Series Switch Accessories page.

5 Located at T3-6 end of switch.

6 Contura V style only.

7 LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	0	1 125VAC	2 250VAC	6 12V	7 18V	8 24V
Neon	1	4 3V	5 6V	superbright	superbright	
Incandescent	4			Green	Red	
LED*		Red	Amber			
	A	L	F			
2VDC	B	M	G			
6VDC	C	N	H			
12VDC	D	P	J			
24VDC						

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

No Seal	Black	White	Gray
One Seal	B	W	G
	C	Y	H

9 HARD SURFACE ACTUATOR

CONTURA IV:

Orientation	Black	Gray	Red	White
Left	J	K	L	M
Right	N	P	R	S

CONTURA V:

Orientation	Black	Gray	Red	White
	U	V	W	Y

Actuator orientation above terminals: 3, 6 1, 4

10 LENS 5

Z - No Lens						
Clear	White	Amber	Green	Red	Blue	
A	B	C	D	E	F	bar lens
G	H	J	K	L	M	oval lens

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR 1

Lock Color	Up	Down	Up & Down Center 3
Match Actuator	A	H	R
Black	B	J	S
White	C	K	T
Red	D	L	V
Safety Orange	E	M	W
Gray	F	G	N

12 ACTUATOR LENS OR BODY LEGEND 2


00 - No Legend

21	22	23	24
OFF	ON	O	I
25	26	27	28
O	N	O	I
F			

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



V	1	D	B	G	N	T	B	-	H	A	7	C	B	AC	-	1	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Lens	12 Color	13 Insert Color	14 Actuator Lens	15 Legend Orientation	16 Actuator Lens Legend		

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. 8 terminal 10 terminal DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - - 7 8 - - 7
1 - - 4 1 - - 4
2 - - 5 2 - - 5
3 - - 6 3 - - 6
10 - - 9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected	Terminals 1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	(ON)	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3, 5 & 6	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	(2 & 3, 5 & 6)	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	2 & 1
E*	5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING³

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
A	1	1	INDEPENDENT	8 (+) 7 (-)
B	2	1	DOWN	3 (+) 7 (-)
C	3	2	UP	3 (+) 7 (-)
D	4	1	DOWN	3 (+) 7 (-)
E	5	2	DOWN	1 (+) 7 (-)
F	6	1	UP	1 (+) 7 (-)
G	7	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
U	Y	1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	10 (+) 9 (-)
SINGLE POLE SWITCHES ONLY				
J	8	1	DOWN	3 (+) 8 (-)
K	W	1	INDEPENDENT	6 (+) 7 (-)
		1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	6 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
L	9	1	DOWN	3 (+) 6 (-)
M	R	1	UP	3 (+) 6 (-)
N	T	1	DOWN	3 (+) 6 (-)
		2	DOWN	1 (+) 4 (-)
P	V	1	UP	1 (+) 4 (-)
		2	UP	3 (+) 6 (-)

7 LAMP

Lamp above terminals 3 & 6 end of switch

No lamp	0	1 125VAC	2 250VAC	6 12V superbright	7 18V superbright	8 24V
Neon	1	4 3V	5 6V	Green	Red	
Incandescent LED*	4			F	R	
		Red	Amber	G	S	
2VDC	A			H	T	
6VDC	B			J	V	
12VDC	C					
24VDC	D					

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR¹, PANEL SEAL

No Seal	Black	White	Gray
One Seal	B	W	G
	C	Y	H

9 ACTUATOR

0	No Actuator	H	High Insert	L	Low Insert
---	-------------	---	-------------	---	------------

10,11 LENS⁴

	0 - No Actuator	Clear	White	Amber	Green	Red	Blue	Z - No Lens
-	7	C	H	N	U			Bar Lens Translucent
3	-	D	J	P	V			Bar Lens Transparent
4	-	E	K	R	W			Oval Lens Transparent
-	A	F	L	S	Y			Oval Lens Translucent

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

12 ACTUATOR COLOR

C	Black	H	Gray	S	Red	Y	White
---	-------	---	------	---	-----	---	-------

13 INSERT COLOR

B	Black	N	Bright Nickel Plated
C	Bright Chrome Plated	S	Satin Chrome Plated
D	Satin Chrome Painted	T	Satin Nickel Plated
		W	White

14 ACTUATOR LENS OR BODY LEGENDS²

00 - No Legend this location / No actuator

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F		
F	F		

For additional legend options & codes, visit us at www.carlingtech.com.

15 LEGEND ORIENTATION

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



16 ACTUATOR LENS LEGEND

00 - No legend this location / no actuator

(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.

For legend options & codes, visit us at www.carlingtech.com.

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.

2 White imprinting is standard on black actuators. Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.

3 Additional ratings available. See V-Series Switch Accessories page.

V	1	D	A	B	6	0	1	-	6	P	Z	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Lens	12 Legend	13 Legend Orientation	14 Actuator Lens Legend		

1 SERIES V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch:
 8 terminal 10 terminal SP - single pole - uses terminals 1, 2 & 3.
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
 Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	ON	NONE	OFF
2	(ON)	NONE	OFF
3	ON	NONE	(OFF)
4	ON	NONE	ON
5	ON	NONE	(ON)
6	ON	OFF	ON
7	ON	OFF	(ON)
8	(ON)	OFF	ON

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 6	2 & 3, 5 & 4	5 & 4
H*	2 & 3	2 & 3, 5 & 6	2 & 3	OFF
G*	(2 & 3, 5 & 6)	(2 & 3, 5 & 6)	(2 & 3, 5 & 6)	1 & 2
S*	(2 & 3, 5 & 6)	(2 & 3, 5 & 6)	(2 & 3, 5 & 6)	OFF
M*	5 & 6	5 & 6	5 & 3	2 & 1
E*			5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
A	1	1	INDEPENDENT	3 (+) 7 (-)
B	2	1	DOWN	3 (+) 7 (-)
C	3	2	UP	3 (+) 7 (-)
D	4	1	DOWN	3 (+) 7 (-)
E	5	2	DOWN	1 (+) 7 (-)
F	6	1	UP	1 (+) 7 (-)
G	7	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
U	Y	1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	10 (+) 9 (-)
SINGLE POLE SWITCHES ONLY				
J	8	1	DOWN	3 (+) 8 (-)
K	W	2	INDEPENDENT	6 (+) 7 (-)
		1	INDEPENDENT	8 (+) 7 (-)
		2	INDEPENDENT	6 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
L	9	1	DOWN	3 (+) 6 (-)
M	R	1	UP	3 (+) 6 (-)
N	T	1	DOWN	3 (+) 6 (-)
P	V	2	DOWN	1 (+) 4 (-)
		1	UP	1 (+) 4 (-)
		2	UP	3 (+) 6 (-)

6,7 LAMP (same coding for both selections)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	0	1 125VAC	2 250VAC	6 12V	7 18V	8 24V
Neon	4 3V	5 6V	6 12V	7 18V	8 24V	
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V	
LED*						
	Red	Amber	Green	superbright	superbright	
2VDC	A	L	F	R	S	
6VDC	B	M	G	T		
12VDC	C	N	H			
24VDC	D	P	J			

*Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 BRACKET COLOR 1, PANEL SEAL (EXTERNAL FOAM GASKET)

X & XI with Flush Bracket X, XI, XII with Raised Bracket

# of gaskets	0	1	2	0	1
Black	B	C	D	1	4
White	W	Y	Z	2	5
Gray	G	H	J	3	6

9 ACTUATOR

No Actuator	0	Black	Gray	White	Red
Contura X	1	1	2	3	4
Contura XI	6	7	8	9	
Contura XII	J	K	N	M	

Actuator orientation above terminals:



10 LENS - ABOVE LAMP #1 TERMINALS 1,4

11 LENS - ABOVE LAMP #2 TERMINALS 3,6

0 - No Actuator	Z - No Lens	Clear	White	Amber	Green	Red	Blue	Lens Style
3	8	D	J	P	V	Bar		
4	9	E	K	R	W	One piece Square		
5	A	F	L	S	Y	Two piece Square*		
						(With clear top protective lens)		
2	7	C	H	N	U	Two piece Square*		
						(With smoke top protective lens)		
1	6	B	G	M	T	Two piece Square*		
						(With white top protective lens)		

* All bottom lenses are molded of opaque material. Consult factory for other lens colors. Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

12 ACTUATOR LENS OR BODY LEGEND 2



00 - No Legend this location/No actuator	
11 ON 12 OFF 13 I 14 O	
OFF ON O I	
15 O O 16 O O 17 O I 18 I O	
F N F F	
21 OFF 22 ON 23 O 24 I	
25 O 26 O 27 O 28 I	
F N	

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION 3

0 No legend (used with codes 11-18 in selection 12)

1 Orientation 1	
2 Orientation 2	
3 Orientation 3	
4 Orientation 4	



14 ACTUATOR LENS LEGEND

00 No legend this location / no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.

For legend options & codes, visit us at www.carlingtech.com.

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators. Custom colors are available, consult factory.
- With 2 square lenses, use selection 12 for lens above lamp 1, & selection 14 for lens above lamp 2.
- Additional ratings available. See V-Series Switch Accessories page.
- Not available with Contura XI rockers.

V	1	D	A	S	W	0	1	-	1	P	B	00	-	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Function	12 Legend	13 Legend Orientation		

1 SERIES

V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - 7 8 - 7
1 - 4 1 - 4
2 - 5 2 - 5
3 - 6 3 - 6
10 - 9

Position:	1	2	3
SP DP:	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
4 D	ON	NONE	ON
6 J	ON	OFF	ON
9 N	OFF	NONE	ON

SPECIAL CIRCUITS

	2 & 3	2 & 3, 5 & 4	5 & 4
H*	2 & 3, 5 & 6	2 & 3	OFF
G*	2 & 3, 5 & 6	2 & 3	1 & 2
S*	5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING 4

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)
M	.4VA/20A 12V
N	.4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	5	Solder Lug no barriers	No
C	D	Solder Lug	No
5	6	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	0	NONE	-	-
C	3	2	UP	3 (+) 7 (-)
H	Z	2	INDEPENDENT	8 (+) 7 (-)
DOUBLE POLE SWITCHES ONLY				
M	R	1	UP	3 (+) 6 (-)

6 LOCK

Lock above terminals 1 & 4 end of switch.
W Lock

6,7 LAMP (same coding for both selections)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	0				
Neon	1 125VAC	2 250VAC			
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	A	L	F	R	
6VDC	B	M	G	S	
12VDC	C	N	H	T	
24VDC	D	P	J	V	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR 1, PANEL SEAL

	Black	White	Gray
No Gasket	1	2	3
One Gasket	4	5	6

9 HARD SURFACE ACTUATOR

Contura X	Black	Grey	Red	White
	1	2	3	4

Actuator orientation above terminals: 3,6 1,4

10 LENS - ABOVE LAMP #2 TERMINALS 5

Z - No Lens	Clear	White	Amber	Green	Red	Blue	Lens Style
3	8	D	J	P	V		Bar
4	9	E	K	R	W		One piece Square
5	A	F	L	S	Y		Two piece Square* (with clear top protective lens)
2	7	C	H	N	U		Two piece Square* (with smoke top protective lens)
1	6	B	G	M	T		Two piece Square* (with white top protective lens)

* All bottom lenses are molded of opaque material. Consult factory for other lens colors.
Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR 3

Lock Color	Up	Down	Up & Down
Match Actuator	A	H	R
Black	B	J	S
White	C	K	T
Red	D	L	V
Gray	E	M	W
Safety Orange	F	N	Y


12 ACTUATOR LENS OR BODY LEGEND 2

00 - No Legend	21	22	23	24
OFF	ON	O	I	
25 O	26 O	27 O	28 I	
F	N			

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION 3

0	No legend (used with codes 11-18 in selection 12)
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
- Located over T1-4 end of switch.
- Additional ratings available. See V-Series Switch Accessories page.
- Located over T3-6 end of switch.

V	1	D	B	B	C	0	B	-	FA	P	C	AB	-	1	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket	9 Actuator	10 Lens	11 Actuator Color	12 Legend	13 Legend Orientation	14 Actuator, Lens Legends		

1 SERIES V

2 CIRCUIT

Terminal Connections as viewed () - momentary from bottom of switch: SP - single pole - uses terminals 1, 2 & 3. 8 terminal 10 terminal DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - 7 8 - 7
1 - 4 1 - 4
2 - 5 2 - 5
3 - 6 3 - 6
10 - 9

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1 A	ON	NONE	OFF
2 B	(ON)	NONE	OFF
3 C	ON	NONE	(OFF)
4 D	ON	NONE	ON
5 F	ON	NONE	(ON)
6 J	ON	OFF	ON
7 K	ON	OFF	(ON)
8 L	(ON)	OFF	(ON)

SPECIAL CIRCUITS

H*	2 & 3	2 & 3, 5 & 4	5 & 4
G*	2 & 3, 5 & 6	2 & 3	OFF
M*	(2 & 3, 5 & 6)	2 & 3	OFF
R*	(2 & 3, 5 & 6)	2 & 3	2 & 1
E*	5 & 6	5 & 3	5 & 1
S*	2 & 3, 5 & 6	2 & 3	1 & 2

*Jumper between terminals 2 & 5 for circuits H, G, M, R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING ³

1	.4VA @ 28VDC Resistive
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuit 1, 4, A & D only)
F	10A 14V, 6A 14VT (circuit G only)

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) no barriers	No
A	B	.250 TAB (QC) with barriers	No
J	K	.250 TAB (QC) no barriers	Yes T2 to 5
3	4	Solder Lug no barriers	No
C	D	Solder Lug	No
5	F	Wire Leads no barriers	No
E	F	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

S	Lamps	Illumination Type	Lamp wired to Terminals
A	1	INDEPENDENT	8 (+) 7 (-)
B	1	DOWN	3 (+) 7 (-)
C	2	UP	3 (+) 7 (-)
D	1	DOWN	3 (+) 7 (-)
E	2	DOWN	1 (+) 7 (-)
F	1	UP	1 (+) 7 (-)
G	2	UP	3 (+) 7 (-)
H	1	INDEPENDENT	8 (+) 7 (-)
I	2	UP	3 (+) 6 (-)
J	1	INDEPENDENT	8 (+) 7 (-)
K	2	UP	3 (+) 6 (-)
L	1	INDEPENDENT	8 (+) 7 (-)
M	2	INDEPENDENT	8 (+) 7 (-)
N	1	DOWN	3 (+) 6 (-)
O	2	UP	3 (+) 6 (-)
P	1	DOWN	1 (+) 4 (-)
Q	2	UP	1 (+) 4 (-)
R	1	INDEPENDENT	3 (+) 6 (-)
S	2	INDEPENDENT	8 (+) 7 (-)
T	1	INDEPENDENT	10 (+) 9 (-)
U	2	INDEPENDENT	10 (+) 9 (-)

6 & 7 LAMP

No lamp	0	2 250VAC	6 12V superbright Green	7 18V superbright Red	8 24V
Neon	1 125VAC	5 6V			
Incandescent LED*	4 3V				
	Red	Amber			
2VDC	A	L	F	R	
6VDC	B	M	G	S	
12VDC	C	N	H	T	
24VDC	D	P	J	V	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 BRACKET COLOR & PANEL SEAL

Color	No Gasket	1 Gasket	2 Gasket
Black	B	C	D
Gray	G	H	J
White	W	Y	Z

9 ACTUATOR STYLE

0	No Actuator - Furnished separately
FA	Contura XIV
FB	Contura XIV - Laser Etched



10 LENS COLOR / STYLE

0 - No Actuator			Z - No Lens		
Clear	White	Amber	Green	Red	Blue
1	6	B	G	M	T
2	7	C	H	N	U
3	8	D	J	P	V
4	9	E	K	R	W
5	A	F	L	S	Y
5	A	N/A	N/A	N/A	N/A



11 ACTUATOR COLOR ¹

0	N/A - No Actuator
C	Black
S	Red
Y	White

12 ACTUATOR LENS or BODY LEGEND ²


00 - No Legend this location/No actuator

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F	F	F



13 LEGEND ORIENTATION

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



14 ACTUATOR / LENS LEGEND

00 No legend this location / no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.

For legend options & codes, visit us at www.carlingtech.com.

Notes:



Consult factory to verify horsepower rating for your particular circuit choice.

- 1 Custom colors are available. Consult factory.
- 2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators.
- 3 Additional ratings available. See V-Series Switch Accessories page.

Dimensional Specifications: in. [mm]



CONTURA II

SHOWN WITH
SQUARE LENS



8 TERMINAL BASE
W/BARRIERS



CONTURA III




8 TERMINAL BASE
W/O BARRIERS

CONTURA IV


SHOWN WITH
BAR LENS




10 TERMINAL BASE
W/BARRIERS




8 TERMINAL BASE
W/BARRIERS




10 TERMINAL BASE
W/O BARRIERS




10 TERMINAL BASE
W/O BARRIERS




SWITCH SHOWN WITH
VCH CONNECTOR 8
TERMINAL



BOTTOM VIEW
TERMINAL
ARRANGEMENT
8 TERMINAL BASE



BOTTOM VIEW
TERMINAL
ARRANGEMENT
10 TERMINAL BASE





SWITCH SHOWN WITH
VC1 CONNECTOR 10
TERMINAL


Dimensional Specifications: in. [mm]

CONTURA V


SHOWN WITH
BAR LENS



8 TERMINAL BASE
W/BARRIERS

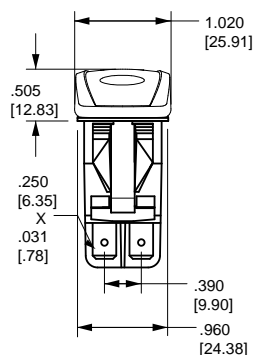



8 TERMINAL BASE
W/BARRIERS




SWITCH SHOWN WITH
VCH CONNECTOR 8
TERMINAL

CONTURA V


SHOWN WITH
LOW PROFILE LOCK




8 TERMINAL BASE
W/O BARRIERS

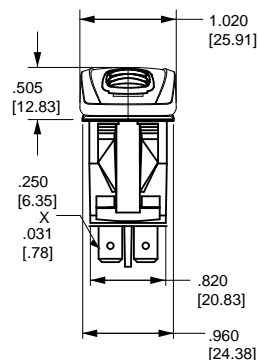

8 TERMINAL BASE
W/O BARRIERS





BOTTOM VIEW
TERMINAL
ARRANGEMENT
8 TERMINAL BASE




BOTTOM VIEW
TERMINAL
ARRANGEMENT
10 TERMINAL BASE

CONTURA VI


SHOWN WITH OVAL
LENS



10 TERMINAL BASE
W/BARRIER AND
LAMP TERMINAL





10 TERMINAL BASE
W/O BARRIERS




SWITCH SHOWN WITH
VC1 CONNECTOR 10
TERMINAL

CONTURA VII

SHOWN WITH LARGE LENS
AND BAR LENS



10 TERMINAL BASE
W/O BARRIERS



10 TERMINAL BASE
W/O BARRIERS





SWITCH SHOWN
WITH VC1
CONNECTOR 10
TERMINAL


Dimensional Specifications: in. [mm]

CONTURA X


SHOWN WITH RAISED BRACKET



8 TERMINAL BASE
W/BARRIERS





8 TERMINAL BASE
W/BARRIERS




SWITCH SHOWN WITH
VCH CONNECTOR
8 TERMINAL

CONTURA XI


SHOWN WITH RAISED
BRACKET AND TWO SQUARE
LENSES




10 TERMINAL BASE
W/O BARRIERS



10 TERMINAL BASE
W/BARRIERS





BOTTOM VIEW
TERMINAL
ARRANGEMENT
8 TERMINAL BASE




BOTTOM VIEW
TERMINAL
ARRANGEMENT
10 TERMINAL BASE

CONTURA XII


SHOWN WITH PADDLE
ACTUATOR



8 TERMINAL BASE
W/O BARRIERS

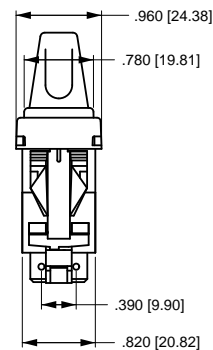



10 TERMINAL
BASE
W/O BARRIERS





SWITCHES SHOWN WITH
VC1 CONNECTOR
10 TERMINAL

CONTURA XIV

SHOWN WITH LARGE LENS



10 TERMINAL BASE
W/O BARRIERS

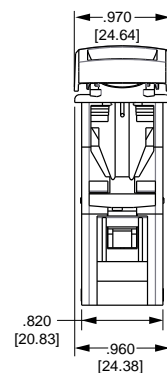

SWITCHES SHOWN WITH
VC1 CONNECTOR
10 TERMINAL

Circuit Diagrams:

CIRCUIT	CIRCUIT DIAGRAM
1	
2	
3	
4	
5	
6	
7	
8	

CIRCUIT	CIRCUIT DIAGRAM
A	
B	
C	
D	
E	
F	
G	
H	

CIRCUIT	CIRCUIT DIAGRAM
J	
K	
L	
M	
R	
S	

SYMBOL LEGEND	
SYM.	DEFINITION
	DESIGNATES TERMINALS AND CONTACTS
	DESIGNATES LAMP LOCATION
	DESIGNATES MAINTAINED CIRCUITS
	DESIGNATES OTHER POSITION
	DESIGNATES MOMENTARY CIRCUITS
	DESIGNATES TWO POSITION CONNECTION
	DESIGNATES EXTERNAL JUMPER PROVIDED BY CUSTOMER

Lamp Circuit Diagrams:

LAMP CIRCUIT	CIRCUIT DIAGRAM	LAMP CIRCUIT	CIRCUIT DIAGRAM	LAMP CIRCUIT	CIRCUIT DIAGRAM	LAMP CIRCUIT	CIRCUIT DIAGRAM
A/1		F/6		L/9		SPECIAL #1	
B/2		G/7		M/R		SPECIAL #3	
C/3		H/Z		N/T		SPECIAL #4	
D/4		J/8		P/V			
E/5		K/W		U/Y			

Hazard Warning Circuit Diagrams:

CIRCUIT	CIRCUIT DIAGRAM	CIRCUIT	CIRCUIT DIAGRAM	CIRCUIT	CIRCUIT DIAGRAM
J1		J5		JA	
J2				JJ	
J3				JK	
J4					

NOTE:
J circuits are available for all non-locking V-Series styles. Consult factory for p/n details.

SYMBOL LEGEND	
SYM.	DEFINITION
	DESIGNATES TERMINALS AND CONTACTS
	DESIGNATES LAMP LOCATION

Rotary

V-Series

CONTURA ROTARY SWITCHES

The V-Series Contura Rotary Switch was designed for maximum performance and reliability leveraging the features of the widely popular V-series Contura Rocker Switches. Available in maintained and momentary circuit options, the V-Series Rotary features a sturdy knob construction, up to three separate LEDs, and fits in an industry standard panel opening.

Internally, the V-Series Contura Rotary uses a patented mechanism that translates rotary to linear motion. This allows for common switch functionality and terminal connections with the V-Series rocker version and requires no harness change. A secondary CAM, which helps drive the mechanism, provides definitive detent positions and prevents the switch from stopping between positions, while improving tactile feel.

The V-Series Rotary also features an innovative PC board that supports the LED and surface mount resistors; and IP67 sealing protection above panel by utilizing LED and actuator stem seals. Together, these features make the V-Series Contura Rotary switch the best choice available in the market today.



Resources:

Download 3D CAD Files

[IGS >](#) [STP >](#)

Watch Product Video



Product Highlights:


- ♦ Accommodates up to three separate LEDs
- ♦ Patented mechanism translates rotary into linear motion
- ♦ Secondary CAM for definitive detent positions
- ♦ PC Board supports LED and surface mount resistors
- ♦ IP67 sealing protection above panel
- ♦ Common terminal & circuit functionality with V-Series Rocker switches, with no harness change required

Typical Applications:

- ♦ On/Off Highway Equipment
- ♦ Marine
- ♦ Test & Measurement
- ♦ Instrumentation
- ♦ Speed Control

V-Series Rotary Switch

DESIGN FEATURES

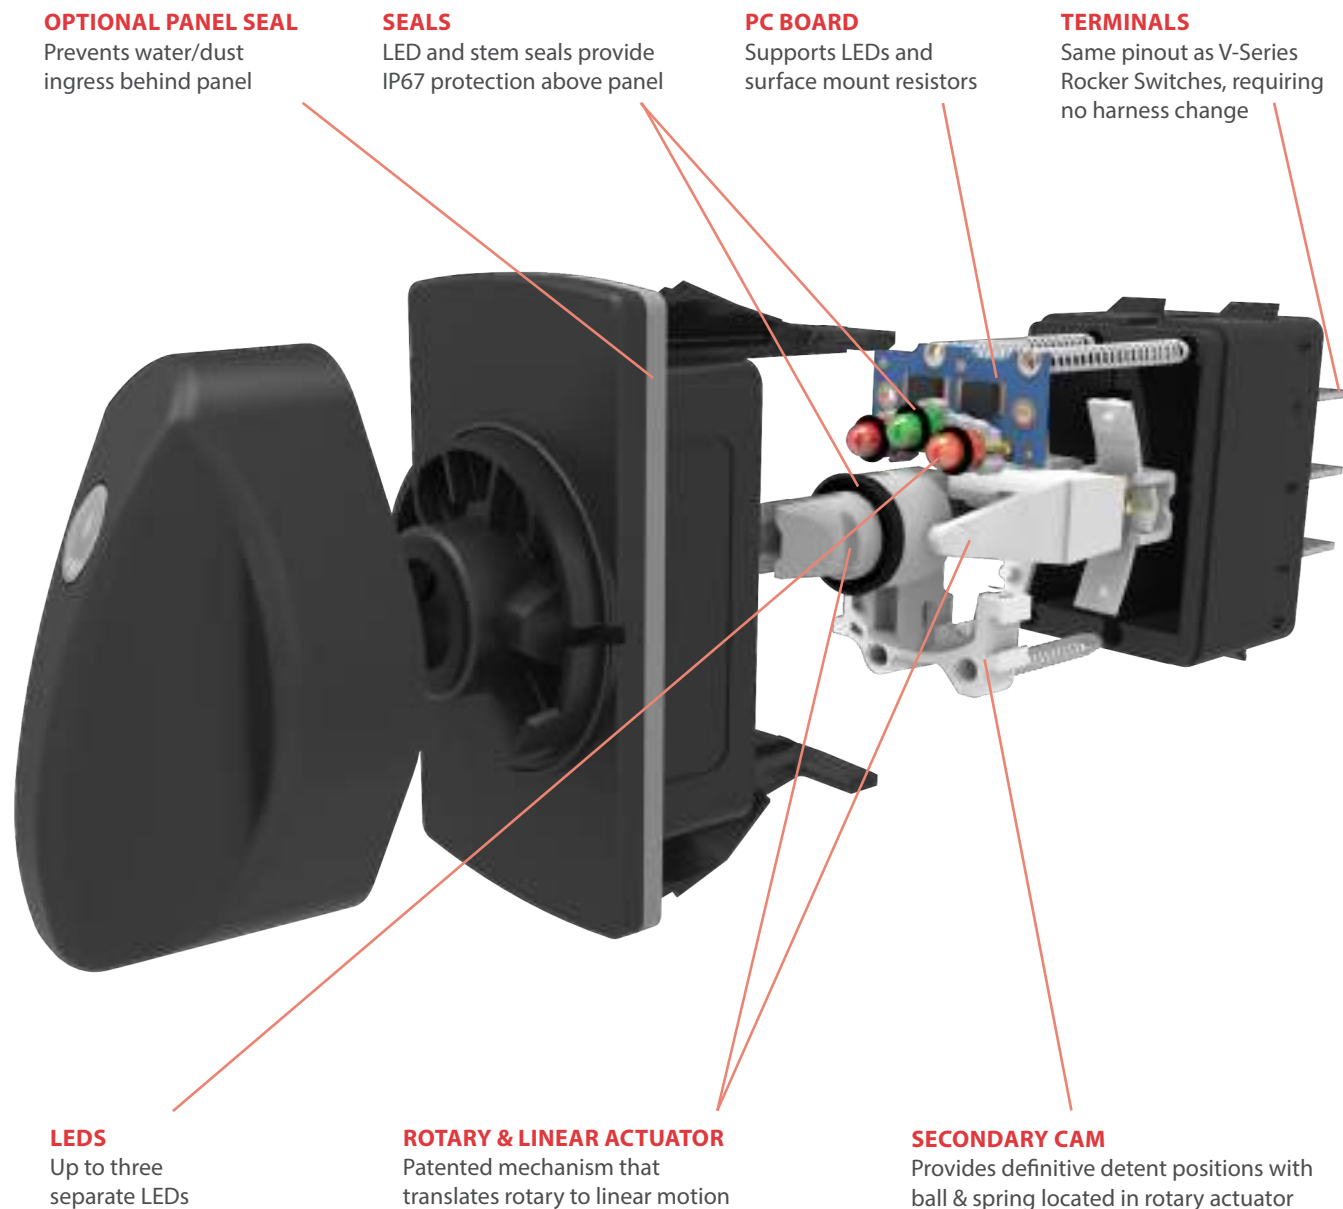

Electrical

Rating

Circuit	Voltage	Max Current Resistive
2 Position Maintain	12	20
2 Position Momentary	12	20
3 Position All	12	20
2 Position Maintain	24	15
2 Position Momentary	24	15
3 Position All	24	15

Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 Milli Ohm max @ 4VDC
Life	50,000 Cycles Two Position 25,000 Cycles Two Position Momentary and All Three position
Terminals	0.250" (6.3mm) Quick Connect

Physical

Function Circuits	Double Pole Single Throw, DPST Double Pole Double Throw, DPDT
Operation	Two and Three Position Maintained and Momentary
Knob Rotation	Two Position 60 Degrees Three Position 30 Degrees from Center
Illumination	LED; Red, Green, Amber, Yellow, White, Blue
Seals	LED O-ring(s) – Silicone, Bezel gasket – Neoprene, Knob seal - NBR
Flammability	Exceeds FVMSS 302 Requirements, Exterior Components, UL 94 V-2 or Better Interior Components, UL 94 HB or Better
Base	Polyester, PBT
Bracket	Nylon 66, PA
Knob	Polybutylene Terephthalate, PBT 6.5%GF
Lens	Polycarbonate, PC
Connector	Nylon 66, PA
Mounting	Front Panel Snap In, 1.450" (36.83mm) X 0.830" (21.08mm) Panel Thickness, 0.030" – 0.187" (0.76 – 4.75mm)

Mechanical

Mechanical Life	100,000 Cycles Maintained Circuits 50,000 Cycles Momentary Circuits
Knob Impact	50 Gram weight dropped from a height of 18 inches on Top & Sides

Environmental

Sealing	IP67, in accordance with IEC 60529, BS 5490, DIN 40050 & NFC 20 010. This rating applies to front panel components of the actual switch only, and signifies protection against dust and the prolonged effects of immersion under pressure.
Dust	Mil STD 810, Method 510.2 Air Velocity 300 Ft/Min Duration 16Hr
Corrosion	IEC 68-2-60 Mixed Flowing Gas (MFG) 14 Days
Chemical Splash	Gasoline, Diesel, Motor Oil, Brake Fluid, Ammonia, Armour All
Salt Spray	Mil STD 202G, Method 101, Test Condition A 96 Hr
Vibration Random	Mil STD 202G, Method 214 test Condition C 10G's RMS
Vibration Sinusoidal	Mil STD 202G, Method 204D, Test Condition A 0.06DA or 10G's 10-500Hz
Shock	MIL-STD 202G, Method 213B Test Condition K, 30G's
Handling Shock	1 Meter Drop onto Hard Surface
Thermal Shock	MIL-STD 202G, Method 107G Test Condition A -55 C to 85 C
Moisture Resistance	MIL-STD 202G, Method 106F 10, 25 C to 65 C Cycles 95% RH
Thermal Cycling	25 Cycles -40 C to 85 C
Ignition Protection	ISO 8846 with EC Directive 94/25/EC for Marine Products
UV Protection	300 hr Xenon Arc, 1.4W/m2 wavelength 420 nm
ESD	Human Static Discharge, +/- 15KV applied during normal operation Shipping/Handling, frequency range 200-2000 MHz applied voltage is +8KV to +15KV and -8KV to -15KV 3 discharge cycles

RV	21	D	2	B	6	0	0	B	-	K	R	C
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp 1	7 Lamp 2	8 Lamp 3	9 Bracket	10 Actuator	11 Lens	12 Knob Color	

1 SERIES

RV Rotary Contura

2 CIRCUIT ¹

Terminal Connections as viewed from bottom of switch: () - momentary

8 - -7 DP - double pole uses 1, 2, 3 and 4, 5, 6.
 1 - -4
 2 - -5
 3 - -6
 10 - -9

Position:	1	2	3
21	2 & 3, 5 & 6 ON	Connected Terminals NONE	1 & 2, 4 & 5 OFF
22	(ON)	NONE	OFF
23	ON	NONE	(OFF)
24	ON	NONE	ON
26	ON	OFF	ON
28	(ON)	OFF	(ON)

SPECIAL CIRCUITS

55	(ON)	OFF	ON
61	2 & 3, 5 & 6	2 & 3, 4 & 5	1 & 2, 4 & 5
62	2 & 3, 5 & 6	2 & 3	OFF
64	(2 & 3, 5 & 6)	2 & 3	OFF

3 RATING

1 .4VA 28VDC Resistive
 B 15A 24V
 D 20A 12V

4 TERMINATION / BASE STYLE

8 Term	10 Term	Termination	Jumper
1	2	.250 TAB (QC) - no barriers	No
A	B	.250 TAB (QC) - with barriers	No
J 4, 5	K 4, 5	.250 TAB (QC) - no barriers	Yes (T2 to T5)

Notes:

- Switch circuit uses terminals 1,2,3,4,5 & 6. Terminals 7,8,9 & 10 are for lamp circuit only.
- Jumper between terminals 2 & 5 for Circuits 61, 62, & 64 to be specified in the Termination & Jumper selection.
- Circuit 61 may be used for SP, OFF-ON-ON circuit.
- Base will not have terminal insulating barriers when connector and/or jumpers are used.
- Code J,K are optional for circuits 62 and 64. Customer may provide externally wired jumper to connect terminals 2 and 5.
- Lamp #1 located at top end of switch, above terminal 4.
Lamp #2 located at top end of switch between terminals 1 & 4.
Lamp #3 located at top end of switch, above terminal 4.
Positive (+) and negative (-) symbols apply to L.E.D. lamps only.
- Mounting hole size is 1.450" (36.83mm) by 0.830" (21.08mm). To mount multiple switches in single panel cut-out order optional interlocking mounting panels.
- Lens color for L.E.D.s must be clear, white, or match color of L.E.D.

5 ILLUMINATION ^{6, 8}

Sealed	Lamps	when illuminated	Terminals
S	NONE		
A	# 1	Independent	8+ 7-
B	# 1	Dependent	3+ 7-
C	# 1	Independent	8+ 7-
D	& # 3	Independent	10+ 7-
E	# 1	Dependent	3+ 7-
F	& # 3	Dependent	1+ 7-
G	# 1	Independent	8+ 7-
H	# 2	Independent	9+ 7-
J	# 1	Independent	10+ 7-
K	# 2	Dependent	3+ 7-
L	# 1	Dependent	1+ 7-
M	# 2	Independent	3+ 7-
N	# 2	Independent	8+ 7-
P	# 3	Independent	10+ 7-
R	# 3	Dependent	1+ 7-
T	# 3	Dependent	8+ 7-
			1+ 7-

6, 7, 8 LAMP #1, 2 AND OR LAMP #3 ^{6, 8}

Selection 6: above terminal 7; Selection 8: above terminal 8

No lamp	0				
LED	Red	Amber	Green	Blue	White
12VDC	C	N	H	E	6
24VDC	D	P	J	K	8

9 BRACKET COLOR & PANEL SEAL ⁷

Color	No Gasket	1 Gasket	2 Gasket
Black	B	C	D
Gray	G	H	J
White	W	Y	Z

10 ACTUATOR STYLE

K Rotary Knob (Standard)



ACTUATOR ORIENTATION
ABOVE TERMINALS**11 LENS COLOR ⁸**

No Lens	Z				
Clear	White	Amber	Green	Red	Blue
4	9	E	K	R	W


12 KNOB COLOR

Black	Gray	Red	White
C	H	S	Y


Dimensional Specifications: in. [mm]




**10 TERMINAL BASE
W/ BARRIERS**

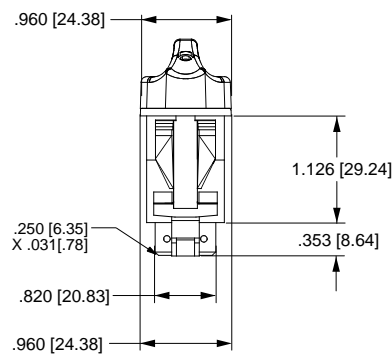

**10 TERMINAL BASE
W/O BARRIERS**









**BOTTOM VIEW
TERMINAL ARRANGEMENT
10 TERMINAL BASE**




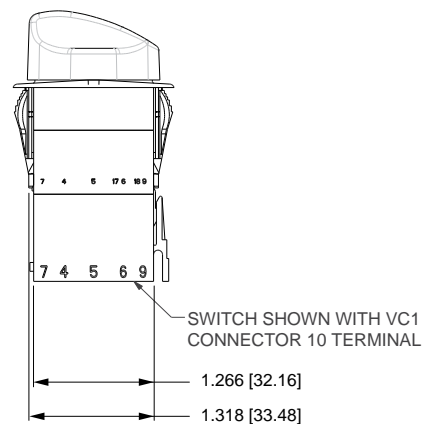


Circuits Diagrams:

KNOB POSITIONS

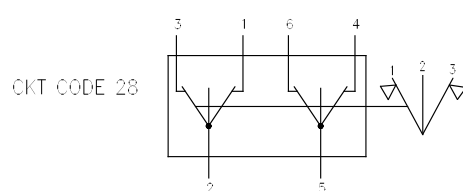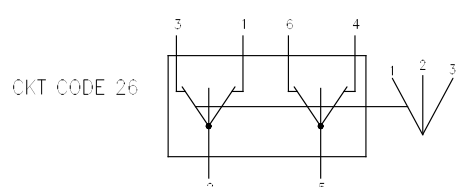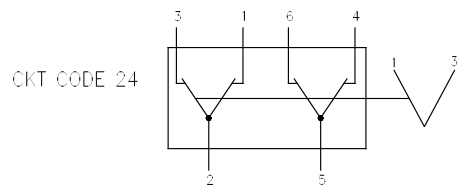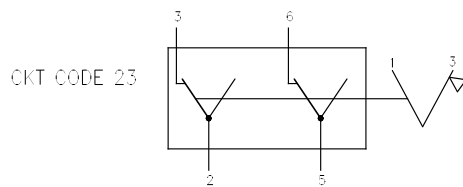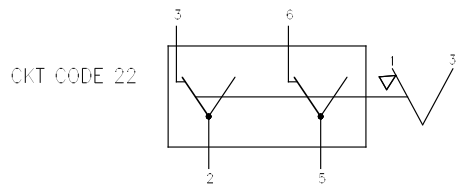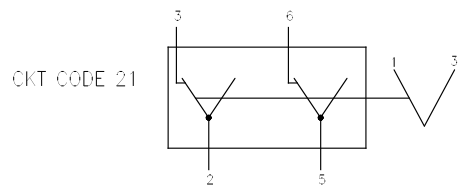

KNOB POSITIONS

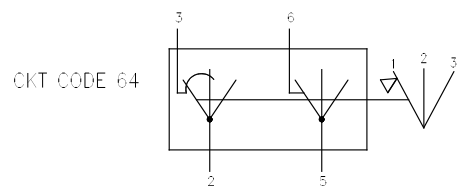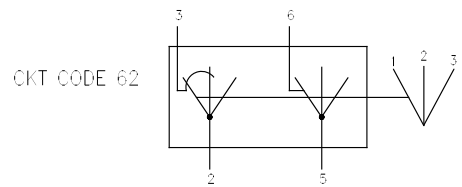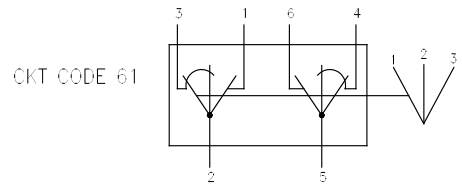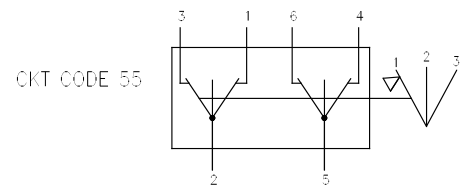

LEGEND

SYMBOL	DEFINITION
	TERMINAL LOCATION
	MAINTAINED CIRCUIT
	MOMENTARY CIRCUIT
	INTERNAL CONNECTION (JUMPER TERMINAL)
	2 POSITION CONNECTION
	2 POSITION CONNECTION
	2 POSITION
	3 POSITION

Lamp Circuit Diagrams:

LAMP CIRCUIT	CIRCUIT DIAGRAM
A	
B	
C	
D	
E	
F	
G	
H	
J	
K	

LAMP CIRCUIT	CIRCUIT DIAGRAM
L	
M	
N	
P	
R	
T	

V-Charger

V-SERIES DUAL PORT USB 2.0 CHARGERS

Carling Technologies USB V-Charger is designed to charge tablets, e-readers, mobile and gaming devices, digital cameras, as well as other compatible electronic devices.

Providing a total current of 3.15 amps, the V-Charger delivers fast charging times even in extreme temperatures from -40°C to +80°C. This innovative product safeguards its electronics with integrated over-current and thermal overload protection, as well as optional load dump circuitry, assuring prolonged safe and reliable operation. The center LED indicates charging is in progress. Snap-in mounting for an industry standard 1.450" x .830" panel cutout makes installation easy.

*Additionally, the V-Charger's double torsion spring-loaded access doors automatically close and provide effortless IP64 sealing protection with precision-fit silicone rubber seals.



Resources:

Download 3D CAD Files

[IGS >](#)

[STP >](#)

Watch Product Video



Product Highlights:

- ♦ Dual USB Charging Ports
- ♦ 3.15 Amps for Faster Charging
- ♦ 10,000 Operating Cycles per Port
- ♦ IP64 Sealing Protection
- ♦ 12-24 V Operating Voltage
- ♦ Protection for Internal Components

Typical Applications:

- ♦ On/Off-Highway Equipment
- ♦ Golf Carts
- ♦ Lawn & Garden Equipment
- ♦ Marine
- ♦ Military

V-Charger

DESIGN FEATURES

DUAL USB 2.0 PORTS

Total current of 3.15 amps, facilitating faster charges

SPRING LOADED DOORS

Stylish, wing-shaped double doors automatically close to cover and seal each port when not in use

LED

Green LED brightens to indicate charging is in progress



SEALING PROTECTION

Silicone rubber seal perfectly mates with door indent to provide IP64 level of sealing protection

PANEL SEAL

Prevents water ingress beneath panel to protect critical connections

MOUNTING

Fits industry standard panel opening size of 1.450" x .830"

Electrical

USB Type	2.0
Number of USB Ports	2
Operating Voltage	12V/24V DC power systems (9 to 29 VDC)
Output Voltage	5 VDC \pm 5%
Max Output Current	3.15A DC Total
Current Draw (No Load)	12V: 0.8 mA, 24V: 1.9 mA
LED Indicator	Green LED brightens when charging is in progress.
Compatibility	Charges mobile devices including iPad, iPhone, iPod, HTC, Galaxy, Blackberry, MP3 Players, Digital Cameras and PDA's
Life	10,000 operating cycles per port minimum
Terminals	Copper/silver plating 1/4" (6.3 mm) Quick Connect terminations
Reverse Polarity	Operational with correct polarity after reverse polarity exposure
ESD	15kV air, 8 kV touch
Overcurrent Protection	Short Circuit
Thermal Overload Protection	Operation will cease if internal temperature reaches 125°C. Charging will resume after sufficient heat loss

Physical

Panel Opening	1.450" x .830"
Panel Thickness	.030 - .156 inches
Panel Mounting Method	Front Panel Insertion
Seals	Silicone and Poron
Depth Behind Panel	See Figures 1 and 2
Connection	VC1, VC2
Weight	55g (0.12 lbs)
Styling	Curved USB port doors
Port Protection	Twin, self-closing doors

Environmental

Sealing	IP64 for front panel components when USB Ports are covered
Operating Temperature	-40° to +60°C at 3.15A -40° to +70°C at 2.4A -40° to +80°C at 2.1A
Vibration 1 Test	Mil-Std 202G, Method 204D, Condition A. 0.06DA or 10G, 10-500 Hz
Shock Test	Mil-Std 202G, Method 213B, Condition K @ 30-G. No loss of circuit during test.
Chemical Splash	Brush method with USB doors closed: diesel, gasoline, brake fluid, Windex, Armor All
Thermal Shock	MIL-Std 202F, Method 107D, Test Condition A, -55° to +85°C. Test Criteria: Remains functional without damage
Moisture Resistance	Mil-Std 202G, Method 106G. Test Criteria: Remains functional without damage
Thermal Cycling	25 Cycles -40° to +85°C, 2 hours for each temperature every cycle
Salt Spray	Mil-Std 202G, Method 101E, Test Condition A
Dust	Mil-Std 841C Method 510.2 Air Velocity 300 \pm 200 Ft/min, test duration: 16 Hr

Mechanical

Endurance	10,000 door cycles minimum
-----------	----------------------------

Ordering Scheme

V	-	USB	-	24	-	G	1	1	-	1	B	B	1
1 Series		2 Product Type		3 Source Voltage		4 LED Indicator	5 Circuit Protection	6 Termination		7 Door Style	8 Door Color	9 Base Color	10 Panel Seal

1 SERIES

V

2 PRODUCT TYPE

USB Charger

3 SOURCE VOLTAGE

24 24 / 12 Volts DC

4 LED INDICATOR (VOLTAGE MATCHES SOURCE)

G Green

5 CIRCUIT PROTECTION

1 Reverse Polarity, Thermal Overload & Overcurrent

6 TERMINATION

1 .250 Tab

7 DOOR STYLE

1 Curved

8 DOOR COLOR

B Black






9 FRAME COLOR

B Black

10 PANEL SEAL

1 Yes

Dimensional Specifications: in. [mm]

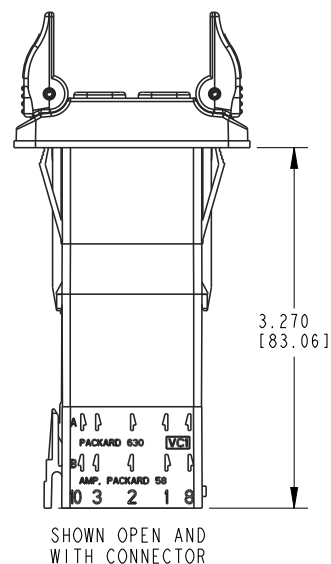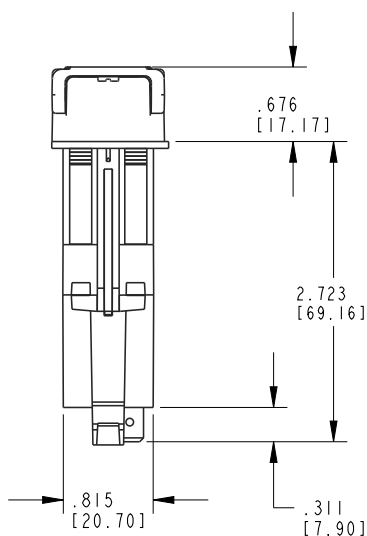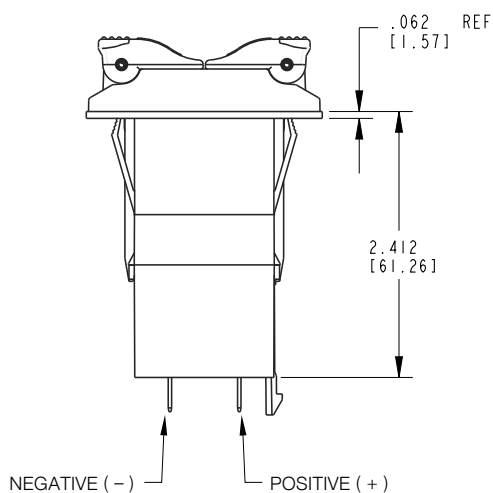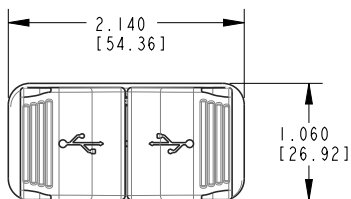

Notes:

- Charger to install into 1.450" X 0.830" panel opening

Reduce inventory levels and cost by stocking actuators and base switches separately.**Contura II, III, IV, V, VI, VII, X, XI, XII, XIV Base switches separately:** specify **V** with code selections 2-8 in the ordering schemes.**Contura II, III, IV, V Actuator only:** **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.**Contura VI Actuator with lenses and inserts only:** **VV** with code selections 9-16**Contura II, III, IV, V, VII Actuator only:** **VV** with code **A, C, E, G, P** or **Z** for selection 9 & with selections 10-14 in the ordering schemes.**Contura X, XI, XII, XIV actuators with lenses separately:** **VV** with code selections 9-14 in the ordering schemes.**Panel Seal:** VPS**Contura X & XI actuators without lenses separately:**

VVR	6	1	00	1
-----	---	---	----	---

1 Actuator Separately	2 Actuator Style/Color	3 Lens Opening	4 Actuator Legend	5 Legend Orientation
--------------------------	------------------------------	----------------------	-------------------------	----------------------------

1 CONTURA X & XI ACTUATOR SEPARATELY
VVR**2 ACTUATOR STYLE & COLOR**

	Black	Gray	White	Red
Contura X	1	2	3	4
Contura XI	6	7	8	9

3 LENS OPENING FOR ¹

1 One bar lens	5 square lens on top/ bar lens on bottom (Contura X only)
2 One bar lenses	
3 One square lens	
4 two square lens	


4 ACTUATOR LENS OR BODY LEGEND

00 - No Legend this location

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F	F	

For additional legend options & codes, visit us at www.carlingtech.com.**5 LEGEND ORIENTATION ¹**

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4

**Contura X, XI & XII top piece of 2-piece lens separately:**

VVT	1
-----	---

1 Lens Separately	2 Color
----------------------	------------

1 TOP OF LENS SEPARATELY
VVT**2 COLOR**

1 Clear 2 Smoke 3 White

Contura X, XI & XII actuator lens assembly:

1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

Notes:

- If actuator lens opening for 2 bar or 2 square lenses, legend orientation 0,1, or 2 must be chosen.
- Center of actuator marking not available for Contura XII.
- Legend is not available for bar style lens.
- Not recommended with neon lamps.
- Must also order top piece of 2 piece square lens separately.

Contura XII actuators without lenses separately:

VVP	J	1	Z	21	1	00
-----	---	---	---	----	---	----

1 Actuator	2 Style & Color	3 Lens Opening	4 Lens Opening	5 Legend	6 Legend Orientation	7 Legend Orientation
---------------	-----------------------	----------------------	----------------------	-------------	----------------------------	----------------------------

1 CONTURA XII ACTUATOR SEPARATELY
VVP**2 ACTUATOR STYLE & COLOR**

J Black K Gray N White M Red

3,4 LENS OPENING FOR


Z No lens 1 Bar lens 2 Square lens

5, 7 LENS OR BODY LEGEND ²

00 - No Legend	21 OFF	22 ON	23 O	24 I
	25 O F	26 O N	27 O	28 I

For additional legend options & codes, visit us at www.carlingtech.com.**6 LEGEND ORIENTATION ³**

0 No legend
1 Orientation 1
2 Orientation 2

**Contura X, XI & XII actuator lens assembly separately:**

VVL	2	1	00	0
-----	---	---	----	---

1 Lens Separately	2 Lens Style	3 Lens Color	4 Legend	5 Legend Orientation
----------------------	--------------------	--------------------	-------------	----------------------------

1 CONTURA X, XI & XII LENS SEPARATELY
VVL**2 LENS STYLE ³**


1 Bar lens
2 One Piece Square lens
3 Bottom of Two-Piece Square lens ⁵

3 TRANSLUCENT LENS COLOR1 Clear 2 White 3 Amber 4 Green ⁴ 5 Red 6 Blue ⁴**4 LENS OR BODY LEGEND ²**

00 - No Legend	21 OFF	22 ON	23 O	24 I
	25 O F	26 O N	27 O	28 I

For additional legend options & codes, visit us at www.carlingtech.com.**5 LEGEND ORIENTATION ³**

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





Easily integrate Contura products into your system, with Contura Accessories


Contura Connectors

Q.C. SELECTION GUIDE					
COMPANY SERIES	PART NO		WIRE RANGE		ORIENTATION
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM ² (REF)	
PACKARD 58 SERIES	02965580		12	3.0	B
	02965471	12010601	(2)16-14	(2)1.0-2.0	
	02965470		16-14	1.0-2.0	
	02965469	06288318	20-18	.5-.8	
PACKARD METRI-PACK 630 SERIES		12084590	10	5.0	A
		12052224	12	3.0	
		12015870	16-14	1.0-2.0	
		12020035	(2)22-18	(2).5-.8	
	12015832	12015869	20-18	.5-.8	
		12052222	20-22	.35-.5	
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B
	42100-1	42100-2	(2) 16	(2) 1.3	
			18-14	.8-2	
	60295-1	60295-2	22-18	.3-.9	


NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability.
AMP is a registered trademark of AMP Inc. Harrisburg, PA
Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warren, Ohio

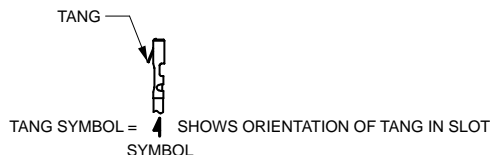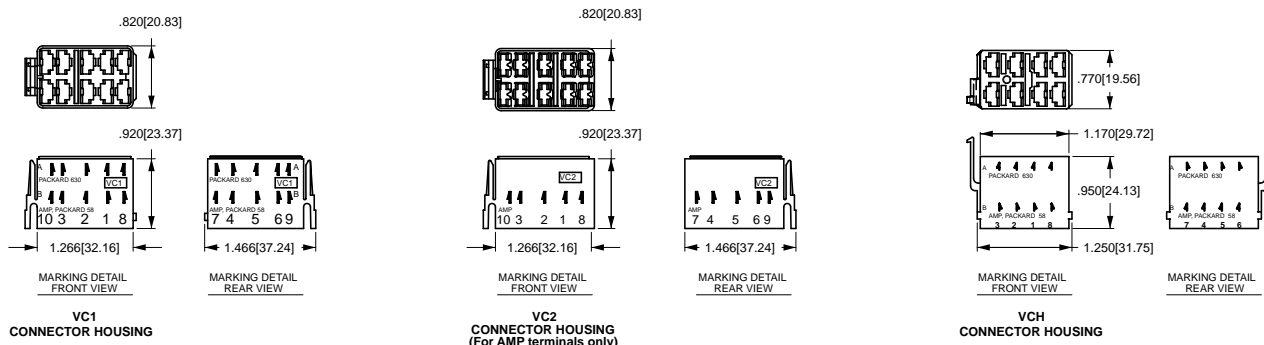

Contura X Boot (P/N VB1-01)

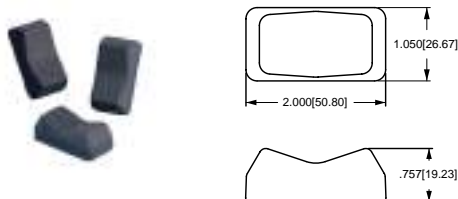

Contura II, III, IV & V Actuator Removal Tool (P/N VRT)

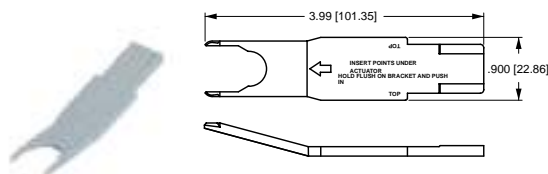

Additional V-Series Ratings

- | | |
|----------------|--|
| 1 | .4VA @ 28VDC Resistive |
| 4 | 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings |
| 5 ¹ | 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified |
| 6 ² | 15A 125VAC 1/2 HP, 12(2)A 125 VAC μ T85 |
| 7 ² | 15A 125VAC 1/2 HP, 12(6)A 125 VAC T85 |
| 8 ² | 10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(2)A 250 VAC μ T85 |
| 9 ² | 10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(6)A 250 VAC T85 |
| B | 15A 24V |
| C | 20A 18V |
| D | 20A 12V |
| E | 20A 14V, 10A 14VT (circuits 1, 4, A, & D only) |
| F | 10A 14V, 6A, 14VT (circuit G only) |
| G | 20A 6V |
| H | 20A 3V |
| L | 15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L |
| M | .4VA/20A 12V (combi-contact) |
| | (combination gold/silver contacts for borderline dry circuit applications) |
| N | .4VA/15A 24V (combi-contact) |
| | (combination gold/silver contacts for borderline dry circuit applications) |

NOTES


Consult factory to determine availability for individual circuits and their HP rating.

- Not available with Contura 7 or 14 rocker styles.
- Ratings 6 - 9 are UL, CSA & VDE certified, require terminations A or B for double pole circuits, & are not available with illumination circuits 4, 8, D, J, N, & T or with wire lead or solder lug terminations.

Circuits 1, 4, A, D, H, M & E are not available with rating 6 & 8. Rating 7 & 9 only available with circuits 1, 4, A & D. Circuits 2, 3, 5, 7, 8, K, L are 1/2 HP 250VAC only with rating 8. Ratings 6 & 7 must specify lamp code 1 (125VAC neon). Ratings 8 & 9 must specify lamp code 2 (250VAC neon). Rating L available with circuits 1, 4, A & D only.


Contura Mounting Panels

Dimensional Specifications: in. [mm]

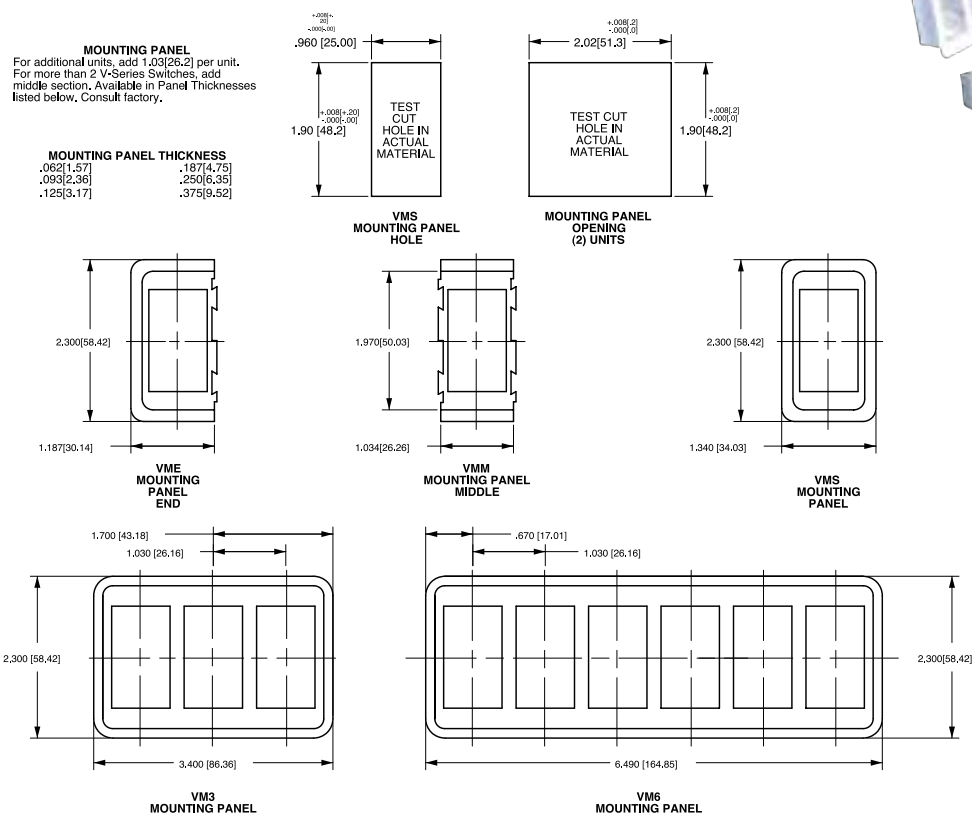

Contura Hole Plug

Dimensional Specifications: in. [mm]

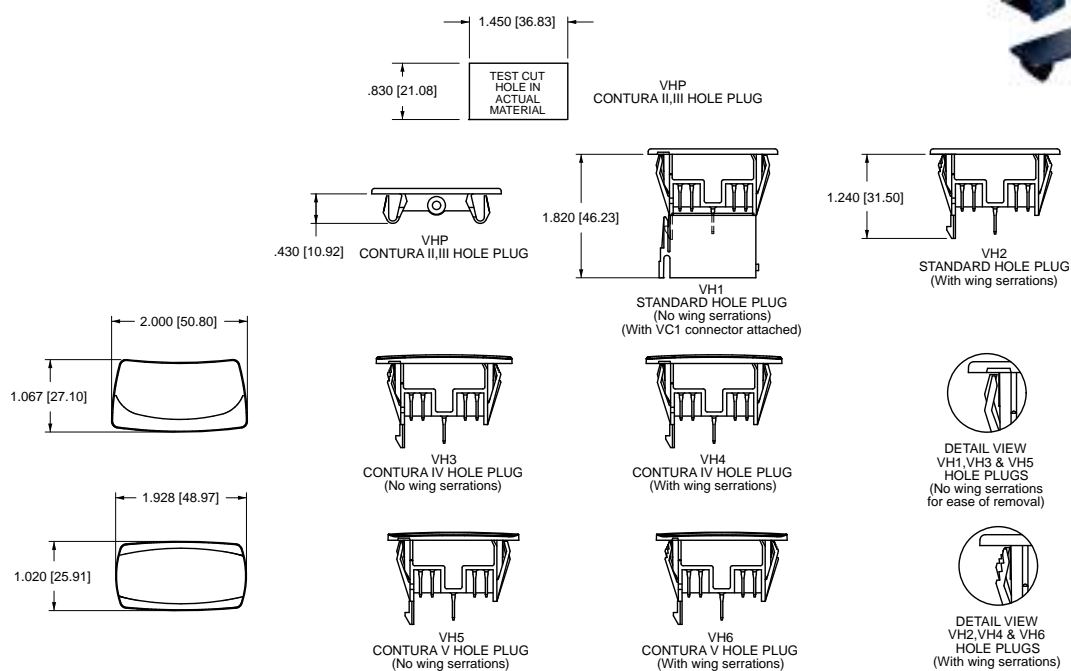

VP-Series

CONTURA ILLUMINATED INDICATORS

The Illuminated Indicator is offered with removable/replaceable lamps, Contura styling, and LED illumination. As a critical safety feature, it's illumination alerts the operator of essential system functions or malfunctions like: oil pressure, high temperature, transmission or other fluid levels, parking brake, or general system malfunction. Three different style housings (flush, raised panel, oval) assure seamless integration with Contura switches and into most any dashboard panel.



Product Highlights:

- ♦ 3 Styles to choose from
- ♦ Single or double window Illumination
- ♦ 25 lens colors and configurations
- ♦ Available connector for easily installation

Typical Applications:

- ♦ Transportation



VP	1	6	6	-	B	1	1	K	K	-	00	0	00
1 Series	2 Termination	3 Lamp	4 Lamp		5 Housing Color	6 Lens Design	7 Lens Design	8 Lens Color	9 Lens Color		10 Legend	11 Legend Orientation	12 Actuator Legend

1 SERIES

VP Illuminated plug
H2 1 Housing only
H3 2 Lamp module only
HP1-01 VP connector for oval and flush bezel only
VC1-01 VP connector for raised bezel only

2 TERMINATION

1 .250 TAB

3,4 LAMP (same coding for both selections) 4,5,6,8,9,12

No lamp 0
 Neon 1 125VAC 2 250VAC
 Incandescent 3 24V 4 6V 5 12V 6 18V
 LED* 7
 2VDC L Amber F Green R Red
 6VDC M G S
 12VDC N H T
 24VDC P J V
 *Typical current draw for LED is 20ma.

5 HOUSING COLOR

	flush bracket	raised bracket 13	oval bezel (Contura V)
Black	B	6	1
Gray	W	-	2
White	R	5	3
Red	G	-	4

6,7 SQUARE LENS DESIGN (same coding for both selections) 4,5,6,11,12

Z no lens
1 transparent diamond square 10
2 translucent square 7
3 laser etched 10
4 transparent oval
5 translucent oval

8, 9 LENS (same coding for both selections) 3,4,5,6,9

Z	No Lens	White	Amber	Green	Red	Blue	Lens Style
4	9	E	K	R	W		One piece Square/Oval 11
5	A	F	L	S	Y		Two piece Square* (with clear top protective lens)
2	7	C	H	N	U		Two piece Square* (with smoke top protective lens)
1	6	B	G	M	T		Two piece Square* (with white top protective lens)


*All bottom lenses are molded of opaque material. Consult factory for other lens colors.

10 LAMP #1 LENS OR BODY LEGEND 5

00 No legend
 For legend options, visit us at carlingtech.com

11 LEGEND ORIENTATION

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4










12 LAMP #2 LENS OR BODY LEGEND 5

00 No legend
 For legend options, visit us at carlingtech.com


Notes:

- To order housing with lenses only, specify H2 followed by fields 5-12. (flush bezel only)
- To order lamp module only, specify H3 followed by fields 2-3. (flush bezel only)
- Two piece lens not available with oval bezel.
- If only 1 lamp, specify 0 in selection 4 and Z in selections 7 & 9.
- Lamp and lens #1 located over terminals 1A and 1B for flush & oval bezel.
- Lamp and lens #2 located over terminals 2A and 2B for flush & oval bezel.
- Available with 2 piece lens option only.
- Neon lamps not recommended with blue or green lenses.
- Green or blue lenses not recommended with neon lamps.
- Available with one piece lens option only.
- Oval bezel available with oval lens only. Oval lens available with oval bezel only.
- Lamp & lens #1 located over terminals 7 & 8, & #2 located over 9 & 10 for raised bezel option.
- Both bracket and insert will be same color. For white bracket with black insert, specify 7. For black bracket with white insert, specify 8.

Dimensional Specifications: in. [mm]

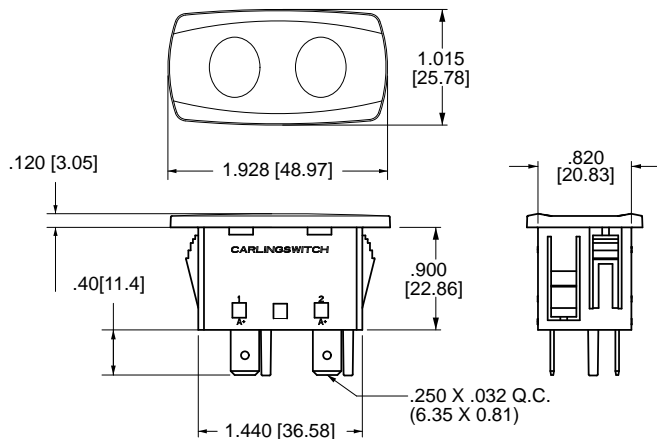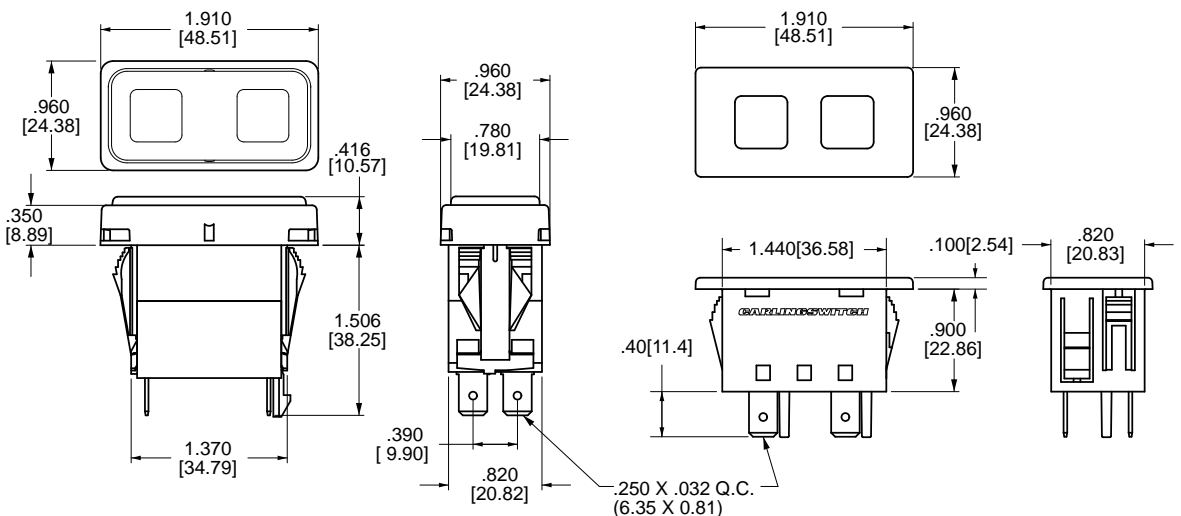

ILLUMINATED PLUG MOUNTING HOLE (OVAL, FLUSH AND RAISED BEZELS)

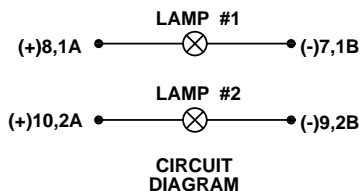

(OVAL, FLUSH AND RAISED BEZELS) MOUNTING PANEL THICKNESSES:

.062 [1.57]	.250 [6.35]
.093 [2.36]	.375 [9.52]
.125 [3.17]	.500 [12.70]
.187 [4.75]	

Notes:
Oval and flush bezel styles use terminals 1A, 1B, 2A, 2B. Raised bezel style uses terminals 7, 8, 9, 10.

W-Series

SEALED ROCKER SWITCHES

Carling Technologies set the standard for performance and aesthetics with the widely successful, often imitated, but never duplicated, V-Series rocker switches. Building further upon that platform, Carling has once again raised the bar with the fully sealed W-Series. The W-Series' traditional appearance features complete IP68 protection, including below the panel, where the critical connection is made from the wiring harness. When used in conjunction with the integrated connector, the totally submersible W-Series provides a seal for up to ten individual wires, assuring compatibility with even the most complex circuitry.

The W-Series also offers a wide variety of accoutrements, including endless illumination options featuring dual level and multicolor LEDs, progressive and hazard warning circuits, ratings up to 10A 24V, choice of paddle, rocker, locking or laser etched actuators, hundreds of standard legend choices and the electrical performance and reliability that is the hallmark of Carling Technologies products.



Product Highlights:

- ♦ Fully sealed and submersible
- ♦ IP68 protection, including below the panel
- ♦ Tri-seal design
- ♦ Connector with twin locking tabs

Typical Applications:

- ♦ Marine equipment
- ♦ ON/OFF Highway equipment



W-Series Switch


DESIGN FEATURES

ILLUMINATION

Choice of highly reliable SMT LED or incandescent lighting with 21 dependent or independent circuit options.

TRI-SEAL DESIGN

Sealing at actuator, an insert molded neoprene base seal, along with wire lead seals, assures water tight, fully submersible protection.

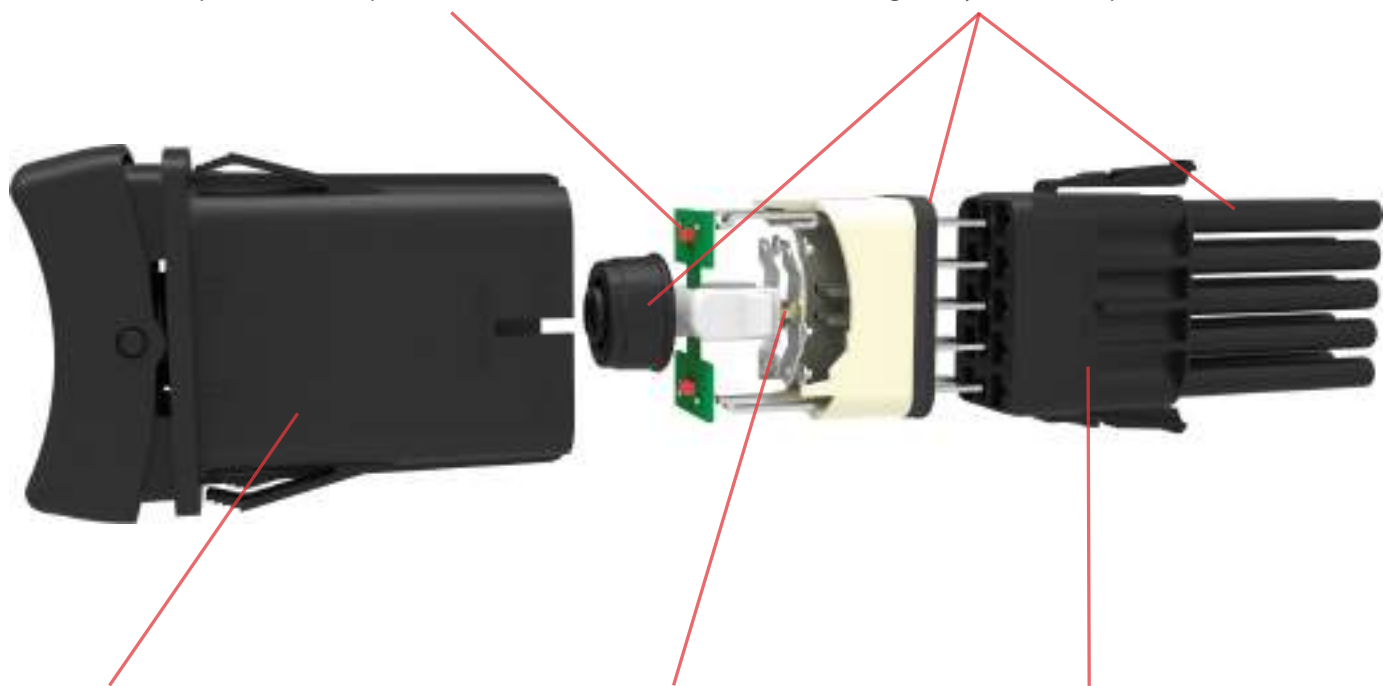

BODY

One piece polyester 94V0 seamless body acts as an umbrella to protect critical internal components.

ROLLER PIN

Proven reliable mechanism is lubricant free and allows for 100k electrical and 250k mechanical cycles, and withstands extreme temperatures from -40°C to +85°C.

INTEGRATED CONNECTOR

Accommodates Tyco/Amp .110 junior power timer contacts with twin locking tabs to provide a safe, secure, sealed connection.

Electrical

Contact Rating	.4VA @ 24VDC 10 amps, 3-24VDC
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megaohms
Initial Contact Resistance	10 milliohms max. @ 4 VDC
Life	100,000 cycles
Contacts	Silver tin-oxide, 88/12
Terminals	Copper with silver or gold plating
Quick Connect terminations.	
Voltage	3-24 VDC
Overcurrent	15A for 50 cycles

Mechanical

Endurance	250,000 cycles minimum
-----------	------------------------

Physical

Lighted	LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24 VDC)
Seals	Neoprene
Base	Polyester blend rated to 125C with a UL flammability rating of 94V0.
Actuator	Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay.
Lens	Polycarbonate rated at 100°C
Function	2 & 3 Position Rocker Style
Operation	Maintained & Momentary
Base	PA 6/6 30GF (glass filled)
Actuator	PA 6/6 13GF
Bracket	PBT 10GF
Connector	PBT 10GF, polarized

Actuator Travel (Angular Displacement)

24° full throw


Environmental

Environmental	IP68, Fully sealed
Corrosion/Chemical Splash	Flowing Mixed Gas (FMG) Class III 3 year accelerated exposure per ASTM B-827, B-845 -40°C to +85°C, 22 cycles, 300 hours
Operating Temperature	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz.
Vibration 1	Resonance search 24-50 Hz 0.40 DA 50-2000 ±10 G's peak Results Horizontal Axis 3-5 G's max.
Vibration 2	Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 One meter onto concrete floor Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs.
Handling/Drop	IP6X
Salt Spray	Per Mil-Std 202F, Method 107F, Test Condition A, -55°C to 85°C Test criteria - pre and post test contact resistance
Dust	
Thermal Shock	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance
Moisture Resistance/Humidity	

Mounting Specifications

Panel Thickness Range .032 to .125

For optimum panel fit, the following panel thicknesses are suggested: .032, .062, .093, .125



W	11	D	2	B	C	0	1	-	A	7	Z	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Lens	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES**W****2 CIRCUIT**

Terminal Connections as viewed from bottom of switch: () - momentary
 SP - single pole - uses terminals 1, 2 & 3.
 DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
 Terminals 7, 8, 9 & 10 for lamp circuit only.

8 - 7	10 - 7
1 - 4	1 - 4
2 - 5	2 - 5
3 - 6	3 - 6
10 - 9	

Position:	1	2	3
SP DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
11 21	ON	NONE	OFF
12 22	(ON)	NONE	OFF
13 23	ON	NONE	(OFF)
14 24	ON	NONE	ON
15 25	ON	NONE	(ON)
16 26	ON	OFF	ON
17 27	ON	OFF	(ON)
18 28	(ON)	OFF	(ON)
- 49	ON	ON	ON

3 RATING

B 10A 24V
D 10A 12V
G 10A 6V
H 10A 3V

4 TERMINATION / BASE STYLE**2** .110 TAB (QC)**5 ILLUMINATION**

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

	Lamps	Actuator Lens Position	Lamp Wired to Terminals
	ILLUMINATION	Type	
O	NONE		
A	# 1	Independent	8+ 7-
B	# 1	Down	3+ 7-
C	# 2	Up	3+ 7-
D	# 1	Down	3+ 7-
E	# 1	Up	1+ 7-
F	# 1	Independent	8+ 7-
G	# 1	Up	3+ 6-
H	# 1	Independent	8+ 7-
I	# 2	Up	3+ 7-
J	# 2	Independent	8+ 7-
K	# 1	Independent	8+ 7-
L	# 2	Independent	6+ 7-
Selections for Single Pole Switches Only:			
M	# 1	Down	3+ 6-
N	# 2	Up	3+ 6-
O	# 1	Down	3+ 6-
P	# 2	Down	1+ 4-
Q	# 1	Up	1+ 4-
R	# 2	Up	3+ 6-
S	# 1	Down	3+ 7-
T	# 2	Up	6+ 7-
U	# 1	Down	6+ 7-
V	# 2	Independent	8+ 7-
W	# 1	Independent	8+ 7-
X	# 2	Independent	10+ 9-
Y	# 1	Independent	10+ 9-
Z	# 1 & # 2	Independent in Series	8+ 7-
	# 1 & # 2	Independent in Parallel	8+ 7-

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp 0
 LED*

2VDC	Red	Amber	superbright Green	White
6VDC	A	L	F	4
12VDC	B	M	G	5
24VDC	C	N	H	6
	D	P	J	8

* Consult factory for "daylight bright", blue/green and white LED options.
 Typical current draw for LED is 20ma.

8 BRACKET COLOR ¹**1** Black**9 ACTUATOR ^{1,3}**

3 Black with Laser Etched
A Black

10 LENS - ABOVE LAMP #1 TERMINALS ^{1,4}**11 LENS - ABOVE LAMP #2 TERMINALS ^{3,6}**

0 - No Actuator **Z** - No Lens
 Clear White Amber Green Red Blue

1	-	B	G	M	T	Large Transparent
-	7	C	H	N	U	Large Translucent
3	-	D	J	P	V	Bar Transparent
-	9	E	K	R	W	Bar Translucent
5	A	-	-	-	-	Laser-Etched


Lens color for LEDs must be clear, white, or match color of LED.

12 ACTUATOR LENS OR BODY LEGEND ²**00** - No Legend this location/No actuator

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F		
21	22	23	24
OFF	ON	O	I
25 O	26 O	27 O	28 I
F N	N		

For additional legend options & codes, visit us at carlingtech.com**13 LEGEND ORIENTATION****0** No legend (used with codes 11-18 in selection 12)

1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



**14 ACTUATOR LENS LEGEND ²**

00 No legend this location/no actuator (used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens & one body legend, lens legend must be specified in selection 12; body legend specified in selection 14. For legend options & codes, visit us at carlingtech.com


Notes:

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators; Custom colors are available, consult factory.
- Locking rocker version is also available, consult factory for details.

Dimensional Specifications: in. [mm]

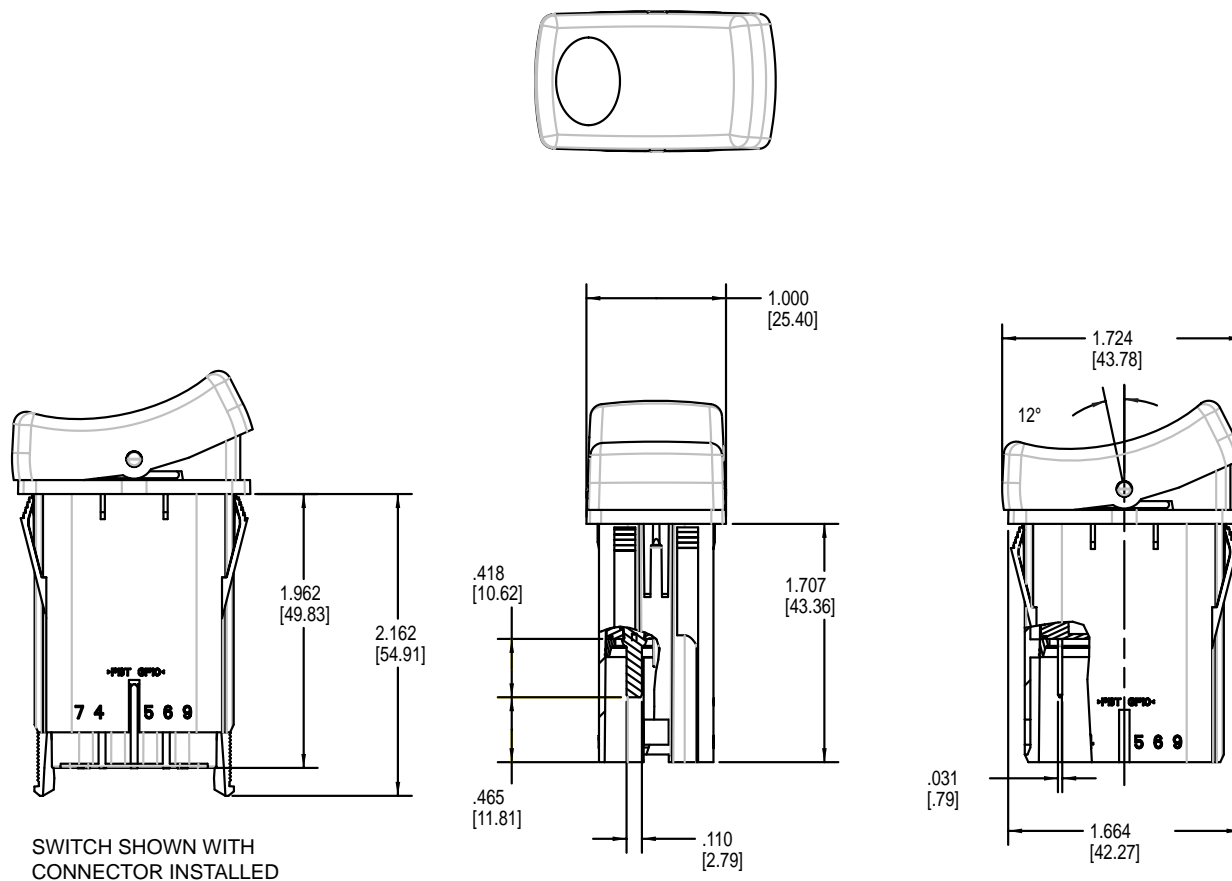

WCH CONNECTOR
(190-31214-001)

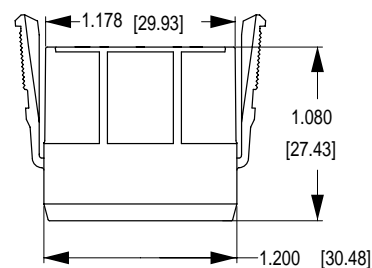

Notes:
WCH connector is intended for use with Tyco/Amp .110 Junior Power Timer, female contacts, and wire seals.
For 14-16 awg wire, specify Tyco/Amp P/N 927766-3
For 16-20 awg wire, specify Tyco/Amp P/N 927770-3
Tyco/Amp cable seal P/N 828904-1 (20-18 awg wire) or P/N 828905-1 (16-14 awg wire) is required for each individual wire lead, and Tyco/Amp cable plug, P/N 828922-1, is required to seal each unused connector opening. Consult Tyco/Amp for the cable seal recommended for your specific wire gauge and thickness.

L-Series

SEALED ROCKER SWITCHES

The L-Series rocker switch is an innovative product offering total design flexibility, while at the same time setting new standards for performance and reliability. Its versatile design features include a neatly proportioned size that fits into an industry standard mounting hole of 1.734 x .867 (44.0mm x 22.0mm), countless unique choices for ratings, circuits, colors, illuminations and laser etched legends. These single or double pole switches also feature a broad choice of actuator styles, colors, and lenses with up to twelve terminals offering an extensive range of switch and lamp circuit options, including LED or incandescent illumination. Additionally, an optional plug-in terminal connector enables pre-wiring of wire harness.



Resources:

Download 3D CAD Files

[IGS >](#) [STP >](#)

Watch Product Video



Product Highlights:

- ♦ IP67 certified sealed front panel components
- ♦ Withstands temperatures from -40°C to +85°C
- ♦ Vibration, shock, thermoshock, moisture and salt spray resistant

Typical Applications:

- ♦ Construction machinery
- ♦ Agricultural equipment
- ♦ On-highway transportation equipment



L-Series Switch

DESIGN FEATURES

LED LIGHTING


Utilize less current and are not affected by vibration, providing long lasting illumination. Available in 3 standard colors.

SEAL PROTECTION

Locks out elements such as water, dust & debris. Certified to IP67 for front panel components.

TERMINALS

Available with 2 industry standard termination options: .250 or .187 tabs with up to 12 terminal options.

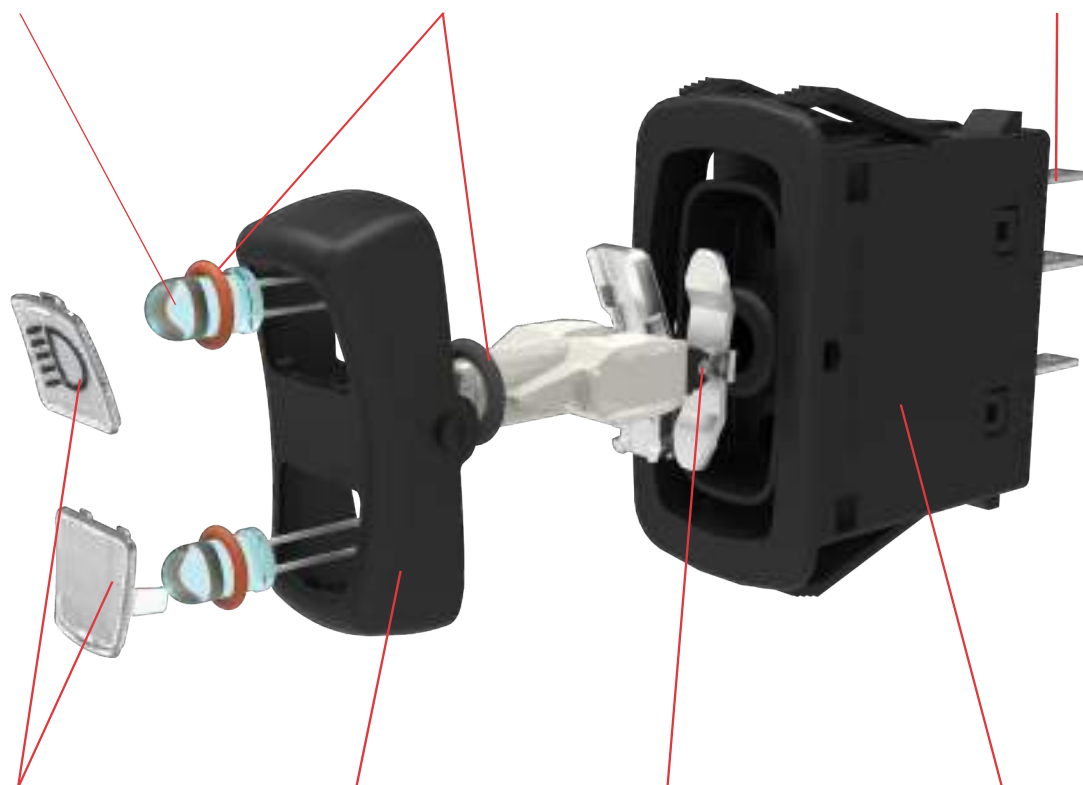

LENS & LEGENDS

Lens available in 2 sizes and 6 standard colors in either translucent or transparent materials. Numerous symbols and text available for imprinting or laser etching.

ACTUATOR

Available in rocker or paddle styles. Several standard color options also available.

ROLLER PIN

Eliminates need for lubricants, increasing the temperature range of the switch from -40° C to +85° C [-40° F to 185° F].

BASE

Fits into industry standard mounting hole of 1.734 x .867 in [44.0mm x 22.0mm].

Electrical

Contact Rating	.4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC
Dielectric Strength	1250 Volts RMS between pole to pole 3750 Volts RMS between live parts and accessible surfaces
Insulation Resistance	50 Megaohms
Initial Contact Resistance	10 milliohms max. @ 4 VDC
Life	100,000 cycles maintained, 50,000 cycles momentary at rated voltage and current
Contacts	90/10 silver-nickel, silver tin-gold
Terminals	Brass or copper/silver plate 3/16" (4.76mm) & 1/4" (6.3mm) Quick Connect terminations standard.

Mechanical

Endurance	250,000 cycles minimum
-----------	------------------------

Physical

Lighted	Incandescent - rated 10,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24 VDC)
Seals	Rocker, base & bracket are sealed.
Base	Nylon 66 GF rated to 85°C with a flammability rating of 94V0.
Actuator	Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay.
Lock	Acetal
Lens	Polycarbonate rated at 100°C
Function	2 & 3 Position Rocker Style
Bracket	Nylon Zytel
Connector	Nylon 66 rated at 85°C. Polarized.


Actuator Travel (Angular Displacement)

2 position	26°
3 positions	13° from center

Environmental

Environmental	IP67 for above panel components of the actual switch, representing an index of protection as applied to electrical equipment in accordance with IEC 529, BS 5490, DIN 400 50 & NFC 20 010.
Corrosion	Mixed Flowing Gas MFG Class III per ASTM B-827 & B-845, Method H, with 3 years exposure.
Operating Temperature	-40°C to + 85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with connector. Test criteria - No loss of circuit during test and pre and post test contact resistance.
VCH	Resonance search 24-50 Hz 0.40 DA 50-2000 ±10 G's peak Results Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025
Vibration 2	No loss of circuit during test; <10µ chatter. Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre, and post test contact resistance.
Shock	Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs. Per Mil-Std 202F, Method 107F, Test Condition A, -55°C to 85°C. Test criteria - pre and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance.
Thermal Shock	
Moisture Resistance	

Mounting Specifications



Panel Thickness Range
Acceptable Panel Thickness
.030 to .156 (.76mm to 3.96mm)
Recommended:
.030, .062, .093, .125 and .156

L	11	E	3	C	H	N	1	-	3	A	A	45	-	1	48
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens Style & Color	11 Lens Style & Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES**L****2 CIRCUIT ²**

Terminal Orientation



Position:	1	2	3
SP DP	2 & 4, 6 & 8	Connected Terminals	1 & 2, 5 & 6
11 21	ON	NONE	OFF
12 22	(ON)	NONE	OFF
13 23	ON	NONE	(OFF)
14 24	ON	NONE	ON
15 25	ON	NONE	(ON)
16 26	ON	OFF	ON
17 27	ON	OFF	(ON)
18 28	(ON)	OFF	(ON)
CIRCUITS WITH JUMPER TERMINALS			
30*	(2,4&5), (1,6&8)	OFF, OFF	(1,2&8), (4,5&6)
31	1, 2 & 5	2, 3 & 7	2, 4 & 8
PROGRESSIVE CIRCUITS			
51	3 & 4	2, 3	1 & 2
52	3 & 4	2, 3	OFF
53	(3 & 4)	2, 3	1 & 2
54	(3 & 4)	2, 3	(OFF)
55	(3 & 4)	2, 3	(1 & 2)
56	(3 & 4)	2, 3	(OFF)
57	3 & 4	2, 3	(OFF)
58*	2 & 4	2, 3	1 & 2
61	3 & 4, 7 & 8	2 & 3, 6 & 7	1 & 2, 5 & 6
62	3 & 4, 7 & 8	2 & 3, 6 & 7	OFF, OFF
63	(3 & 4), (7 & 8)	2 & 3, 6 & 7	1 & 2, 5 & 6
64	(3 & 4), (7 & 8)	2 & 3, 6 & 7	OFF, OFF
65	(3 & 4), (7 & 8)	2 & 3, 6 & 7	(1 & 2), (5 & 6)
66	(3 & 4), (7 & 8)	2 & 3, 6 & 7	(OFF, OFF)
67	3 & 4, 7 & 8	2 & 3, 6 & 7	(OFF, OFF)
68	2 & 4, 7 & 8	2 & 4, OFF	OFF, OFF
69*	2 & 4, 1, 7 & 8	2 & 4, OFF	OFF, OFF
70	(2 & 4), (7 & 8)	2 & 4, 5 & 7	(1 & 2), (5 & 7)
71	(2 & 4), (7 & 8)	2 & 4, 5 & 7	1 & 2, 5 & 7
72	2 & 4, 7 & 8	2 & 4, 5 & 7	1 & 2, 5 & 7
73	(2 & 4), (7 & 8)	2 & 4, OFF	OFF, OFF
80	2 & 4, 6 & 8	2 & 4, OFF	OFF, 5 & 6
HAZARD WARNING CIRCUITS			
A2	6, 7 & 8, 3 & 4	NONE	OFF, 1 & 2
A3	6, 7 & 8, 2 & 4	NONE	OFF, 1 & 2

* Available with ratings 1, 4, & E only.

3 RATING ²

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125VAC 1/2 HP, No Listings
B	15A 24V
C	20A 18V
D	20A 12V
E	15A 12V
G	20A 6V
H	20A 3V

4 TERMINATION ^{2,3}

1	.250 (6.4mm) TAB (QC)
3	.187 (4.7mm) TAB (QC)

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

1 Custom colors are available. Consult factory.

2 Circuits 30, 31, 58, 69 are not available with rating codes 4, C, D, G or H.

3 Termination 3 only available with rating codes 1, B, and E.

4 Not available with circuits 11-18, 51-57 and 69.

5 ILLUMINATION

Lamp #1: above terminals 9 & 10 end of switch.; Lamp #2 above terminals 11 & 12 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only.

	Lamps	Illumination Type	Lamp Wired to Terminals
S	None		
A	# 1	Independent	10+ 9-
B	# 2	Independent	12+ 11-
C	# 1	Independent	10+ 9-
	& # 2	Independent	12+ 9-
D	# 1	Dependent	4+ 9-
E	# 1	Independent	10+ 9-
	& # 2	Dependent	4+ 9-
F ⁴	# 1	Independent	10+ 9-
	& # 2	Dependent	8+ 9-
G	# 1	Dependent	4+ 9-
	& # 2	Independent	10+ 9-
H	# 1	Both Independent	10+ 9-
	& # 2	(in series)	
J	# 1	Dependent	4+ 9-
	& # 2	Dependent	1+ 9-
1	# 2	Hazard	6+ 10- 12-
2	# 1	Hazard	6+ 10- 12-

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 6: above terminals 10 & 9; Selection 7: above terminals 12 & 11

No lamp	0				
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V
LED*	Red	Amber	Green		
2VDC	A	L	F		
6VDC	B	M	G		
12VDC	C	N	H		
24VDC	D	P	J		

* Consult factory for "daylight bright", blue/green and white LED options.
Typical current draw for LED is 20ma.**8 BRACKET COLOR ¹**

	Black	White	Gray	Red
Standard Bracket	1	2	3	4
Rockerguard at Lamp 1	A	B	C	D
Rockerguard at Lamp 2	E	F	G	H

9 ACTUATOR STYLE AND COLOR ¹

	Black	White	Gray	Red	Laser Etched
Rocker	A	B	C	D	3
Paddle	J	N	K	M	4

10 & 11 LENS STYLE AND COLOR

Lens color for LEDs must be clear, white, or match color of LED.

0 - No Actuator Z - No Lens

	Clear	White	Amber	Green	Red	Blue
1	-	B	G	M	T	Large Transparent
-	7	C	H	N	U	Large Translucent
3	-	D	J	P	V	Bar Transparent
-	9	E	K	R	W	Bar Translucent
5	A	-	-	-	-	Laser Etched background color


12 LASER ETCHED, LENS OR BODY LEGEND

00 No legend this location / no actuator

For legend options & codes, visit us at carlingtech.com**13 LEGEND ORIENTATION**

0 No legend (used with codes 11-18 in selection 12)

- 1 Orientation 1 - vertical, lamp 1 on top
 2 Orientation 2 - horizontal, lamp 1 on right
 3 Orientation 3 - vertical, lamp 1 on bottom
 4 Orientation 4 - vertical, lamp 1 on left

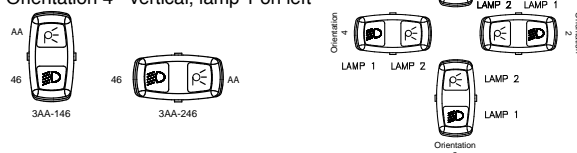**14 ACTUATOR LENS LEGEND**

00 No legend this location / no actuator

For legend options & codes, visit us at carlingtech.com

L **11** **D** **1** **S** **W** **C** **J** - **P** **M** **H** **00** - **0**

1 Series 2 Circuit 3 Rating 4 Termination 5 Illumination 6 Lock 7 Lamp 8 Bracket 9 Actuator 10 Lens 11 Lock 12 Legend 13 Legend Orientation

1 SERIES

L

2 CIRCUIT ⁵

Terminal Orientation



() - momentary

SP - single pole - uses terminals 1, 2 & 4.
DP - double pole uses terminals 5, 6 & 8.
Terminals 9, 10 & 11 for lamp circuit only.

Position:	1	2	3
SP DP	2 & 4, 6 & 8	Connected Terminals	1 & 2, 5 & 6
11 21	ON	NONE	OFF
14 24	ON	NONE	ON
16 26	ON	OFF	ON
17 27	ON	OFF	(ON)
18 28	(ON)	OFF	(ON)
CIRCUITS WITH JUMPER TERMINALS			
30 ²	(2,4&5), (1,6&8)	OFF, OFF	(1,2&8), (4,5&6)
31 ²	1, 2 & 5	2, 3 & 7	2, 4 & 8
PROGRESSIVE CIRCUITS			
51	3 & 4	2, 3	1 & 2
52	3 & 4	2, 3	OFF
53	(3 & 4)	2, 3	1 & 2
54	(3 & 4)	2, 3	(OFF)
55	(3 & 4)	2, 3	(1 & 2)
56	(3 & 4)	2, 3	(OFF)
57	3 & 4	2, 3	(OFF)
58	2 & 4	2, 3	1 & 2
61	3 & 4, 7 & 8	2 & 3, 6 & 7	1 & 2, 5 & 6
62	3 & 4, 7 & 8	2 & 3, 6 & 7	OFF, OFF
63	(3 & 4), (7 & 8)	2 & 3, 6 & 7	1 & 2, 5 & 6
64	(3 & 4), (7 & 8)	2 & 3, 6 & 7	OFF, OFF
65	(3 & 4), (7 & 8)	2 & 3, 6 & 7	(1 & 2), (5 & 6)
66	(3 & 4), (7 & 8)	2 & 3, 6 & 7	(OFF, OFF)
67	3 & 4, 7 & 8	2 & 3, 6 & 7	(OFF, OFF)
68	2 & 4, 7 & 8	2 & 4, OFF	OFF, OFF
69	2 & 4, 1, 7 & 8	2 & 4, OFF	OFF, OFF
70	(2 & 4), (7 & 8)	2 & 4, 5 & 7	(1 & 2), (5 & 7)
71	(2 & 4), (7 & 8)	2 & 4, 5 & 7	1 & 2, 5 & 7
72	2 & 4, 7 & 8	2 & 4, 5 & 7	1 & 2, 5 & 7
73	(2 & 4), (7 & 8)	2 & 4, OFF	OFF, OFF
80	2 & 4, 6 & 8	2 & 4, OFF	OFF, 5 & 6

3 RATING ²

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125VAC 1/2 HP, No Listings
B	15A 24V
C	20A 18V
D	20A 12V
E	15A 12V
G	20A 6V
H	20A 3V

4 TERMINATION ⁴

1	.250 (6.4mm) TAB (QC)
3	.187 (4.7mm) TAB (QC)

5 ILLUMINATION

Lamp #1: above terminals 9 & 10 end of switch.; Lamp #2 above terminals 11 & 12 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only.

Lamps	Illumination Type	Lamp Wired to Terminals
S	None	
B	# 2	Independent 12+ 11-

Notes:

Consult factory to verify horsepower rating for your particular circuit choice.

- Custom colors are available. Consult factory.
- Additional lamp circuits available. Consult factory.
- Available only with 3 position circuits.
- Termination 3 only available with ratings 1, B and E.
- Circuits 30, 31, 58 and 69, are not available with rating codes 4, C, D, G or H.

6 LOCK

W Lock above terminals 10 & 9.

7 LAMP

Above terminals 12 & 11

No lamp	0				
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V
LED*	Red	Amber	Green		
	A	L	F		
6VDC	B	M	G		
12VDC	C	N	H		
24VDC	D	P	J		

* Consult factory for "daylight bright", blue/green and white LED options.

Typical current draw for LED is 20ma.

8 BRACKET COLOR ¹

J Black

9 ACTUATOR STYLE AND COLOR ¹

Locking Rocker	Black	Red
	P	R

10 & 11 LENS STYLE AND COLOR

Lens color for LEDs must be clear, white, or match color of LED.

0 - No Actuator Z - No Lens

Clear	White	Amber	Green	Red	Blue	
1	-	B	G	M	T	Large Transparent
-	7	C	H	N	U	Large Translucent
3	-	D	J	P	V	Bar Transparent
-	9	E	K	R	W	Bar Translucent

11 LOCK FUNCTION AND COLOR

Locking Position

Up	Down	Up & Down	Center ³	Lock Color
A	H	R	1	Match Actuator
B	J	S	2	Black
C	K	T	3	White
D	L	V	4	Red
E	M	W	5	Safety Orange


12 LASER ETCHED, LENS OR BODY LEGEND

00 No legend this location / no actuator
For legend options & codes, visit us at carlingtech.com

13 LEGEND ORIENTATION


0 No legend (used with codes 11-18 in selection 12)

- Orientation 1 - vertical, lamp 1 on top
- Orientation 2 - horizontal, lamp 1 on right
- Orientation 3 - vertical, lamp 1 on bottom
- Orientation 4 - vertical, lamp 1 on left

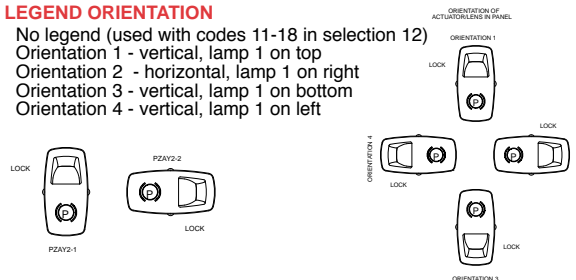


Dimensional Specifications: in. [mm]


L-SERIES
SHOWN WITH LASER ETCHED
ACTUATOR

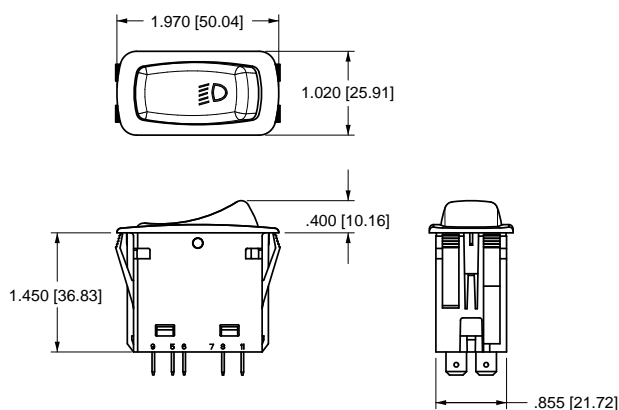


L-SERIES
SHOWN WITH ROCKER GUARD

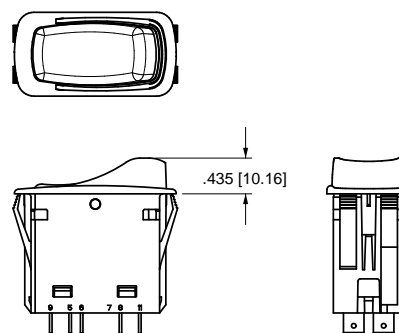

L-SERIES
SHOWN WITH LARGE LENS
AND PADDLE ACTUATOR

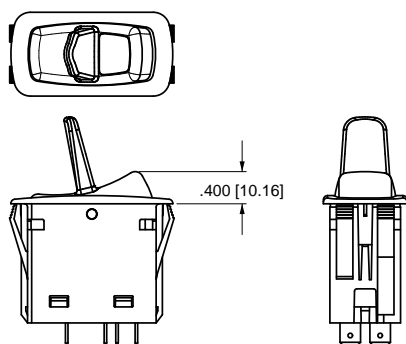


L-SERIES
SHOWN WITH BAR LENS, LOCK
AND CONNECTOR

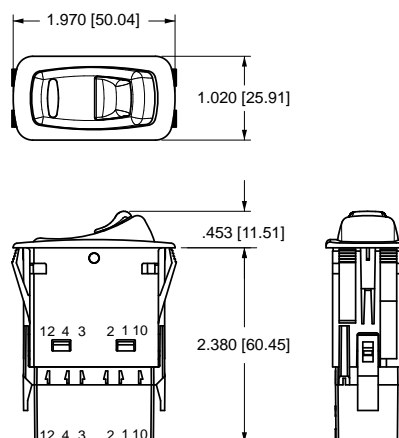


Connector **L-SERIES** CONNECTOR

- LC1-01** BLACK .250 TAB CONNECTOR (PACKARD 630 SERIES)
- LC2-01** BLACK .187 TAB CONNECTOR (PACKARD 480 SERIES)
- LC3-01** BLACK .250 TAB CONNECTOR (AMP ONLY)


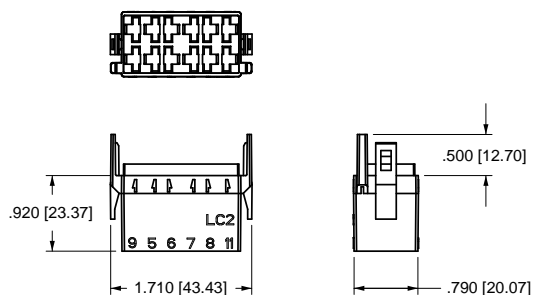


Hole Plug **L-SERIES** HOLE PLUG

- LH1** REMOVABLE HOLE PLUG
WITH NON-SERRATED WINGS
- LH2** HOLE PLUG WITH
SERRATED WINGS

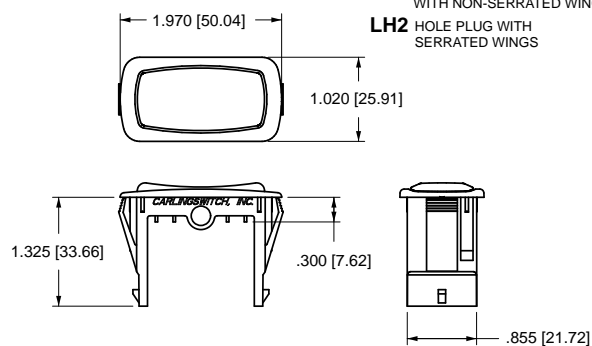

Dimensional Specifications: in. [mm]

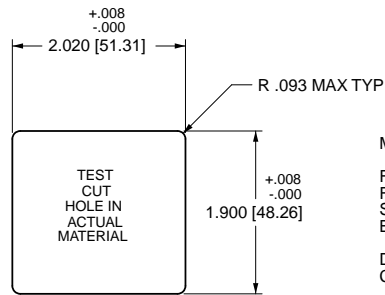





MOUNTING PANEL

FOR ADDITIONAL UNITS, ADD 1.03 [26.2] PER UNIT.
FOR MORE THAN 2 L-SERIES SWITCHES, ADD MIDDLE SECTION. AVAILABLE IN PANEL THICKNESSES LISTED BELOW. CONSULT FACTORY


DIMENSIONS: LME 2.02 [51.3mm] PLUS NUMBER OF CENTER BEZELS (LMM) X 1.034 [26.26mm]

MOUNTING PANEL THICKNESS


.062 [1.57]
.093 [2.36]
.125 [3.17]
.156 [3.96]

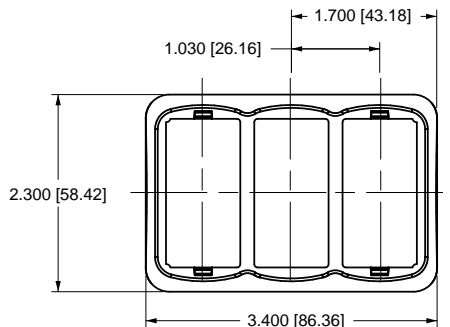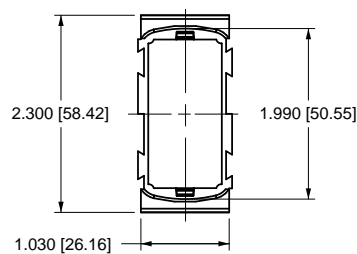

PANEL OPENING SIZE: 1.90 X 3.06 [48.3mm X 77.7mm]

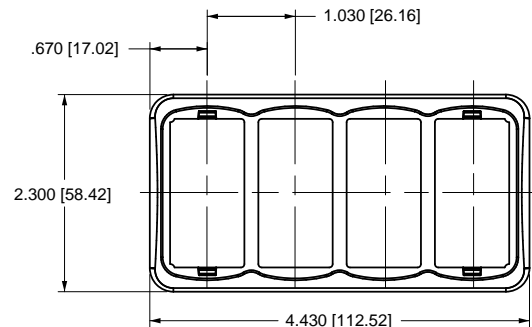

PANEL OPENING SIZE: 1.90 X 4.09 [48.3mm X 103.9mm]

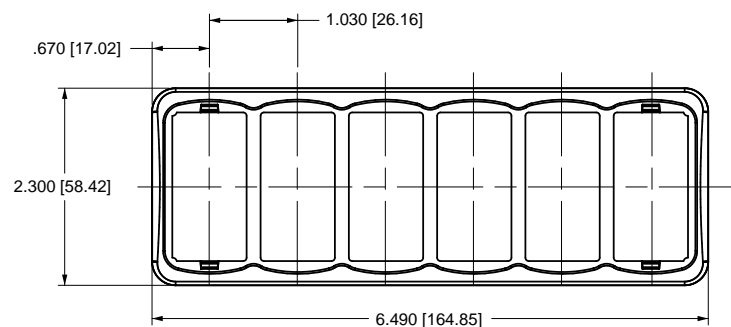

PANEL OPENING SIZE: 1.90 X 6.15 [48.3mm X 156.2mm]

Circuit Diagrams:

CIRCUIT CODE	SCHEMATIC	CIRCUIT CODE	SCHEMATIC	CIRCUIT CODE	SCHEMATIC
11		22		51	
12		23		52	
13		24		53	
14		25		54	
15		26		55	
16		27		56	
17		28		57	
18		30		58	
21		31		61	

Circuit Diagrams:

CIRCUIT CODE	SCHEMATIC	CIRCUIT CODE	SCHEMATIC
62		71	
63		72	
64		73	
65		80	
66		81	
67		82	
68		A2	
69		A3	
70			

Lamp Circuit Diagrams:

ILLUMIN. CODE	SCHEMATIC
A	
B	
C	
D	
E	
F	
G	
H	

ILLUMIN. CODE	SCHEMATIC
J	
1	
2	
K	

LEGEND	
SYMBOL	DEFINITION
	TERMINAL LOCATION
	LAMP LOCATION
	MAINTAINED CIRCUIT
	MOMENTARY CIRCUIT
	INTERNAL CONNECTION (JUMPER TERMINAL)
	2 POSITION CONNECTION
	2 POSITION
	3 POSITION

LP-Series

ILLUMINATED INDICATORS

The LP-Series Illuminated Indicators are the perfect complement to the aesthetics, reliability and performance of our L-Series rocker switches. As a critical safety feature, the illumination alerts the operator of essential system functions or malfunctions, such as: Oil Pressure, High Temperature, Transmission or other fluid levels, Parking Brake or General System confirmations. The L-Series styling assures seamless integration into most any dashboard panel.



Product Highlights:

- ♦ Vibration, Shock, and Thermoshock Resistant
- ♦ 12 or 24 Volts
- ♦ Laser Etched or Lens Illumination
- ♦ IP67 Sealing

Typical Applications:

- ♦ On/Off-Highway Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment




Electrical

Terminals	Brass or copper/silver plate 3/16" (4.76mm) & 1/4" (6.3mm) Quick Connect terminations standard.
Lighted	Incandescent - rated 10,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)

Physical

Seals	Insert, base & bracket are sealed.
Base	Nylon 66 GF rated to 85°C with a flammability rating of 94VO.
Insert	Polycarbonate rated at 100°C.
Connector	Nylon 66 rated at 85°C. Polarized
Markings	Over 1000 pad printed or laser etched legends available
Bracket	Nylon 66 GF rated to 85°C

Mounting Specifications



MOUNTING HOLE

Panel Thickness Range

Acceptable Panel Thickness
.030 to .156 (.76mm to 3.96mm)
Recommended:
.030, .062, .093, .125 and .156

Environmental

Environmental	IP67, representing an index of protection as applied to electrical equipment in accordance with IEC 529, BS 5490, DIN 400 50 & NFC 20 010.
Corrosion Resistance	Mixed Flowing Gas MFG Class III per ASTM B-827 & B-845, Method H, with 3 years exposure.
Operating Temperature	-40°C to +85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10- 500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test and pre and post test contact resistance.
Vibration 2	Resonance search 24-50 Hz 0.40 DA 50-2000 ±10 G's peak Results Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10µ chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre, and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs.
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Condition A, -55°C to 85°C. Test criteria - pre and post test contact resistance.
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance.

LP **1** **H** **R** **R** **5** - **9** **A** **A** **Y2** - **1** **DU**
 1 Series 2 Termination 3 Illumination 4 Lamp 5 Lamp 6 Bracket Color 7 Insert Color 8 Style 9 Style 10 Legend 1 11 Legend Orientation 12 Legend 2

1 SERIES

LP L-Series Illumination Plug

2 TERMINATION ³

1 .250 (8.35) x .032 (0.51) Quick Connect
3 .187 (4.75) x .032 (0.51) Quick Connect

3 ILLUMINATION

	LAMPS	ILLUMINATION	LAMP WIRED TO TERMINALS
A	1	—	10 (+) 8 (-)
B	1	—	10 (+) 8 (-)
	2	—	12 (+) 11 (-)
C	1	—	10 (+) 8 (-)
	2	—	12 (+) 8 (-)
E	1 & 2	Parallel	10 (+) 8 (-)
H	1 & 2	Series	10 (+) 8 (-)

LAMP 1 LOCATED ABOVE TERMINALS 9 & 10 END OF BRACKET.
 LAMP 2 LOCATED ABOVE TERMINALS 11 & 12 END OF BRACKET.
 POSITIVE (+) AND NEGATIVE (-) SYMBOLS APPLY TO LED LAMPS ONLY.

4,5 LAMP (same coding for both selections) ²

Selection 4: specifies lamp 1 located above terminals 10 (+) & 9 (-).
 Selection 5: specifies lamp 2 located above terminals 12 (+) & 11 (-).

No lamp	0 (position 5 only)				
Incandescent	4 3V	5 6V	6 12V	7 18V	8 24V
LED	Amber	Green	Red		
2VDC	L	F	R		
6VDC	M	G	S		
12VDC	N	H	T		
24VDC	P	J	V		

6 BRACKET COLOR

5 Black

7 INSERT COLOR ^{1, 2}

9 Painted Black - Laser Etch
A Clear (Transparent)
B White (Translucent)
C Red (Translucent)
D Amber (Translucent)
E Green (Translucent)
F Blue (Translucent)

8, 9 STYLE (same coding for both selections)




Z Not Painted (used with Insert Colors A-F)
5 Clear Laser Etch Background Color (used with Insert Color 9)
A White Laser Etch Background Color (used with Insert Color 9)

10 LEGEND OVER LAMP ¹

00 No legend
 — Laser Etched or Body Legends
 For legend options, visit us at carlingtech.com

11 LEGEND ORIENTATION

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





12 LEGEND OVER LAMP ²

00 No legend
 — Laser Etched or Body Legends
 For legend options, visit us at carlingtech.com

Notes:

- To order separately, specify LPC and selection 7 code. Ex LPC-9
- For LEDs, insert color must be clear, white or match color of LED.
- For connector, specify part number LC2-01 (.187 tabs), LC3-01 (.250 tabs).

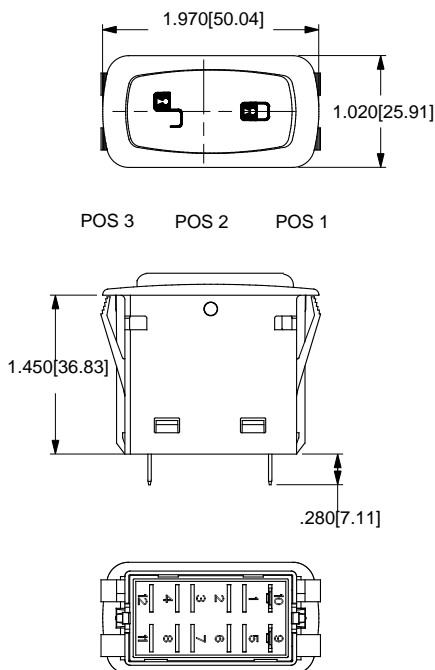

LD-Series

ELECTRONIC DIMMER CONTROLS

The LD-Series represents a dynamic breakthrough in dashboard technology, with its programmable circuitry, superior design, and unparalleled performance that affords seamless integration into most any dash panel. A variety of options, along with superior performance, functionality, and aesthetics assure compliance with the most stringent customer requirements. Key features include: robust design package with all components encased in switch housing, eliminating wire chafing, providing cost-savings as well; minimized electrical connections; IP67 sealing which prevents PCB degradation and eliminates short circuit potential. Superior heat dissipation is achieved with a heat sink mass which is over 50% larger than competitive products. Fully programmable circuitry lets the designer decide illumination levels and detent positions. EMC eliminates electrical “noise” and provides interference-free radio signals. Ease of assembly is accommodated with polarized integral connectors and an industry standard mounting hole.



Product Highlights:

- ♦ 3 Choices for incremental dimming rates
- ♦ 12 or 24 Volts
- ♦ Laser Etched or Lens Illumination
- ♦ IP67 Sealing

Typical Applications:

- ♦ On/Off-Highway Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment



Electrical

Contact Rating	.4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC
Dielectric Strength	1250 Volts RMS between pole to pole 3750 Volts RMS between live parts and accessible surfaces
Insulation Resistance	50 Megaohms
Initial Contact Resistance	10 milliohms max. @ 4VDC
Life	100,000 cycles maintained, 50,000 cycles momentary at rated voltage and current
Contacts	90/10 silver-nickel, silver tin-oxide, gold
Terminals	Brass or copper/silver plate .230 (5.84 mm) Quick Connect terminations standard.

Mechanical

Endurance	.250,000 cycles minimum
-----------	-------------------------

Physical

Lighted	Incandescent - rated 10,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24 VDC)
Seals	Rocker, base & bracket are sealed
Base	Nylon 66 GF rated to 85°C with a flammability rating of 94V0
Rocker	Nylon 66 Reinforced, rated to 105°C (modular lens). Locking rocker, standard rocker & paddle. Laser etching with a polycarbonate actuator
Lock	Acetal
Lens	Polycarbonate rated at 100°C
Bracket	Nylon Zytel
Connector	Nylon 66 rated at 85°C. Polarized


Actuator Travel (Angular Displacement)

2 position	26°
3 positions	13° from center

Environmental

Environmental	IP67 for above panel components of the actual switch, representing an index of protection as applied to electrical equipment in accordance with IEC 529, BS 5490, DIN 400 50 & NFC 20 010.
Corrosion	Mixed Flowing Gas MFG Class III per ASTM B-827 & B-845, Method H, with 3 years exposure
Operating Temperature	-40°C to + 85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test and pre and post test contact resistance
Vibration 2	24-50 Hz 0.40 DA 50-2000 ±10 G's peak Results Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10µ chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre, and post test contact resistance
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs.
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Condition A, -55°C to 85°C. Test criteria - pre and post test contact resistance
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance

Mounting Specifications



MOUNTING HOLE

Panel Thickness Range
Acceptable Panel Thickness
.030 to .156 (.76mm to 3.96mm)
Recommended:
.030, .062, .093, .125 and .156

LD 3 5 1 C C 1 - 3 A A FE - 1 FC

1 Series 2 Rating 3 Dimming Rate 4 Termination 5 Illumination 6 Illumination 7 Bracket Color 8 Actuator Style/ Color 9 Lens Color 10 Lens Color 11 Legend 1 12 Legend Orientation 13 Legend 2

1 SERIES

LD Electronic Dimmer Control

2 RATING

1 4A, 12 volts A 2A, 24 volts
2 10A, 12 volts C 5A, 24 volts

3 DIMMING RATE

1 30 - 100% 8 positions A 0 - 100% 11 positions
5 10 - 100% 10 positions

4 TERMINATION

1 .230 TABS (5.84 mm)

5 & 6 ILLUMINATION

No lamp S Red Amber Green
12V LED C N H
24V LED D P J

7 BRACKET COLOR 1

1 Black 2 White 3 Gray

8 ACTUATOR STYLE / COLOR 1

Laser Etched Black White Gray Red
Rocker 3 A B C D
Paddle 4 J K M N

9 & 10 LENS COLOR



Z No Lens
1 Clear - White B Amber G Green M Red T Blue
2 - 7 C D H N P U V
3 - 9 E J K R W
5 A - - - -
Lens Style
Large Transparent
Large Translucent
Bar Transparent
Bar Translucent
Laser Etch

11 LEGEND #1

00 No legend FC Dim FE Bright
For legend options, visit us at carlingtech.com

12 LEGEND ORIENTATION

0 No legend
1 vertical (lamp 1 on top)
2 horizontal (lamp 1 on right)
3 vertical (lamp 1 on bottom)






13 LEGEND #2

00 No legend FC Dim FE Bright
For legend options, visit us at carlingtech.com


Notes:

1 Custom colors are available. Consult factory.

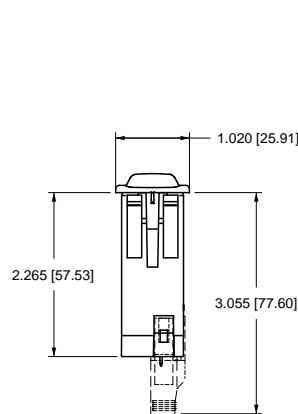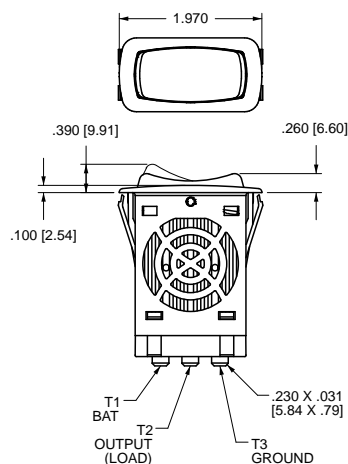


MOUNTING HOLE

Panel Thickness Range
Acceptable Panel Thickness
.030 to .156 (.76mm to 3.96mm)
Recommended:
.030, .062, .093, .125 and .156



PADDLE STYLE ACTUATOR

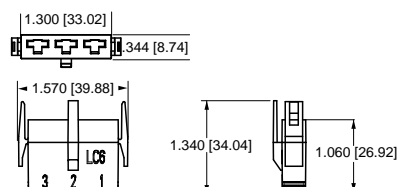


Q.C. SELECTION GUIDE			
COMPANY SERIES	PACKARD PART NO.	WIRE GAGE	
		AWG	MM ²
PACKARD METRI-PACK 630 SERIES TIN PLATED BRASS	12084590	12	3.0
	12052224	12	3.0
	12015870	16-14	2.0-1.0
	12015869	20-18	1.0-.80
	12020035	22-18 (2 REQD)	.80-.50 (2 REQD)
	12052222	20-22	.50-.35

LMR-Series

MIRROR ROTATE CONTROLS

As an extension of the L-Series family of control products, the LMR-Series provides the means to control one or two mirrors and up to four separate motors from one easy to operate joy stick control. When used in conjunction with our dimmer control and wiper/washer control, Carling Technologies provides a solution to most any dashboard control need within the Transportation market.

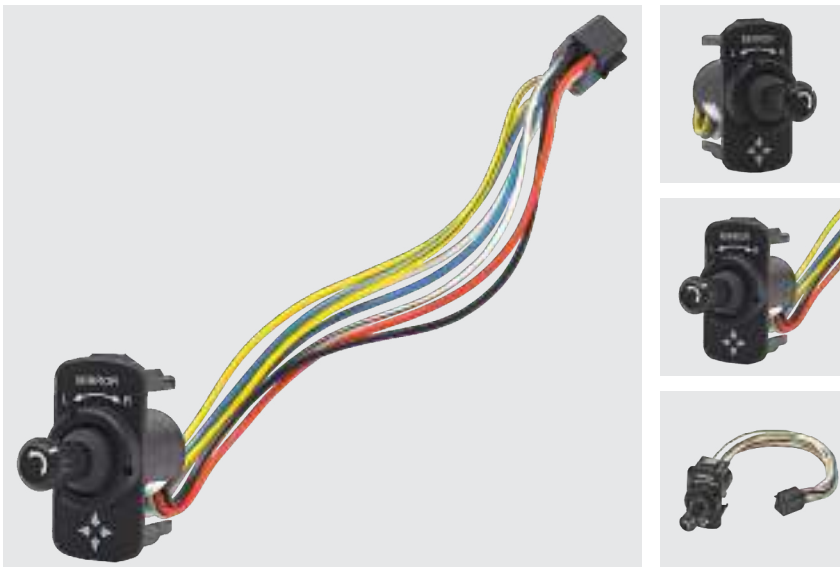

Product Highlights:

- ♦ Two or four axis
- ♦ Controls up to four separate motors
- ♦ Industry standard 44 x 22mm mounting hole
- ♦ Includes Delphi-Packard 8 pin connector

Typical Applications:

- ♦ On/Off-Highway Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment



Actuator

4 axis joy stick style

Electrical

1A 14V; .5A 28V

Sealing

internal boot and potted wire leads protect critical components from dust and moisture

Termination ¹

9" wire leads with Delphi-Packard connector #12047886 ³

Mechanism

Sliding contacts in conjunction with a circuit board

LMR - **01** - **1**

1 Base Part Number 2 Color 3 Legend


1 BASE PART NUMBER: SERIES / RATING / FUNCTION / TERMINATION
LMR 2 position (left, right), 4 axis (N,S,E,W) with wire leads

2 ACTUATOR /BRACKET COLOR
01 Black

3 LEGEND ²
Z no legend
1 2 arrows symbol (left, right)
2 4 arrows symbol (front, back and left, right)

Notes:

- Compatible with Delphi-Packard #12045688.
- All legends are imprinted in white. All product supplied with Mirror L & R legend on top of bracket and detent and directional legend on actuator.
- Delphi-Packard is a registered trademark of Delphi-Packard Electrical Systems, Warren, Ohio.

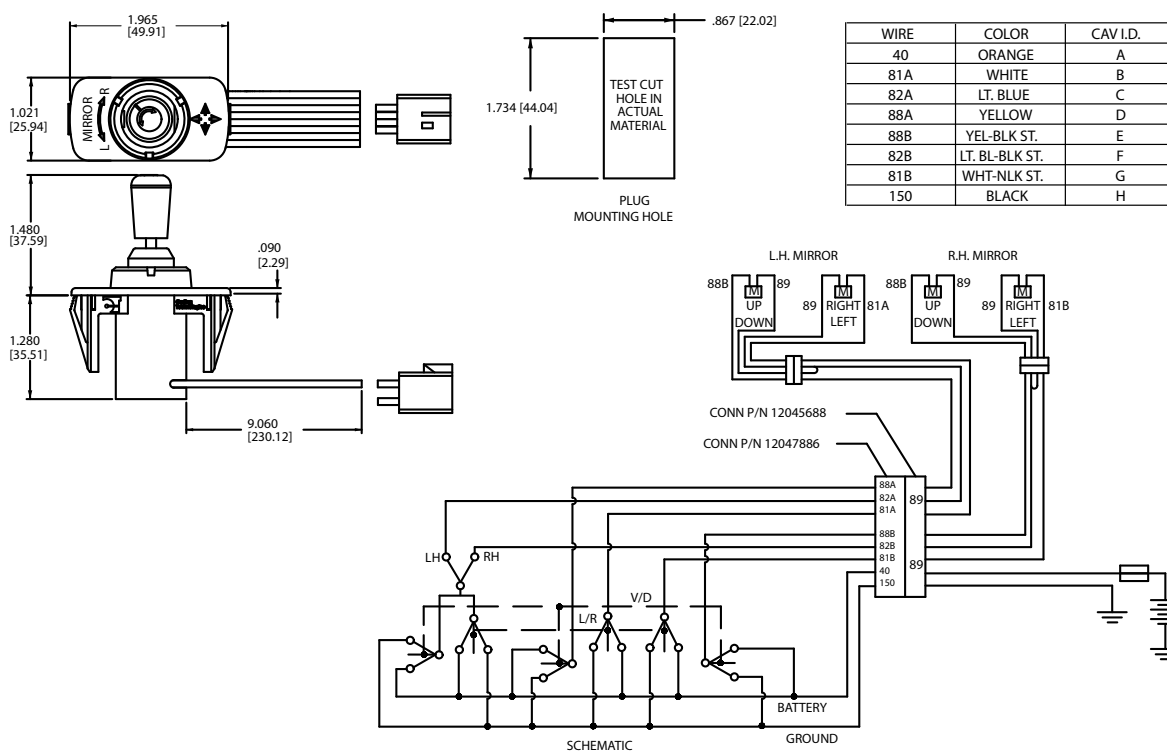

LW-Series

WIPER/WASHER CONTROLS

The LW-Series Electronic Wiper Washer Control combines two switches into one self-contained unit allowing effortless control of both wash and wipe functions from a singular location. A variety of features and options including, Continuous low and high speed wiper positions, Six intermittent delay intervals ranging from 3-18 seconds, Push-to-wash button and an LED Night-light indicator combine to provide the flexibility to meet most any Cab design. The LW series is available for 14 or 28 volt operation and can be adapted to single or dual relay systems.



Product Highlights:

- ♦ Controls both wash and wipe functions of vehicles
- ♦ 14 or 28 Volts
- ♦ Illuminated or Non-illuminated options
- ♦ Laser etched legends available

Typical Applications:

- ♦ On/Off-Highway Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment



Electrical

Contact Rating	1 relay 8 amps, 14VDC 4 amps, 28VDC 2 relays 1 amps, 14VDC 1 amps, 28VDC
Terminals	.187 (7.4mm) Quick Connect terminations standard.
Protection	Reverse polarity protection Over voltage protection Cold cranking protection according to SAE J1455, Sections. 4.11.1.1.1 and 4.11.1.2.1 Transient voltage protection which includes load dump and inductive switching according to SAE J1455, sec. 4.11.2.2 Electrostatic discharge protection according to SAE J1455 Sec. 4.11.2.2.5.1 (Discharge a 150 pf capacitor that has been charged to a potential of 15kV through 150 Ohm resistor.) Meets all other EMI/EMC requirements for class C trucks.

Mechanical


Mechanical Vibration	Sinusoidal Vibration: 10-55-10 Hz, 0.06" DA, one minute-cycle, three hours/axis Random Vibration: Three hours/axis, three mutually perpendicular axes with a test level 4G's. Frequency Amplitude 5Hz 0.16 G2/Hz 100Hz 0.16 G2/Hz 500Hz -3dB/octave roll-off Tests were conducted according to SAE J1455, Sec 5.7 and Sec. 4.9.4. Shock: MIL-STD-202G Method 213B, Test Condition K, 30G's, 11 ms.
Endurance	According to SAE J2349, March 97 for windshield washer switch for Trucks, Buses and Multipurpose Vehicles (20,000 cycle minimum).

Physical Characteristics


Illumination	LED, rated 100,000 hours 1/2 life
Cover	Acetate
Washer Actuator	Silicone
Toggle Actuator	Nylon 6/6 glass filled
Bracket	Nylon 6/6
Connector	Nylon 6/6 rated 85°C polarized
Washer Function	Momentary
Toggle Function	Maintained Intermittent
Operation	Momentary
Weight	44 grams

Environmental


Operating Temperature	-25°C to +85°C
Temperature Cycle	According to SAE J1455, Sec. 4.1.3.1 (See Figure below)

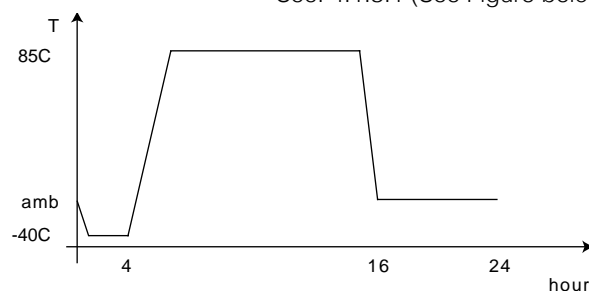

Thermal Shock	According to SAE J1455, Sec. 4.1.3.2 (See Figure below)
---------------	---

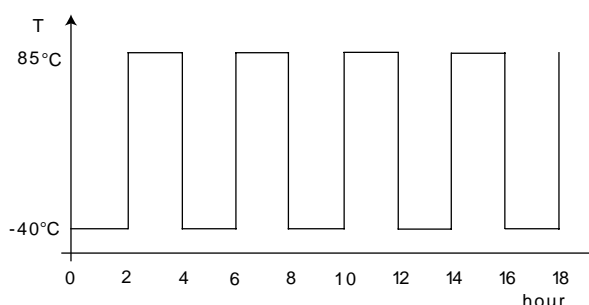

Humidity	According to SAE J1455, Sec. 4.2.3 (30 cycles for 8 hrs. with maximum temperature of 85°C and 95% relative humidity.
Dust Bombardment	According to SAE J1455, Sec. 4.7.3 (with dust concentration of 0.88gm/m ³ for 24 hours.)
Salt Spray	MIL-STD-202G, Method 101D for 96 hours.

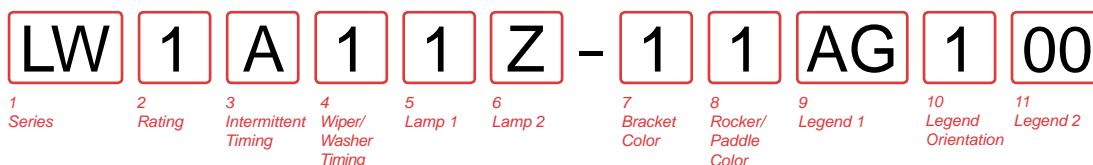

1 SERIES

LW Wiper/Washer Control with six intermittent positions: low, high, wash/wipe

2 RATING 1

1	8A, 14VDC (1 relay)	4	1A, 14VDC (1 relay)
2	4A, 28VDC (1 relay)	5	1A, 14VDC (2 relay)
3	1A, 14VDC (1 relay)	6	1A, 28VDC (2 relay)

3 INTERMITTENT TIMING

A 2-15 seconds

4 WIPER/WASHER TIMING

1 3 seconds

5 LAMP #1 (ABOVE WASH)

Z	No Lamp	2	Red LED
1	Green LED	3	Amber LED

6 LAMP #2 (ABOVE WIPE)

Z	No Lamp	2	Red LED
1	Green LED	3	Amber LED

7 BRACKET COLOR

1 Black

8 ROCKER / PADDLE COLOR

1 Black


9 LEGEND #1

00 No legend

For legend options, visit us at carlingtech.com

10 LEGEND ORIENTATION

0 No legend
1 Vertical (lamp 1 on top)
2 Horizontal (lamp 1 on right)




11 LEGEND #2

00 No legend

For legend options, visit us at carlingtech.com

Notes:

- Relay coil current is 1A max. Relay must have an arc suppression in parallel with the coil. Ref P/N LC2-01 for black wiper/washer connector housing.

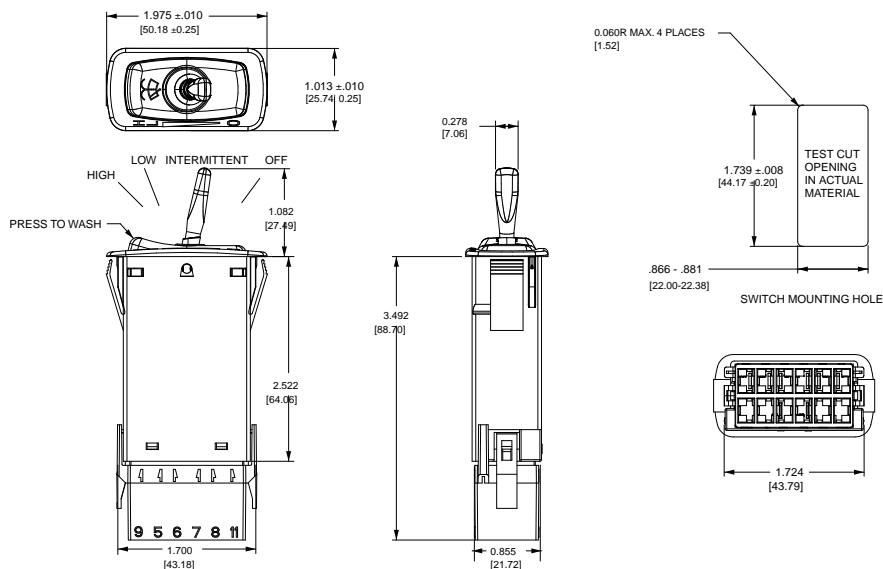

Principles of operation:

From the OFF position, moving the toggle one step up puts the function into the intermittent slower mode (18 sec.). Moving the toggle another step up reduces the delay time by 3 sec for each of the next six steps. The seventh step up puts the motor into a continuous low-speed mode and the last step up puts the motor into the high-speed mode. Reversing the previous steps puts the motor finally into the stop/parking mode. During the OFF position, intermittent and low-speed modes, pressing the wash button activates the wash function. Wipe function starts after a two second delay from the onset of the washing and continues for three continuous wipes after the wash button is released. For convenience, the wash function is not active during the high-speed mode.

The Wiper Control is designed to interface with single or dual relay systems for intermittent delay and the park function. The high speed is driven directly via a power transistor internal to the module. The coil of the relay is pulled down to ground during the intermittent, low-speed and high-speed modes respectively. (Contact Carling Technologies for wiring diagrams)

N-Series

ADDRESSABLE ROCKER SWITCHES

The N-Series Addressable Switch combines the look and feel of a traditional electro-mechanical control coupled with a built in PCB and provides a flexible, cost effective alternative to a CAN/LIN based switch. The N-Series produces up to 144 individual switch IDs by using a resistive ladder circuit. Different switch IDs are achieved by changing the resistor values tied to individual loads, which can then be assigned to the specific functions that the switch is controlling. Each switch is connected to an ECU and the application software is written to recognize the switch IDs to determine which load is being controlled as well as the selected actuator position. As a result, the wiring harnesses are more simplified and specific loads can now be rearranged without the need for a costly and time consuming harness redesign, giving designers the ultimate in design flexibility.



Resources:

Download 3D CAD Files

[IGS >](#) [STP >](#)

Product Highlights:

- ♦ Cost effective alternative to CAN/LIN based switch
- ♦ Up to 144 individual switch IDs
- ♦ Simplified wiring harnesses
- ♦ Readdressable loads without harness redesign
- ♦ Available with paddle or rocker actuator

Typical Applications:

- ♦ On-Highway Transportation Equipment
- ♦ Agricultural Equipment
- ♦ Construction Equipment
- ♦ Marine



Electrical

Contact Rating	.4VA @ 28VDC (MAX)
Dielectric Strength	1250 Volts RMS between pole to pole 3750 Volts RMS between live parts and accessible surfaces
Insulation Resistance	50 Megaohms
Contact Bounce	20 milliseconds max.
Contacts	gold plated
Terminals	Brass or copper/silver plate 3/16" (4.76mm) Quick Connect terminations standard.

Mechanical

Endurance	250,000 cycles minimum
-----------	------------------------

Physical

Lighted	Incandescent - rated 10,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)
Seals	Rocker, base & bracket are sealed.
Base	Nylon 66 GF rated to 85°C with a flammability rating of 94V0.
Rocker and Paddle	Nylon 66 Reinforced, rated to 105°C
Laser Etched Rocker	Polycarbonate rated at 100°C.
Lens	Polycarbonate rated at 100°C. Front snap-in.
Connector	Nylon 66 rated at 85°C. Polarized.
Bracket	Nylon Zytel


Actuator Travel (Angular Displacement)

2 position	26°
3 position	13° from center

Environmental

Environmental	IP67 for above the panel components of the actual switch, representing an index of protection as applied to electrical equipment in accordance with IEC 529, BS 5490, DIN 400 50 & NFC 20 010.
Operating Temperature	-40°C to +85°C
Vibration	Per SAE J1399 "electronic Tachometer Specification" for Class II truck and bus applications. Test Criteria: No change in resistance and no evidence of physical damage.
Salt Spray	Exposure to 95% water, 5% NCl fog solution at 95 degrees F according to ASTM B 117-90 "Standard Method of Salt Spray (fog) Testing". Test Criteria: No visual evidence of corrosion or external physical damage.
Humidity	Samples were exposed to selected temperature profile, while maintaining 90% +/- 5% relative humidity for 30 cycles. Test Criteria: No evidence of external physical deterioration.

Mounting Specifications



MOUNTING HOLE

Panel Thickness Range

Acceptable Panel Thickness
.030 to .156 (.76mm to 3.96mm)
Recommended:
.030, .062, .093, .125 and .156


N	4	1	2	1	A	N	H	1	-	1	1	2	46	-	1	EK
1 Series	2 Actuator	3 R1 Resistive ID	4 R2 Resistive ID	5 Resistor Constants	6 Illumination Lamp	7 Lamp	8 Lamp	9 Bracket	10 Actuator	11 Lens Style & Color Lamp 1	12 Lens Style & Color Lamp 2	13 Legend	14 Legend Orientation	15 Actuator Lens Legend		

1 SERIES

N

2 CIRCUIT ²

Terminal Orientation



() - momentary

Position: 1

2

3

STANDARD

4	2 & 4	Connected Terminals	1 & 2
5	On	NONE	ON
6	(On)	NONE	ON
7	On	ON	ON
8	(On)	ON	ON

3 R1 RESISTIVE IDENTIFICATION

1	1020	7	3570
2	1300	8	4320
3	1620	A	5230
4	2000	B	6340
5	2430	C	7870
6	2940	D	10000

4 R2 RESISTIVE IDENTIFICATION

1	1020	7	3570
2	1300	8	4320
3	1620	A	5230
4	2000	B	6340
5	2430	C	7870
6	2940	D	10000

5 RESISTOR CONSTANTS (INDICATES SWITCH STATE)

	R3	R4	R5
1	1300	10000	5320
2	825	6650	3830

6 ILLUMINATION

Lamp #1: above terminals 9 & 10 end of switch.; Lamp #2 above terminals 11 & 12 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only.

	Lamps	Illumination Type	Lamp wired to Terminals
S	None		
A	# 1	Standard	10+ 12-
	# 2	Standard	11+ 9-
B	# 1 & 2	Special Parallel	11+ 9-
C	# 1 & 2	Special Parallel	10+ 9-
1	# 1	Independent	10+ 9-
2	# 2	Independent	12+ 11-
3	# 1	Independent	10+ 9-
	# 2	Independent	12+ 9-
4	# 1	Independent	10+ 9-
	# 2	Independent	12+ 11-

7.8 LAMP (SAME CODING FOR BOTH SELECTIONS)

Selection 7: above terminals 10 & 9; Selection 8: above terminals 12 & 11
No lamp 0

LED* 12VDC

Red C

Amber N

Green H

* Consult factory for "daylight bright", blue/green and white LED options.
Typical current draw for LED is 20ma.

9 BRACKET COLOR ¹

	Black	White	Gray	Red
Standard Bracket	1	2	3	4
Rockerguard at Lamp 1	A	B	C	D
Rockerguard at Lamp 2	E	F	G	H

10 ACTUATOR STYLE AND COLOR ¹

	Black	White	Gray	Red	Laser Etched
Rocker	A	B	C	D	1
Paddle	J	N	K	M	

11 & 12 LENS STYLE AND COLOR

Lens color for LEDs must be clear, white, or match color of LED.

0 - No Actuator Z - No Lens


Clear	White	Amber	Green	Red	Blue	
1	-	B	G	M	T	Large Transparent
-	7	C	H	N	U	Large Translucent
3	-	D	J	P	V	Bar Transparent
-	9	E	K	R	W	Bar Translucent
5	A	-	-	-	-	Laser Etch background color

13 LEGEND ORIENTATION

00 No legend this location / no actuator
For legend options & codes, see pages 54-65 of this catalog.

14 LEGEND ORIENTATION

0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1 - vertical, lamp 1 on top
2 Orientation 2 - horizontal, lamp 1 on right
3 Orientation 3 - vertical, lamp 1 on bottom
4 Orientation 4 - vertical, lamp 1 on left

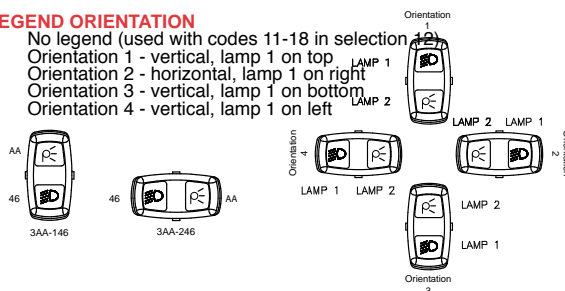

15 ACTUATOR LENS LEGEND

00 No legend this location / no actuator
For legend options & codes, see pages 54-65 of this catalog.


Notes:

- 1 Custom colors are available. Consult factory.
- 2 Switch supplied with .187 tab terminals.

Dimensional Specifications: in. [mm]


N-SERIES

SHOWN WITH LASER ETCHED ACTUATOR

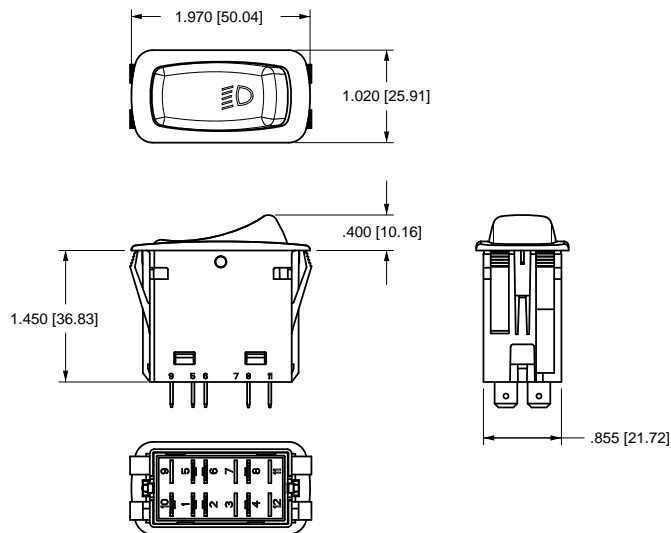


N-SERIES

SHOWN WITH ROCKER GUARD

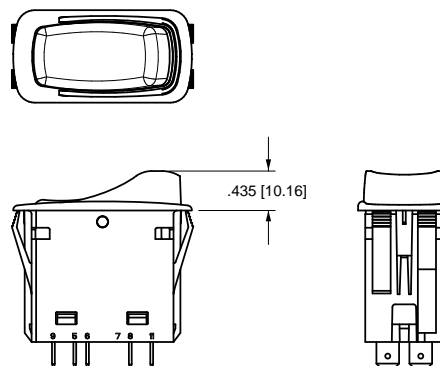


N-SERIES

SHOWN WITH LARGE LENS
AND PADDLE ACTUATOR

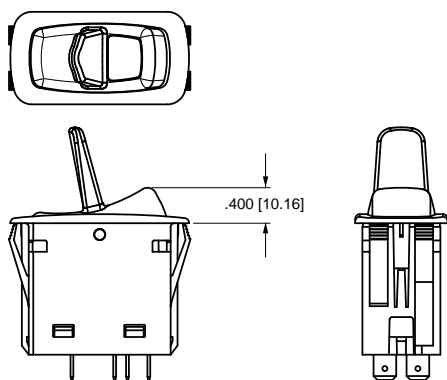


N-SERIES

SHOWN WITH BARS LENS
AND CONNECTOR

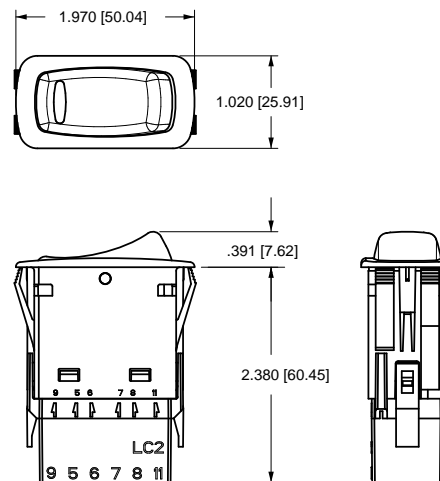


N-SERIES

LC2-01 BLACK .187 TAB CONNECTOR (PACKARD 480-SERIES)

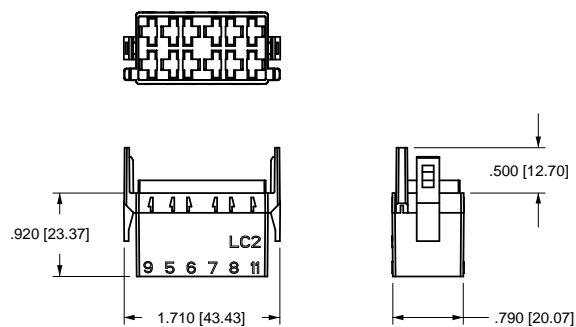

N-SERIES

LH1 REMOVABLE HOLE PLUG WITH NON-SERRATED WINGS
LH2 HOLE PLUG WITH SERRATED WINGS

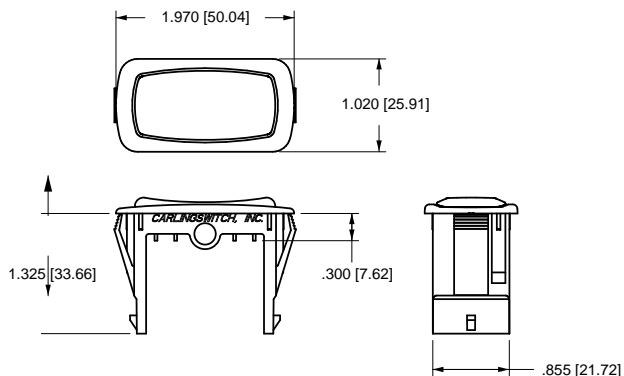

Circuit Diagrams:

CIRCUIT CODE	SCHEMATIC
4	
5	
6	
7	
8	

Lamp Circuit Diagrams:

ILLUM. CODE	SCHEMATIC
A	
B	
C	
1	
2	
3	
4	

LT-Series

TOGGLE SWITCHES

The LT-Series illuminated toggle switches feature up to a three-color lighting sequence from a single lamp. These lighted toggles contain neoprene bushing seals for dust and moisture protection. A variety of circuits and terminations are available.



Product Highlights:

- ♦ 1 or 2 Pole
- ♦ Independent or Dependent Illumination
- ♦ Choice of 5 Actuator Styles
- ♦ Up to 3 different colors under a single lens

Typical Applications:

- ♦ Marine
- ♦ Transportation



Dielectric Strength

1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

LT-1561 - 1 30 - 012

¹
Base Part Number

²
Actuator
Style

³
Lighting
Sequence

⁴
Lamp Voltage

1 BASE PART NUMBER: SERIES / POLES / ILLUMINATION / CIRCUITRY / RATING / TERMINATION ⁵

10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 12-28VDC

Single Pole	Solder Lug	.250 Tab QC	Screw Terms	Wire Leads
On-None-Off	LT-1510	LT-1511	LT-1514	LT-1515
On-None-(Off)	LT-1520	LT-1521	LT-1524	LT-1525
(On)-None-Off	LT-1530	LT-1531	LT-1534	LT-1535
On-None-On	LT-1540	LT-1541	LT-1544	LT-1545
On-None-(On)	LT-1550	LT-1551	LT-1554	LT-1555
On-Off-On	LT-1560	LT-1561	LT-1564	LT-1565
On-Off-(On)	LT-1570	LT-1571	LT-1574	LT-1575
(On)-Off-(On)	LT-1580	LT-1581	LT-1584	LT-1585
Double Pole	Solder Lug	.250 Tab QC	Screw Terms	Wire Leads
On-None-Off	LT-2510	LT-2511	LT-2514	LT-2515
On-None-(Off)	LT-2520	LT-2521	LT-2524	LT-2525
(On)-None-Off	LT-2530	LT-2531	LT-2534	LT-2535
On-None-On	LT-2540	LT-2541	LT-2544	LT-2545
On-None-(On)	LT-2550	LT-2551	LT-2554	LT-2555
On-Off-On	LT-2560	LT-2561	LT-2564	LT-2565
On-Off-(On)	LT-2570	LT-2571	LT-2574	LT-2575
(On)-Off-(On)	LT-2580	LT-2581	LT-2584	LT-2585

2 ACTUATOR STYLE

Paddle ¹

- 1 Clear Paddle
- 4 Solid Color Paddle

Snapkap Style ²

- 5 Bright Chrome
- 6 Satin Chrome
- 7 Black Molded

Notes:

- 1 Solid color paddle available with lighting sequence 01, 02, 10 or 20.
- 2 SnapKap Toggle Lenses are available separately. Consult factory.
- 3 Independent lamp is standard. Dependent lamp with ON-OFF function (including momentary) is available with Lighting Sequences 10, 20, 30, 40 and 50. (No light in OFF position.)
- 4 Green and blue not recommended with 125 volt or 250 volt neon lamps.
- 5 Additional terminations available. Consult factory for details.
- () Indicates momentary function.

3 LIGHTING SEQUENCE ^{3,4}

	position 1	position 2	position 3
01	red	red	red
02	amber	amber	amber
03	green	green	green
10	red	---	none
11	red	clear	red
12	red	clear	amber
13	red	clear	green
14	red	clear	blue
15	red	clear	clear
20	amber	---	none
21	amber	clear	red
22	amber	clear	amber
23	amber	clear	green
24	amber	clear	blue
25	amber	clear	clear
30	green	---	none
31	green	clear	red
32	green	clear	amber
33	green	clear	green
34	green	clear	blue
35	green	clear	clear
40	blue	---	none
41	blue	clear	red
42	blue	clear	amber
43	blue	clear	green
44	blue	clear	blue
45	blue	clear	clear
50	clear	---	none
51	clear	clear	red
52	clear	clear	amber
53	clear	clear	green
54	clear	clear	blue
55	clear	clear	clear



4 LAMP VOLTAGE ⁴

incandescent

- 006 6 volt
- 012 12 volt
- 018 18 volt
- 024 24 volt

neon

- 125N 125 volt neon
- 250N 250 volt neon

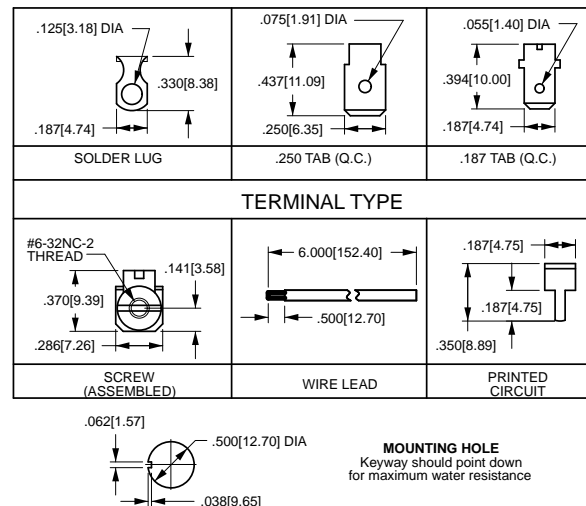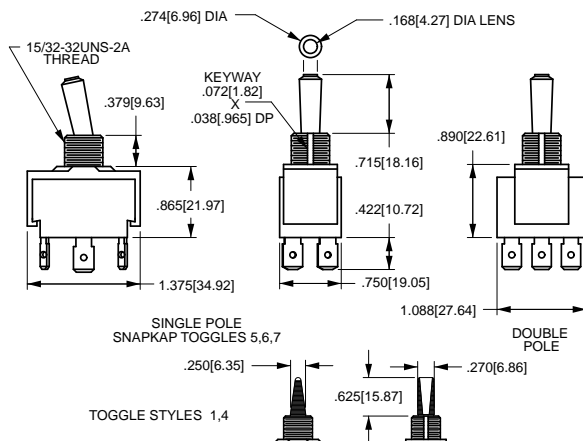

F-Series

SINGLE POLE TOGGLE SWITCHES

General purpose workhorses with options tailored to meet most any need. Ratings to 20A 277VAC, various actuator, bushing, termination, and circuit choices allow this versatile switch to easily integrate into a variety of different applications. The F-Series is appropriate for usage in low voltage DC applications.



Resources:

Download 3D CAD Files

[IGS >](#)

[STP >](#)

Product Highlights:

- ♦ Ratings to 20A
- ♦ Suitable for low voltage 12/24V DC
- ♦ Variety of termination options
- ♦ Consult factory for large choice of bushing/toggle length combinations

Typical Applications:

- ♦ Marine
- ♦ Food Service
- ♦ Generator
- ♦ Industrial Control
- ♦ Office Automation



Dielectric Strength

1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

2FA54 - 73 / TABS

1
Base Part Number

2
Actuator
Style

3
Tab Terminals

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION¹

10A 250VAC; 15A 125VAC; 3/4 HP 125-250VAC

	Solder Lug	.250 Tab QC	Screw Terminals
On-None-Off	2FA53	2FA53-.../TABS	2FA54
(On)-None-Off	6FA53	6FA53-.../TABS	6FA54
On-None-(Off)	6FA57	6FA57-.../TABS	6FA58
On-None-On	2FB53	2FB53-.../TABS	2FB54
On-None-(On)	6FB53	6FB53-.../TABS	6FB54
On-Off-On	2FC53	2FC53-.../TABS	2FC54
On-Off-(On)	6FC53	6FC53-.../TABS	6FC54
(On)-Off-(On)	6FC53	6FC53-.../TABS	6FC54

Additional ratings up to 20A 125VAC, 12A 250VAC, 1HP 120-240 VAC available. Consult factory for specifics.

2 ACTUATOR STYLE

BAT STYLE TOGGLE²



unsealed	sealed	toggle length	bushing length
73	78	0.687	0.465
E3	E8	2.000	0.465

3 TAB TERMINALS

/TABS Tab Terminals
(blank) Leave blank if tab terminals not required.

Notes:

- Consult factory for .187 tab, wire lead and combination screw/tab/solder lug callouts.
 - Additional toggle options are available. Consult factory.
- () indicates momentary function.

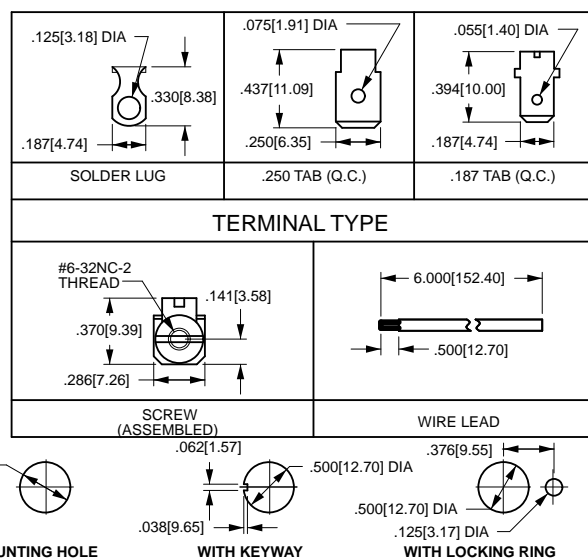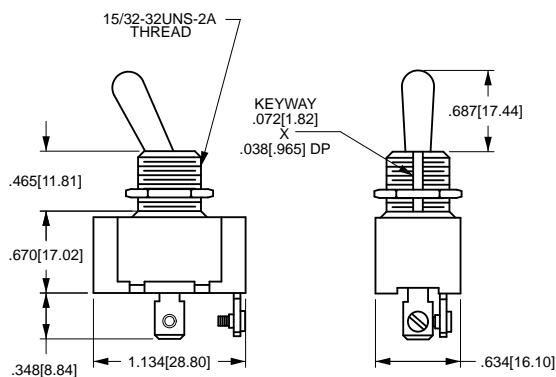

G-Series

TOGGLE SWITCHES

General purpose workhorses with options tailored to meet most any need. Ratings to 20A 277VAC, international approvals, various actuator, bushing, termination, and circuit choices allow this toggle switch to easily integrate into a variety of different applications. The G-Series is appropriate for usage in low voltage DC applications.



Resources:

Download 3D CAD Files

[IGS >](#)

[STP >](#)

Product Highlights:

- ♦ Ratings to 20A 277VAC available
- ♦ Metal bat or nylon bat/paddle actuator styles
- ♦ UL, CSA and VDE approvals for select circuits
- ♦ Suitable for low voltage 12/24V DC

Typical Applications:

- ♦ Marine
- ♦ Food Service
- ♦ Generator
- ♦ Industrial Control
- ♦ Office Automation



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

VDE: 4000V - live to dead metal
parts; 1250V - opposite polarity &
across open contacts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0° to 85°C)

2GM51 - 73

¹
Base Part Number

²
Actuator Style

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION ³**Single Pole in Double Pole base**

10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC

solder lug	.250 tab	screw term.		solder lug	.250 tab	screw term.
2GA50	2GA51	2GA54	On-None-Off	2GK50	2GK51	2GK54
6GA5A	6GA5B	6GA5E	(On)-None-Off	6GK5A	6GK5B	6GK5E
6GA5L	6GA5M	6GA5S	On-None-(Off)	6GK5L	6GK5M	6GK5S
2GB50	2GB51	2GB54	On-None-On	2GL50	2GL51	2GL54
6GB5A	6GB5B	6GB5E	On-None-(On)	6GL5A	6GL5B	6GL5E
2GC50	2GC51	2GC54	On-Off-On	2GM50	2GM51	2GM54
6GC5A	6GC5B	6GC5E	On-Off-(On)	6GM5A	6GM5B	6GM5E
6GC5L	6GC5M	6GC5S	(On)-Off-(On)	6GM5L	6GM5M	6GM5S
10A 250VAC, 15A 125VAC, 12 (6)A 250VAC T85/55 ENEC/VDE Approved ¹						
2GA90	2GA91	-	On-None-Off	2GK90	2GK91	-
2GB90	2GB91	-	On-None-On	2GL90	2GL91	-
2GC90	2GC91	-	On-Off-On	2GM90	2GM91	-



Additional ratings up to 20A 125VAC, 12A 250VAC, 1HP 120-240 VAC
available. Consult factory for specifics.

2 ACTUATOR STYLE ⁴

	unsealed	sealed	toggle length	bushing length
BAT	73	78	0.687	0.465
PADDLE ⁵	NBL3	NBL8	0.687	0.465
BAT ²	D-3B-B	-	0.687	0.379
PADDLE ²	-	D-4B-B	0.687	0.379

Notes:

- 1 Not available with 73 or NBL3 style toggles, T55 with 78 and NBL8 style toggles.
- 2 All nylon bushing and toggle.
- 3 Consult factory for .187 tab, wire lead and combination screw/tab/solder lug termination callouts.
- 4 Additional actuator options available. Consult factory.
- 5 Nylon toggle with black ebanol plated bushing.
- () Indicates momentary function.

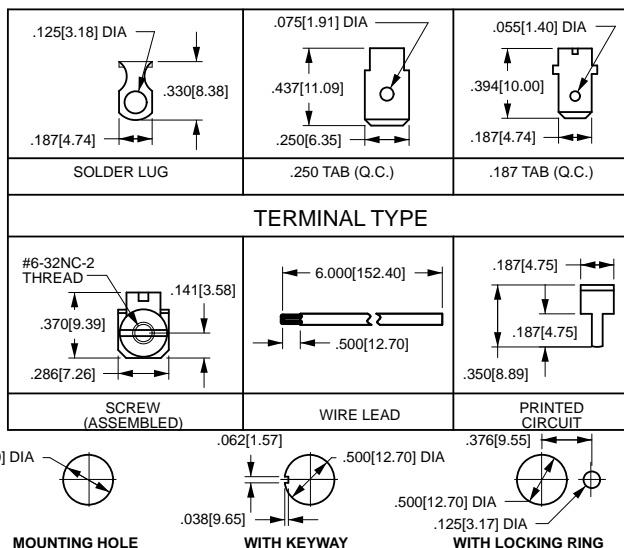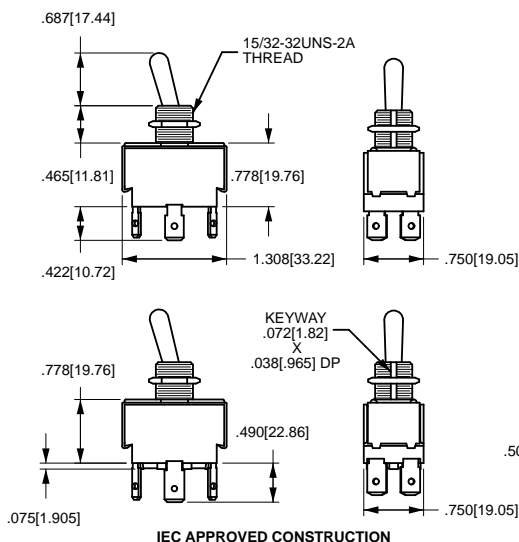

H/I-Series

TOGGLE SWITCHES

General purpose workhorses with options tailored to meet most any need. Ratings to 17A 125VAC, various actuator, bushing, termination, and circuit choices allow this toggle to easily integrate into a variety of different applications. The H/I-Series is appropriate for usage in low voltage DC applications.



Product Highlights:

- ♦ Ratings up to 600VAC
- ♦ Available reversing and progressive switch circuits
- ♦ Variety of termination options
- ♦ Consult factory for large choice of bushing/toggle length combinations

Typical Applications:

- ♦ Food Service
- ♦ Generator
- ♦ Industrial Control
- ♦ Office Automation



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

50,000 cycles - maintained
25,000 cycles - momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0° to 85°C)

HK251 - 73

¹
Base Part Number

²
Actuator Style

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION ²

10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 1, 2 or 3 phase

Three Pole

solder lug	.250 tab	screw term.	wire leads
HK250	HK251	HK254	HK255
HK25A	HK25B	HK25E	HK25F
HK25L	HK25M	HK25S	HK25S
HL250	HL251	HL254	HL25E
HL25A	HL25B	HL25E	HL25F
HM250	HM251	HM254	HM25E
HM25A	HM25B	HM25E	HM25F
HM25L	HM25M	HM25S	HM25T

Off-None-On
Off-None-(On)
On-None-(Off)
On-None-On
On-None-(On)
On-Off-On
On-Off-(On)
(On)-Off-(On)

Four Pole

solder lug	.250 tab	screw term.	wire leads
IK250	IK251	IK254	IK255
IK25A	IK25B	IK25E	IK25F
IK25L	IK25M	IK25S	IK25T
IL250	IL251	IL254	IL25E
IL25A	IL25B	IL25E	IL25F
IM250	IM251	IM254	IM25E
IM25A	IM25B	IM25E	IM25F
IM25L	IM25M	IM25S	IM25T



Additional ratings up to 20A 125VAC, 12A 250VAC, 1HP 120-240 VAC available. Consult factory for specifics.

2 ACTUATOR STYLE ¹

	unsealed	sealed	toggle length	bushing length
BAT	73	78	0.687	0.465
PADDLE³	E3	E8	2.000	0.465
	NBL3	NBL8	0.687	0.465

Notes:

- Additional actuator options available. Consult factory for details.
- Consult factory for .187 tab and combination screw/tab/solder lug termination callouts.
- Nylon toggle with black ebanol plated bushing.
- Indicates momentary function.

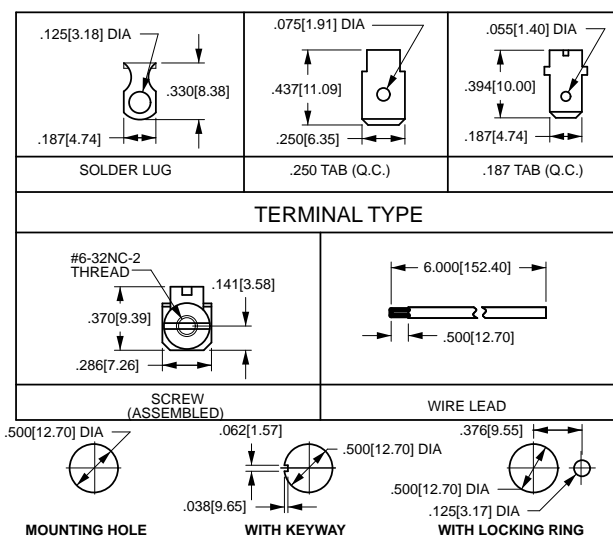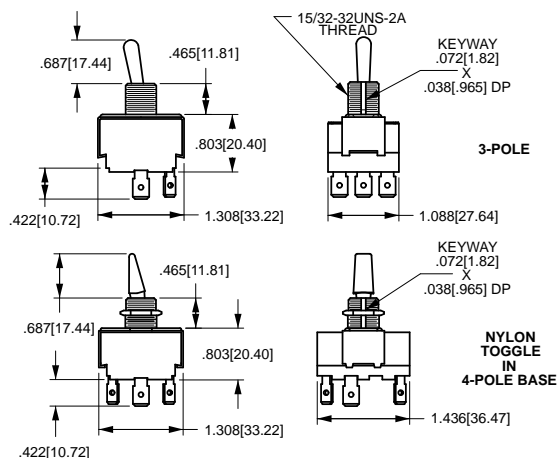

C-Series

SINGLE POLE TOGGLE SWITCHES

The C-Series single pole compact high current toggle switches are ideal for applications with back panel size constraints. These switches feature self-cleaning contacts and ratings up to 20A 125VAC, 10A 250VAC, 1 1/2 HP 125-250VAC. With a rugged metal construction, these switches figure prominently in markets with stringent current carrying requirements.



Product Highlights:

- ♦ Ratings to 20A 125VAC and 1.5HP 125-250VAC
- ♦ Compact size
- ♦ Self-cleaning wiping style contacts
- ♦ 4 termination choices

Typical Applications:

- ♦ Environmental Controls
- ♦ Marine
- ♦ Food Service
- ♦ Vacuum Cleaners



Dielectric Strength

1000V - live to dead metal parts
and opposite polarity.

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

CA201 - 73

¹
Base Part Number

²
Actuator Style

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY / RATING / TERMINATION

10A 250VAC, 20A 125VAC, 1 1/2 HP 125-250VAC

Single Pole

On-None-Off

On-None-On

Solder Lug

CA200

CB200

.250 Tab

CA201

CB201

Screw Term.

CA204

CB204

Wire Leads

CA205

CB205

2 ACTUATOR STYLE ¹

BAT

unsealed

73

sealed

78

toggle length


0.687





bushing length



0.465

Notes:

¹ Additional toggle styles available. Consult factory.

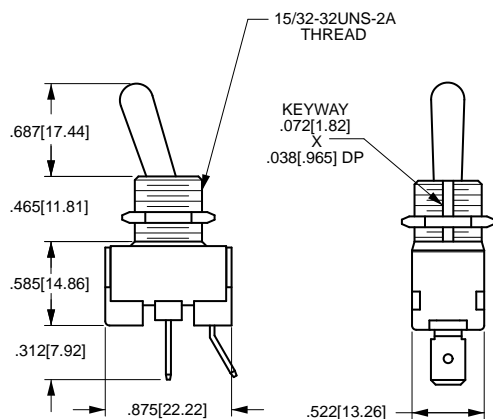

	
SOLDER LUG	.250 TAB (Q.C.)
TERMINAL TYPE	
	
SCREW (ASSEMBLED)	WIRE LEAD



D-Series

SINGLE POLE TOGGLE SWITCHES

The D-Series single pole compact high current toggle switches are ideal for applications with back panel size constraints. These switches feature self-cleaning contacts and ratings up to 20A 125VAC, 10A 250VAC, 1 1/2 HP 125-250VAC. With an economical double insulated all nylon construction, these switches figure prominently in markets with stringent current carrying requirements.



Product Highlights:

- ♦ Compact all nylon double insulated construction
- ♦ Ratings to 20A 125VAC, 1.5 HP 125-250VAC
- ♦ Integrated wire lead construction
- ♦ Paddle or Bat style actuators

Typical Applications:

- ♦ Environmental Controls
- ♦ Marine
- ♦ Food Service
- ♦ Vacuum Cleaners



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity
TUV: 4000V - live to dead metal
parts; 750V - across open contacts

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0° to 85°C)

DA221 - P - B - B

¹
Base Part Number

²
Actuator
Style

³
Actuator
Color

⁴
Bushing
Color

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION

10A 250VAC, 20A 125VAC, 1 1/2 HP 125-250VAC

	Solder Lug	.250 Tab	Wire Leads
On-None-Off	DA220	DA221	DA225
On-None-On	DB220	DB221	DB225
On-Off-On	DC220	DC221	DC225

**5A 250VAC, 10A 125VAC, 1/2 HP 125-250VAC,
4(4) 250VAC_u TUV approved**

	Wire Leads	Solder Lugs	.250 Tabs
On-None-Off	DA945	DA940	DA941

2 ACTUATOR STYLE

B Bat

P Paddle

3 ACTUATOR COLOR ²

B Black

W White


4 BUSHING COLOR ²

B Black

W White

Notes:

- 1 DA945 available with wire leads and ON-OFF circuit only.
2 Additional colors available. Please consult factory.

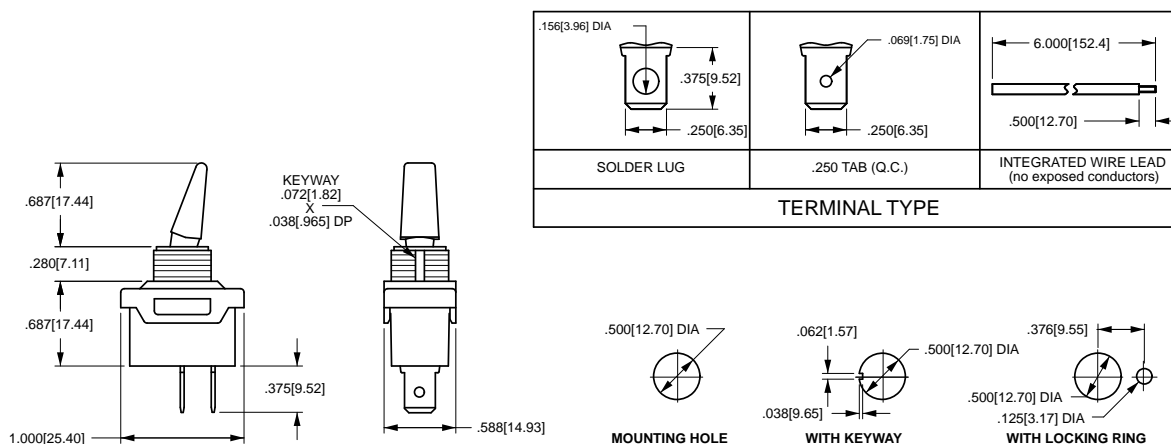

110-Series

HEAVY ACTION TOGGLE SWITCHES

The 110-Series is a compactly designed, versatile metal construction toggle switch which is appropriate for a variety of uses. Features include single or double pole options, maintained or momentary construction with termination choices including solder lug end or bottom, wire leads and .250 tab terminals. The quick make/quick break contact mechanism makes the switch suitable for high voltage (125-250 volt) applications.



Product Highlights:

- ♦ 125/250V AC or DC rated
- ♦ Compact space saving envelope
- ♦ Single or double pole
- ♦ 2 position Maintained or Momentary circuits

Typical Applications:

- ♦ Small Appliance
- ♦ Floor Maintenance
- ♦ Lighting



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

110-S - 73

¹
Base Part Number

²
Actuator
Style

1 BASE PART NUMBER: SERIES / CIRCUITRY ¹ / RATING / TERMINATION ²**3A 250V, 6A 125V, AC/DC**

	Solder Lug (end)	Solder Lug (bottom)	Screw Terminals	Wire Leads
Single Pole				
On-None-Off	110	110-B	110-S	111-16
Off-None-(On)	110-M-NO	110-BM-NO	110-SM-NO	111-16M-NO
On-None-(Off)	110-M-NC	110-BM-NC	110-SM-NC	111-16M-NC
Double Pole				
On-None-Off	2BK62	-	-	2BK65
On-None-On	2BL62	-	-	2BL65

1A 250V, 3A 125V, AC/DC

Single Pole				
On-None-On	112	-	-	112-A
On-None-(On)	112-M	-	-	112-M-A
Double Pole				
On-None-Off	216	-	-	216A
Off-None-(On)	216-M-NO	-	-	216A-M-ANO
On-None-(Off)	216-M-NC	-	-	216A-M-ANC
On-None-On	316	316-B	-	-
On-None-(On)	316-M	316-BM	-	-
2 circuit				
1 On - 1 Off	516	516-B	-	516-A
1 (On) - 1 (Off)	516-M	516-BM	-	516-AM

6A 120VAC

Single Pole				
On-None-On	2BB62	-	-	2BB65

5A 250V, 10A 125V, 1/4HP, 125V

Single Pole				
On-None-Off	160H	160H-B	160H-S	160H-A

**2 ACTUATOR STYLE
BAT STYLE TOGGLE**



unsealed	sealed	toggle length	bushing length
52	57	0.375	0.343
63	68	0.500	0.465
73	78	0.687	0.46555

BALL STYLE TOGGLE

unsealed	sealed	toggle length	bushing length
21	-	0.375	0.250
22	-	0.375	0.343
25	-	0.375	0.875

Notes:

- 1 Momentary function only available with 73 toggles.
2 160H and 110-Series are available with .250 tab terminals. Add suffix /TABS to end of part number. ex. 110-73/TABS
() Indicates momentary function.

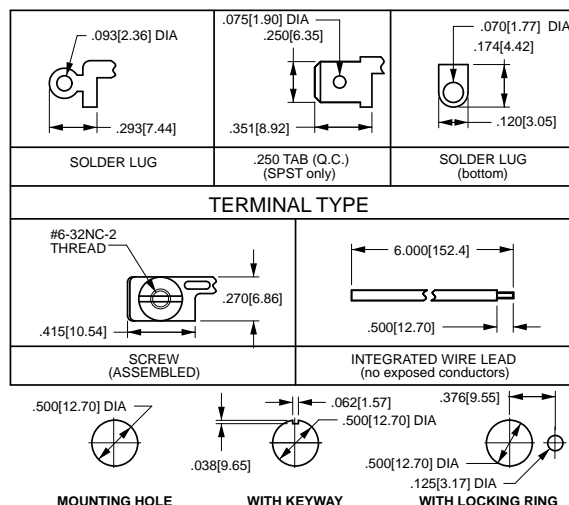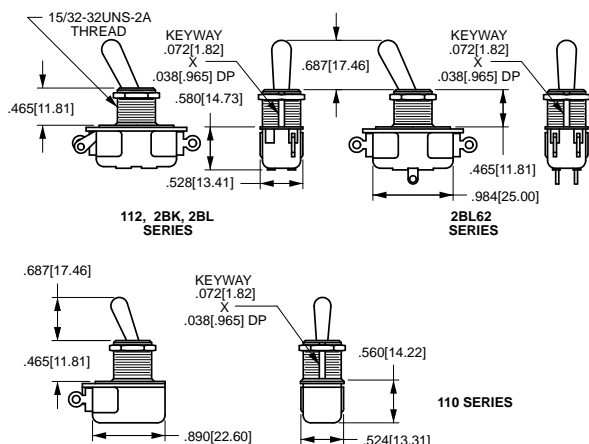

DK/EK

DK/EK-Series

HEAVY DUTY TOGGLE SWITCHES

The switch that can handle your heavy duty requirements. Single or double pole with wire lead or screw terminations, and ratings to 20A 125V 10A 250V, the ac/dc DK/EK-Series is the most heavy duty toggle switch in the Carling line. Its sturdy metal construction and stiff actuation force will withstand the abuses of virtually any stringent application. The quick make/quick break contact mechanism is ideal for high voltage DC applications.



Product Highlights:

- ♦ Ratings up to 20A 125V AC or DC
- ♦ Screw Term or Wire Lead terminations
- ♦ Quick Make / Quick Break contact mechanism
- ♦ Bat or Ball style toggle options

Typical Applications:

- ♦ Industrial Motor Control
- ♦ General Purpose



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

DK284 - 73

¹
Base Part Number

²
Actuator
Style

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY / RATING / TERMINATION

8A 250V, 16A 125V, 1 HP 125-250V
Screw Terminals Wire Leads

Single Pole
On-None-Off **DA284** **DA285**

Double Pole
On-None-Off **DK284** **DK285**

10A 250V, 20A 125V, 1 1/2 HP 125-250V
Screw Terminals Wire Leads

Single Pole
On-None-Off **EA204** **EA205**

Double Pole
On-None-Off **EK204** **EK205**

2 ACTUATOR STYLE ¹**BAT STYLE TOGGLE**




unsealed toggle length bushing length
73 0.687 0.465

BALL STYLE TOGGLE

unsealed toggle length bushing length
32 0.500 0.343

Notes:

1 Additional toggle lengths available. Consult factory for details.

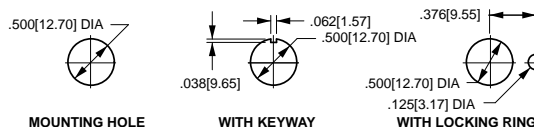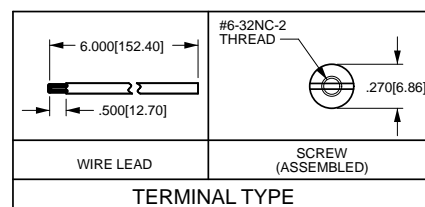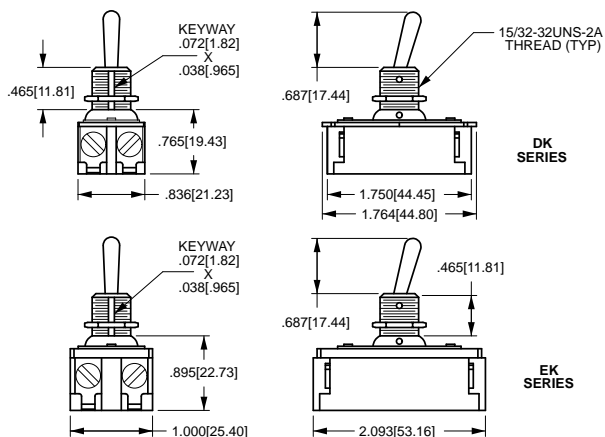

MAAOA/215

MAAOA/215-Series TOGGLE SWITCHES

The MAAOA/215-Series toggle switches are single pole, AC rated at 20 amps and 125 VAC. These switches are snap-in mounted, with a phenolic toggle and base, and are suitable for high ambient temperature applications.



Product Highlights:

- ♦ High temperature Phenolic base and toggle
- ♦ Ratings to 125VAC
- ♦ Optional embossed On-Off legend
- ♦ Choice of screw, .250 Tab or integrated wire lead connections

Typical Applications:

- ♦ Coffee Makers
- ♦ Food Warmers



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

MAAOA

-

BL

/

ON-OFF

1

Base Part Number

2

Color

3

Legend

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION

	.250 Tabs	Screw Terms.	Wire Leads
Single Pole			
On-Off	MAAOA	215	215A
(On)-Off	MM-021	-	-


2 BASE & ACTUATOR COLOR

BL	Black	BN	Brown
----	-------	----	-------

3 LEGEND¹

On-Off

Notes:
Panel Cut-Out recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 Imprinting is available. ON-OFF legend is not standard and must be specified after color. If not specified, switch will be manufactured with no legend.
() Indicates momentary function.

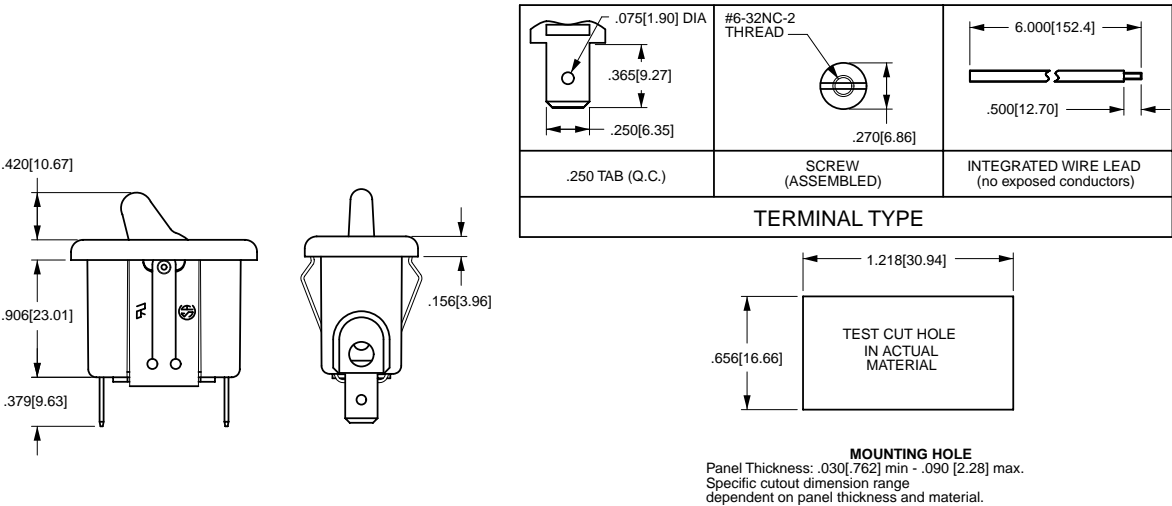

Carling Technologies full or half hexboot is the perfect complement to Carling's line of toggle switches. The boot is compatible with 15/32" threaded bushings and will provide extra protection against the elements in harsh environments.

Product Highlights:


- Flexible tear-resistant silicone rubber overmolded onto a 15/32" brass hexnut
- Full hexboot completely covers toggle actuator and bushing
- Meets ROHS 2011/65/EU directive
- Inhibits the rotation of switches subjected to low frequency vibration
- Complementary, cost effective addition to Carling's toggle switches
- Suitable for toggle models: F-Series, G-Series, 110-Series, C-Series, D-Series, DK/EK-Series, H/I-Series, LT-Series

Full Hexboot



Part #: 999-37246-001


Half Hexboot

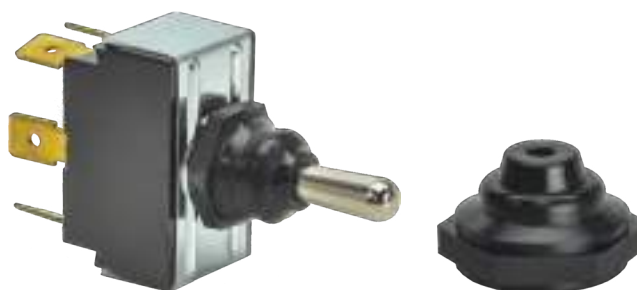


Part #: 999-37245-001

Dimensional Specifications: in. [mm]

Full Hexboot

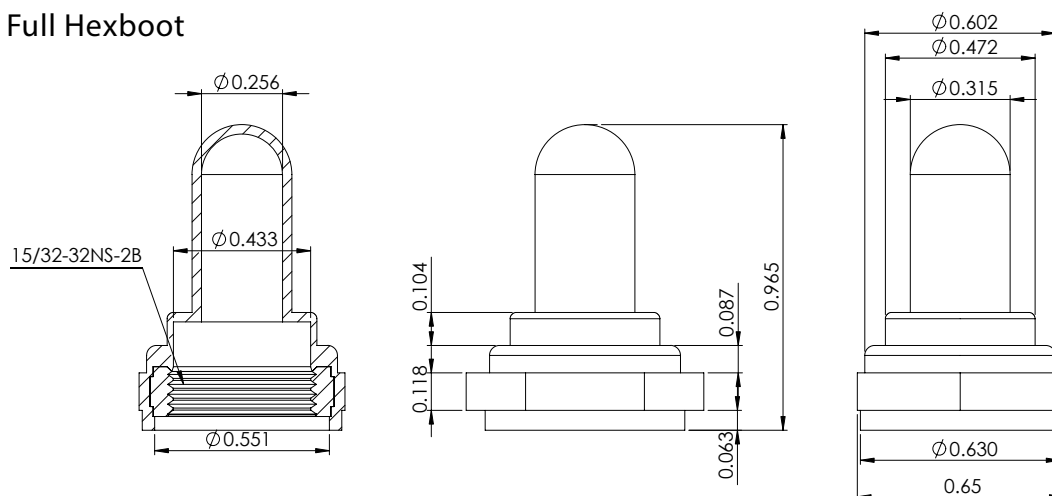


Half Hexboot

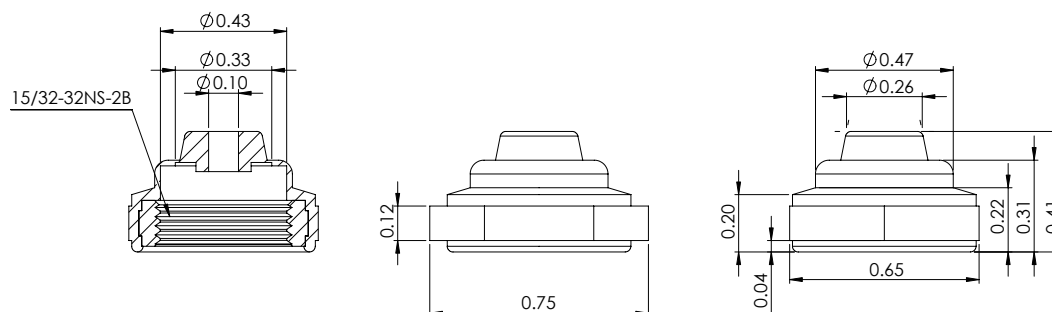


Bushing Accessories

The hardware options and accessories listed below were specifically designed to be used with toggle and pushbutton switches. The drawings are representative of the actual products. When other hardware options are required, please consult factory.




STANDARD HEXNUT

.562 in. [14.27 mm] X .076 in. [1.93 mm]
NICKEL: 380-08602
BLACK: 380-08606

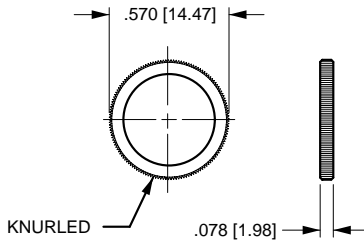


STANDARD FACENUT

.570 in. [14.47 mm] X .078 in. [1.98 mm]
NICKEL: 380-08693
BLACK: 380-08694

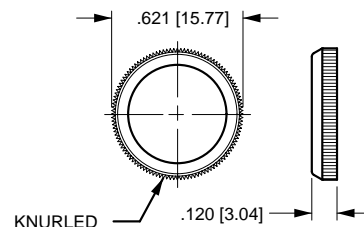


PLASTIC FACENUT

(Wrench Supplied N/C)
.625 in. [15.87 mm] X .120 in. [3.04 mm]
BLACK: 384-17126-001
RED: 384-17126-002
WHITE: 384-17126-003

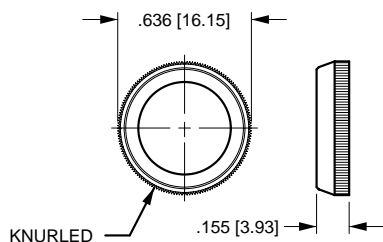


DRESS FACENUT

.636 in. [16.15 mm] X .155 in. [3.93 mm]
NICKEL: 380-08810
BLACK: 380-08811



LOCKWASHER


NICKEL-PLATED: 728-15907




LOCKING RING

ZINC: 728-15946
BLACK: 728-15947


All indicator plates are nickel-plated steel. Odd keyway locations, alternate imprints and plating available on special order. Contact factory for minimum quantities and specifications.




YO1
272-06747




YO2
272-06764




Y51
272-06842



Y101
272-06935



Y311
272-07258



Y500
272-07293


ALL PLATES SHOWN FIT 15/32" (.465 [11.81]) BUSHINGS

16-3P

16-3P-Series

PUSHBUTTON SWITCHES

The 16-3P-Series pushbutton switches are single pole and AC rated up to 3 amps. These momentary action switches have a slow-make, slow-break contact mechanism and require only light actuation force (4 oz. - 1 lb.). These switches are typically used in general purpose applications requiring finger actuation.

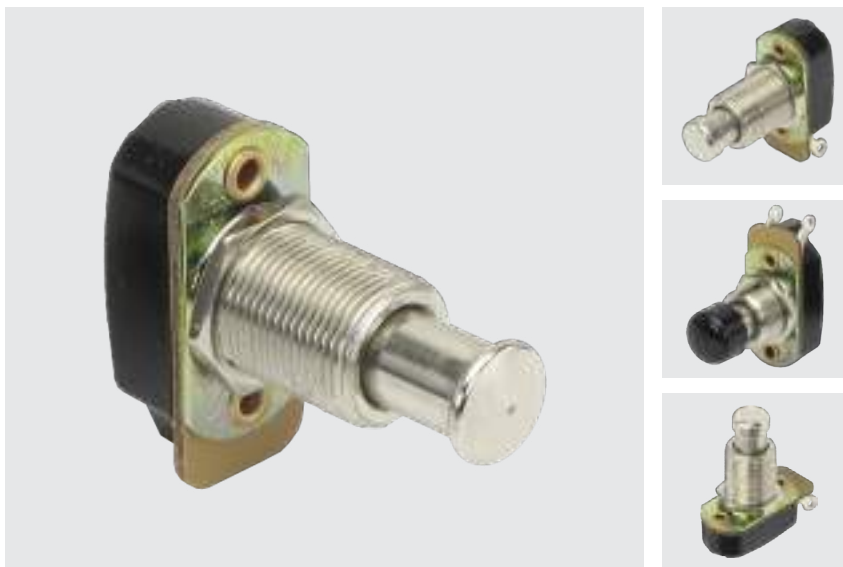

Product Highlights:

- ♦ Maintained, Momentary and 2 circuit function choices
- ♦ Available with optional overtravel plunger action
- ♦ Light 4 oz – 1 lb actuation force
- ♦ Metal plunger available with optional colored plastic cap

Typical Applications:

- ♦ Test & Measurement
- ♦ Audio Visual



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

16-3POFF - 4 - CBL

¹
Base Part Number

²
Bushing

³
Actuator Style

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY / RATING / TERMINATION**Single Pole**

Solder Lug

Wire Leads

3A 125VAC

Off-(On)

Off-(On) with overtravel ¹

On-(Off)

16-3P Off

16-3P Off-Ov

16-3P On

16-3AP Off

16-3AP Off-Ov

16-3AP On

1A 125VAC

On-On

On-On with overtravel ¹

1 On-1 Off (2 circuit)

1 On-1 Off with overtravel ¹ (2 circuit)

116-P

116-P-OV

516-P

516-P-OV

116-AP


116-AP-OV



516-AP


516-AP-OV

2 BUSHING STYLE**2** .312 length**4** .562 length**3 ACTUATOR STYLE ²****CBL** black plastic color cap**CRD** red plastic color cap**Notes:**¹ Overtravel only available with #4 bushing.² When selection 3 is left blank, a standard nickel plated plunger is supplied.

() Indicates momentary function.

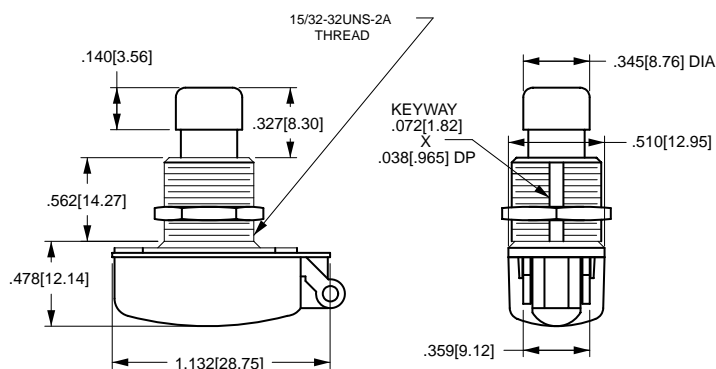

	
SOLDER LUG	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE	

**MOUNTING HOLE****WITH KEYWAY**

170/172-Series

PUSHBUTTON SWITCHES

The 170/172-Series pushbutton switches are single pole, high amperage switches suitable for shallow back panel applications. These switches are momentary action and require an actuation force of 2.5 lbs. The 170/172-Series switches are equipped with a slow-make, slow-break contact mechanism and are rated at 15 amps at 125VAC.



Product Highlights:

- ♦ Rated to 15A 125VAC
- ♦ Sturdy metal clad construction
- ♦ Metal plunger available with optional colored plastic cap
- ♦ Momentary On or Momentary Off circuitry

Typical Applications:

- ♦ Test & Measurement
- ♦ Meters
- ♦ Horns



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

25,000 cycles - Momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

172 - **CBL**

¹
Base Part Number

²
Cap Style/Color

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY /**RATING / TERMINATION**

10A 250VAC; 15A 125VAC

Single Pole

On-(Off)

Off-(On)

Solder Lug

170-B

172-B

Wire Leads

170-A

172-A

Screw Terms.

170

172

2 CAP STYLE / COLOR ¹

CBL

Black Plastic

CGN

Green Plastic

CRD

Red Plastic


CWH

White Plastic

Notes:

¹ When selection 2 is left blank, a standard nickel plated plunger is supplied.

() Indicates momentary function.

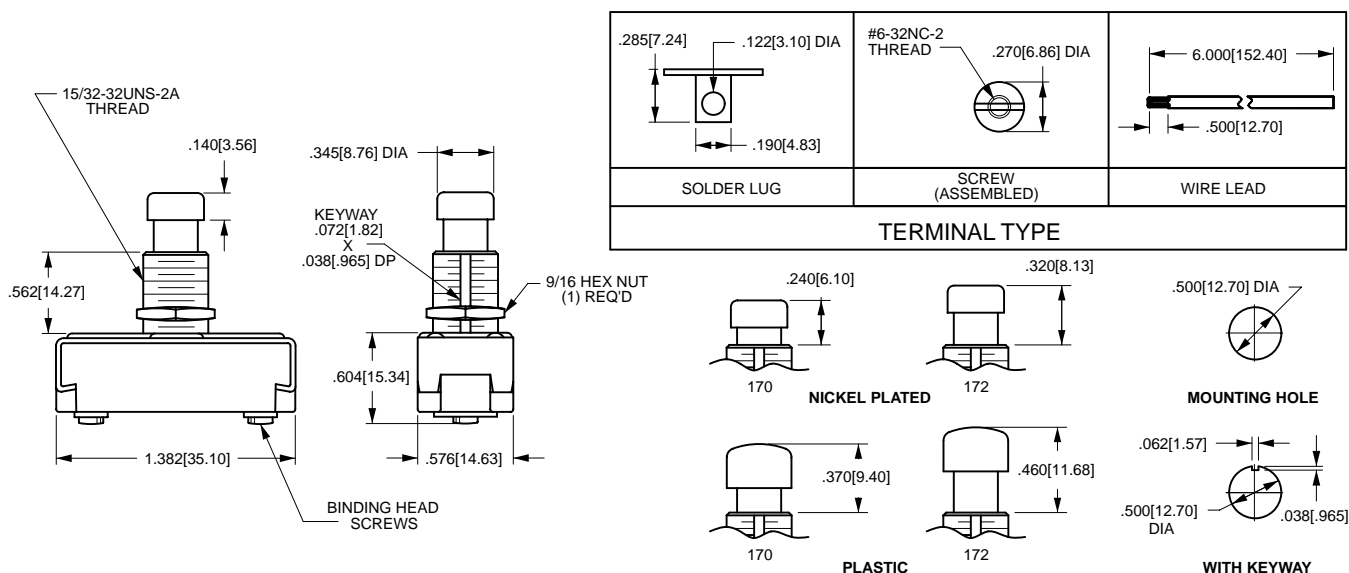

P26-Series

PUSHBUTTON SWITCHES

The P26-Series pushbutton switches are single pole, AC rated for 8 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism.



Product Highlights:

- ♦ 6A 125VAC, 3A 277VAC rated
- ♦ Momentary On or Momentary Off circuitry
- ♦ 4 bushing size combinations
- ♦ Round Metal, Concave Metal and Nylon Style Actuators

Typical Applications:

- ♦ Intercoms
- ♦ Security System
- ♦ Electronic Signs
- ♦ Marine



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

P26L - 1D - BL

¹ Base Part Number ² Bushing Style ³ Button Style/Color

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY / RATING / TERMINATION

Single Pole	Solder Lug	.250 Tab	Wire Leads
3A 250VAC, 6A 125 VAC, 3/4A 125V			
Off - (On)	P26A	P26B	P26F
On - (Off)	P26L	-	P26T
3A 277VAC, 6A 125 VAC ¹			
Off - (On)	P267A	P267B	P267F
On - (Off)	P267L	-	P267T

2 BUSHING STYLE


	length	diameter
1A	.406	.375
1B	.406	.468
1C	.465	.375
1D ³	.465	.468

3 BUTTON STYLE / COLOR

BL	Black Nylon
RD	Red Nylon
RND MTL ²	Round Metal
CON MTL ²	Concave Metal

Notes:

- Additional ratings available. Consult factory for details
 - Only available with 1D bushing in .562 length
 - Length is .562 for RND MTL and CON MTL buttons
- () Indicates momentary function.

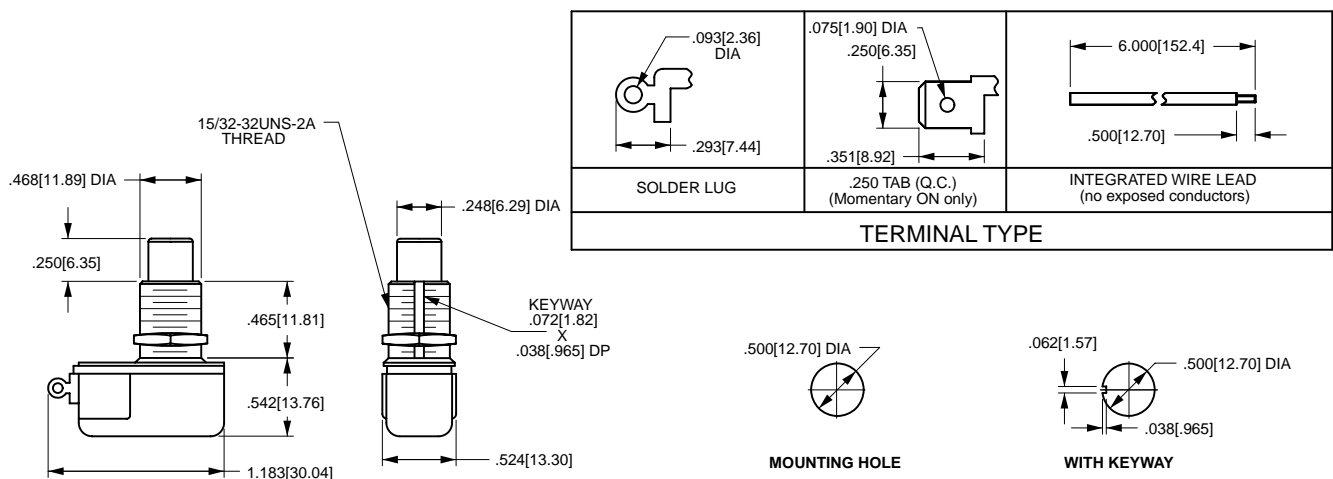

P27-Series

PUSHBUTTON SWITCHES

The P27-Series pushbutton switches are single pole, AC rated switches suitable for general purpose applications with a shallow back panel. These switches are momentary action with a medium actuation force (26 oz. typical). The P27-Series switch is equipped with a slow-make, slow-break contact mechanism, rated at 6 amps with a nylon concave pushbutton.



Product Highlights:

- ♦ Ratings to 6A 125VAC 3A 277VAC
- ♦ Momentary On or Momentary Off circuitry
- ♦ .250 Tab, Solder Lug or Wire Lead terminations
- ♦ Shallow space saving envelope

Typical Applications:

- ♦ Intercoms
- ♦ Security System
- ♦ Electronic Signs
- ♦ Marine



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

P27A - BL

1
Base Part Number

2
Button Color

1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY /
RATING / TERMINATION
Single Pole
3A 250VAC, 6A 125 VAC, 3/4A 125V
Off - (On)
On - (Off)

Solder Lug
P27A
P27L


.250 Tab
P27B
-

Wire Leads
P27F
P27T

3 BUTTON STYLE / COLOR

BL Black
RD Red
WH White

Notes:
() Indicates momentary function.

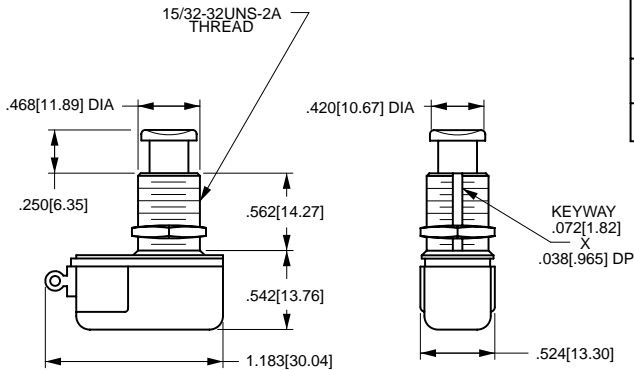

 .093[2.36] DIA .293[7.44]	 .075[1.90] DIA .250[6.35] .351[8.92]	 6.000[152.4] .500[12.70]
SOLDER LUG	.250 TAB (Q.C.) (Momentary ON only)	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE		



641-Series

PUSHBUTTON SWITCHES

The single, double and triple pole 641-Series represents the most compact offerings of the Carling's pushbutton switch line. These switches are UL approved and meet ENEC spacing requirements. Additionally, the new 3-pole switch affords the versatility to control an extra function or indicator light. Rugged metal construction, self-cleaning contacts and stiff actuation force (3-3 1/2 lbs. typical) have made these switches ideal for most "foot pedal" type applications. These alternate action switches fit a standard .500" mounting hole with options of solder lug, wire lead and PC terminals.



Resources:

Download 3D CAD Files

IGS >

STP >

Product Highlights:

- Available in 1-3 poles
- 3+ lbs. actuation force ideal for Foot pedal applications
- Solder Lug, Wire Lead or PC Terminal options
- Self-cleaning wiping style contacts

Typical Applications:

- Music Equipment
- Test & Measurement Devices
- Audio-Visual Equipment
- Appliances



Electrical

Rating	5A 125VAC, 2A 250VAC
Dielectric Strength	1500V RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 Milli Ohm max @ 4Vdc
Electrical Life	50,000 Cycles
Terminals	Solder Lug, Wire Leads and PC

Mechanical

Mechanical Life	100,000 Cycles
-----------------	----------------

Environmental

Vibration Sinusoidal	Mil STD 202G, Method 204D, Test Condition A 0.06DA or 10G's 10-500Hz
Shock	MIL-STD 2020G, Method 213B Test Condition K, 30G's
Handling Shock	1 Meter Drop onto Hard Surface, all surfaces and planes
Thermal Shock	MIL-STD 2020G, Method 107G Test Condition A -55 C to 85 C
Moisture Resistance	MIL-STD 2020G, Method 106F 10 25 C to 65 C Cycles 95% RH
Thermal Cycling	25 Cycles -40 C to 85 C
Operating Temperature	32°F to 185°F (0°C to +85°C)

Physical

Function Circuits	Three Pole Single Throw, TPST Three Pole Double Throw, TPDT
Operation	Alternate Action, Push ON, Push OFF
Button Travel	0.19 (4.83mm)
Actuation Force	3 to 5 LB, 1360 to 2268 g
Base	Polyester, PBT Glass Filled
Button	Brass, Nickel Plated
Bushing	Brass, Nickel Plated
Plunger	Brass, Nickel Plated
Top Plate	Stainless Steel
Actuator (Internal)	Nylon 6/6
Pin (Internal) ¹	Nylon 6/6
Driver	Cold Rolled Steel
Springs	Music Wire
Movable Contact	Copper
Terminals	Brass (tin plated)
Mounting	½" Dia. Hole, with and without keyway, or with locking ring

Safety & Regulation

Agency	UL 61058, EN 61058 (3 Pole Version) UL 1054 (1 & 2 Pole Version)
Materials	RoHS, REACH

64111210

¹
Part Number

1 PART NUMBER: SERIES / POLES / CIRCUITRY / RATING / TERMINATION ¹

One Pole

2A 250VAC, 5A 125VAC

solder lug	PC term.	wire leads.	
64111210	64111212	64111215	ON-OFF
64111220	64111222	64111225	ON-ON

Two Pole

solder lug	PC term.	wire leads
64112210	64112212	64112215
64112220	64112222	64112225




Three Pole

solder lug	PC term.	wire leads
64113210	64113212	64113215
64113220	64113222	64113225


Notes:

1 For 1 and 2 pole only. 3 Pole switches use brass Pin

1 OR 2 POLE SHOWN WITH SOLDER LUG

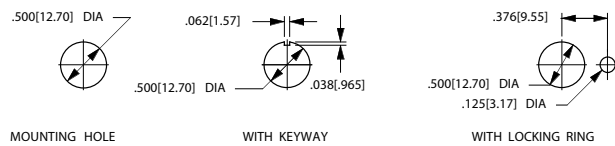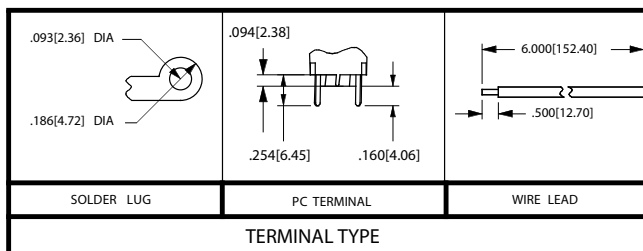
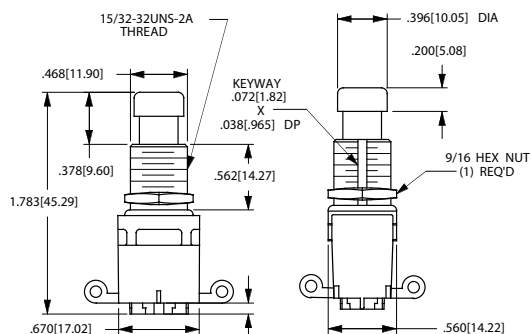


3 POLE SHOWN WITH SOLDER LUG

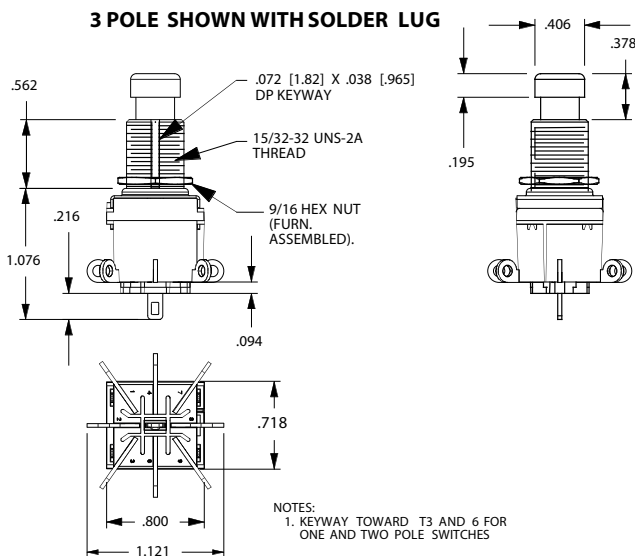


NOTES:
1. KEYWAY TOWARD T3 AND 6 FOR ONE AND TWO POLE SWITCHES
2. KEYWAY TOWARD T4 FOR THREE POLE SWITCHES.

3 POLE SHOWN WITH PC TERMINAL

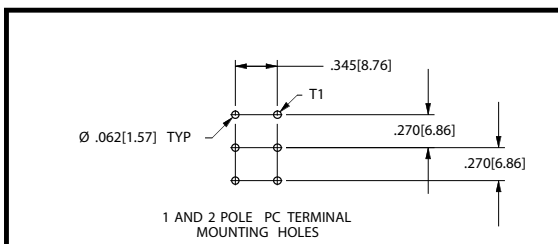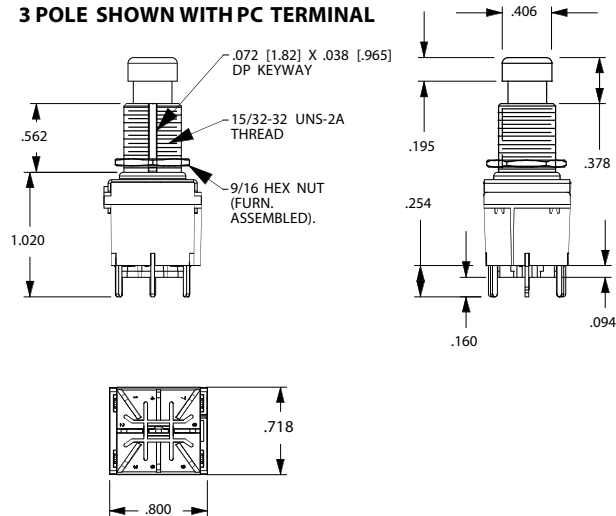

1 AND 2 POLE PC TERMINAL MOUNTING HOLES

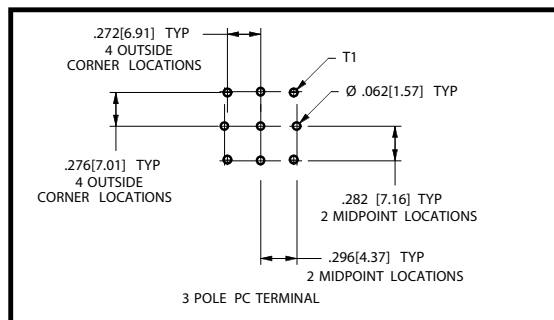

110-Series

PUSHBUTTON SWITCHES

The 110-Series provides a compact yet rugged solution to general purpose switch needs. Alternate action, metal construction and stiff (6-8 lb) actuation force have combined to make this switch a pillar in a variety of markets. This versatile switch is available in maintained and momentary circuits with a variety of termination and rating options.



Product Highlights:

- ♦ Ratings to 5A 250V, 10A 125V AC or DC
- ♦ Maintained or momentary circuitry
- ♦ On-Off, On-On and 2 circuit function options
- ♦ Choice of 4 different termination options

Typical Applications:

- ♦ Music Industry
- ♦ Audio/Visual
- ♦ Electronic Road Signs



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)


110-P

¹
Part Number









1 PART NUMBER: SERIES / ACTUATOR / CIRCUITRY / RATING / TERMINATION

	solder lug (end)	solder lug (bottom)	screw terminals	wire leads
Single Pole				
3A 250V, 6A 125V				
OFF-ON	110-P	110-BP	110-SP	111-16-P
OFF-(ON)	110-PM-OFF	110-PBM-OFF	110-SPM-OFF	111-PM-OFF
ON-(OFF)	110-PM-ON	110-PBM-ON	110-SPM-ON	111-PM-ON
5A 250V, 10A 125V, 1/4 HP 125V				
OFF-ON	160H-P	160H-BP	160H-SP	160H-AP
1A 250V, 3A 125V				
ON-ON	112-P	-	-	112-PA
ON-(ON)	112-PM	-	-	112-PAM
Double Pole				
1A 250V, 3A 125V				
OFF-ON	216-PP	-	-	216-PPA
OFF-(ON)	216-PM-OFF	-	-	216-PAM-OFF
ON-(OFF)	216-PM-ON	-	-	216-PAM-ON
ON-ON	316-PP	-	-	316-PPA
ON-(ON)	316-PM	-	-	316-PAM
1 ON - 1 OFF (2 circuit)	516-PP	-	-	516-PPA
1 (ON) - 1 (OFF) (2 circuit)	516-PM	-	-	516-PAM

Notes:
() Indicates momentary function.

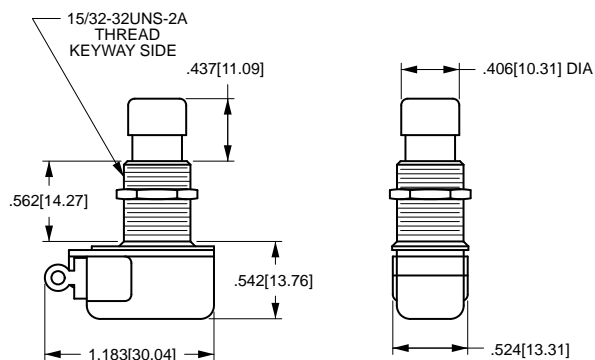


NOTE:
KEYWAY
.072[1.82] X .038[.965] DP

 .093[2.36] DIA .293[7.44]	 .075[1.90] DIA .250[6.35] .351[8.92]	 .070[1.77] DIA .174[4.42] .120[3.05]
SOLDER LUG	.250 TAB (Q.C.) (SPST only)	SOLDER LUG (bottom)
TERMINAL TYPE		
 .270[6.85] .080[2.03] DIA	 #6-32NC-2 THREAD .270[6.86] .415[10.54]	 6.000[152.4] .500[12.70]
END TERMINAL	SCREW (ASSEMBLED) (SPST ONLY)	INTEGRATED WIRE LEAD (no exposed conductors)
 .500[12.70] DIA	 .062[1.57] .500[12.70] DIA .038[9.65]	
MOUNTING HOLE	WITH KEYWAY	

P-Series

PUSHBUTTON SWITCHES

These rugged pushbutton-type switches feature international approvals, ratings to 20A 125VAC and a heavy actuation force (3-5 lbs. typical) which makes this switch ideal for use as a “foot-pedal” switch. The metal bushing and plunger construction enables this alternate action switch to withstand the rigors of most any stringent pushbutton application.

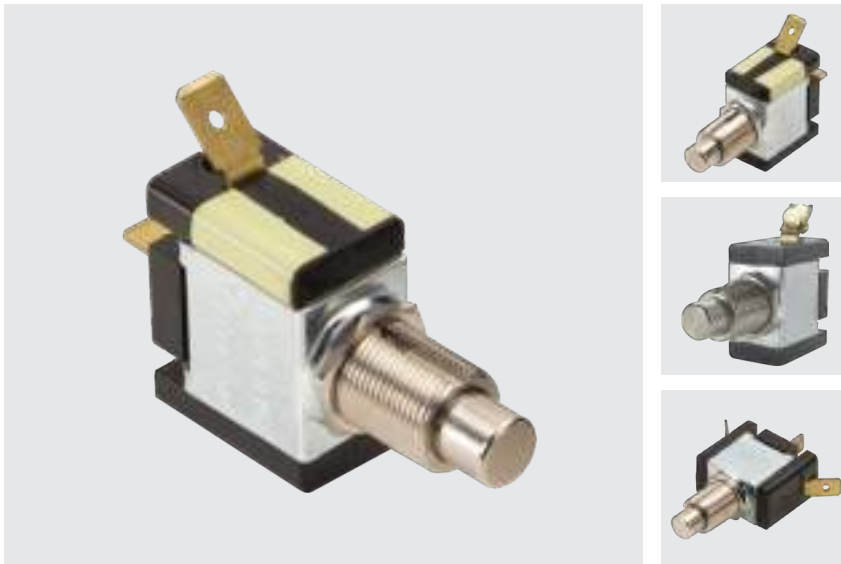

Product Highlights:

- ♦ Rugged metal clad construction ideal for foot pedal applications
- ♦ Ratings to 20A 125VAC
- ♦ UL, CSA and TUV approvals
- ♦ Maintained On-Off or On-ON circuitry

Typical Applications:

- ♦ Vacuum Cleaners



Dielectric Strength

UL/CSA: 1000 - live to dead
metal parts & opposite polarity
TUV: 4000V - live to dead metal
parts; 1250V - opposite polarity
across open contacts

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

0°F to 85°F (32°C to 85°C)

PA341


¹
Part Number

1 PART NUMBER: SERIES / ACTUATOR / CIRCUITRY / RATING / TERMINATION


	.250 Tab	Screw Terms.	Wire Leads
10A 250VAC, 15A 125VAC, 3/4 HP 120-240 VAC ¹			
On-Off	PA341	PA344	PA345
On-On	PB341	PB344	PB345
10A 250VAC, 20A 125VAC, 1 1/2 HP 120-240 VAC ¹			
On-Off	PA301	PA304	PA305
On-On	PB301	PB304	PB305
10A 250VAC, 15A 125VAC, 10(6)a 250 VACu, T85 ²			
On-Off	PA951	PA954	PA955

Notes:

- ¹ Additional ratings available. Consult factory.
² UL, CSA & TUV approved.

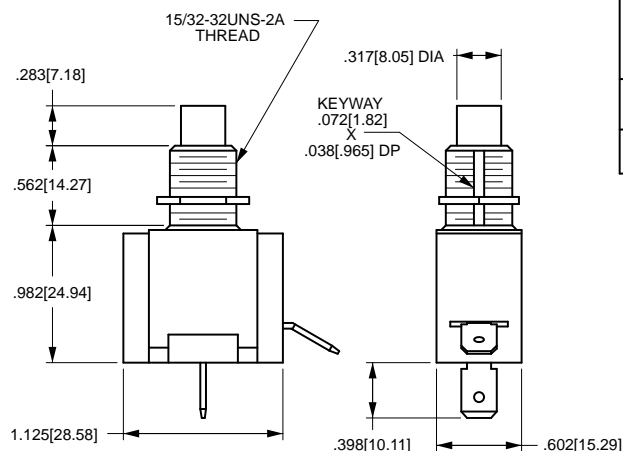


.250 TAB (Q.C.)	SCREW (ASSEMBLED)	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE		

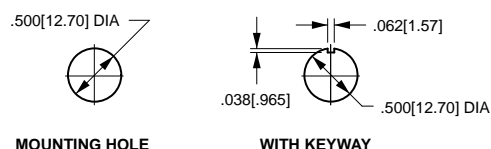

PP-Series

PUSHBUTTON SWITCHES

The PP-Series plastic pushbutton switches are heavy duty, single pole switches with wire leads. They are alternate action, available in single throw construction, with AC ratings up to 15 amps. Both bushing and bracket are made out of nylon. These high current switches are popular within the Appliance market.

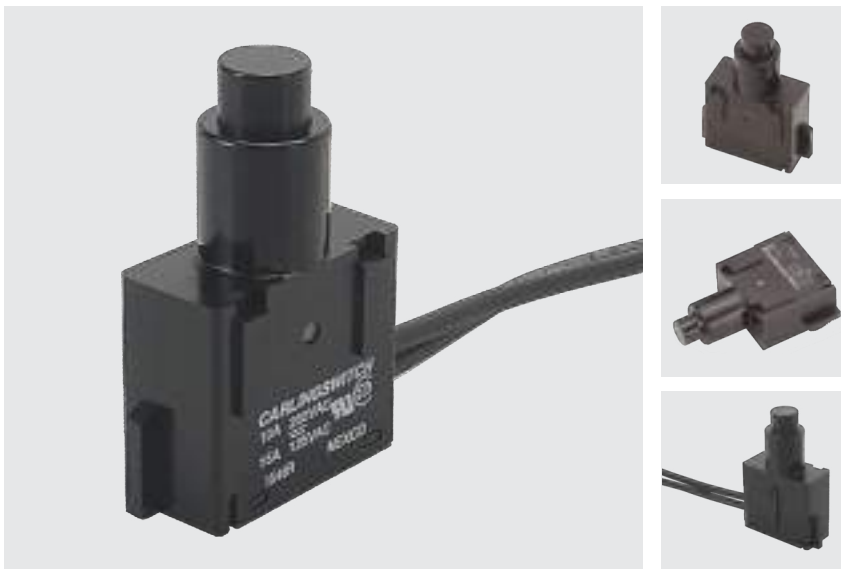

Product Highlights:

- ♦ Ratings to 15A 125VAC
- ♦ All nylon construction
- ♦ Stiff actuation force suitable for foot pedal applications
- ♦ Integrated wire lead termination

Typical Applications:

- ♦ Vacuum Cleaners



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

PPA525-AC

¹
Part Number

1 PART NUMBER: SERIES / ACTUATOR / CIRCUITRY / RATING / TERMINATION

10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC

On-Off



10A 250VAC, 15A 125VAC

On-Off

Wire Leads

PPA525-AC

PAA515-AC

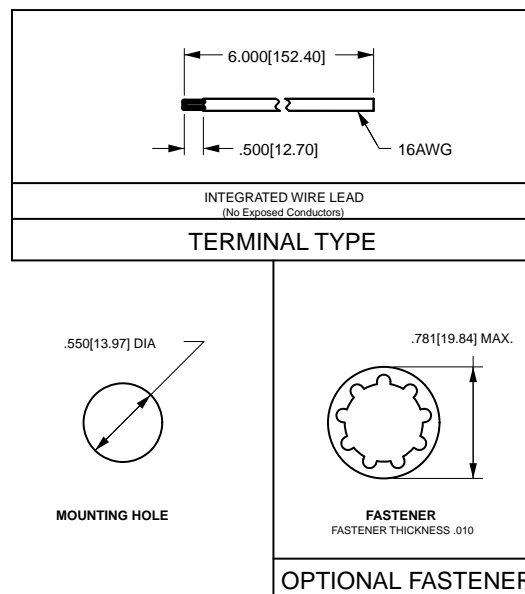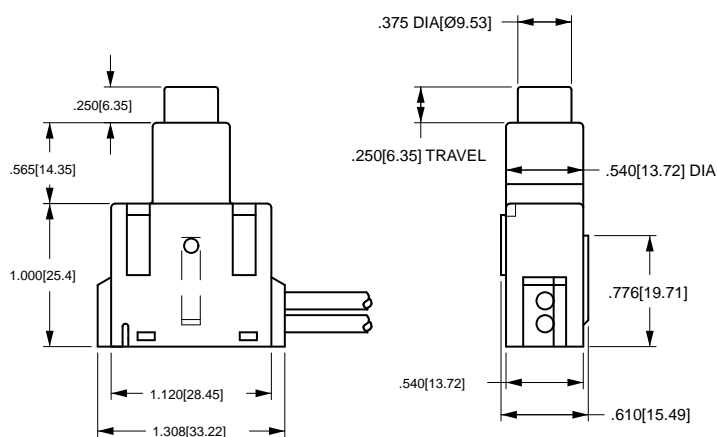

R135-Series

ROTARY SWITCHES

The R135 and R135A-Series rotary switches are single pole, single throw “L” rated up to 3A, feature an ON-OFF repeating action, and are available with a nylon actuating knob; nylon snap-in bracket or nickel-plated brass bushing. These switches are typically used to control lighting functions.



Product Highlights:

- ♦ 3A 125VAC “L” rating to control lighting
- ♦ Off-On repeating action circuitry
- ♦ Integrated wire lead termination
- ♦ Bushing or snap in mounting styles

Typical Applications:

- ♦ Appliance
- ♦ HVAC



Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts

Electrical Life

100,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

R135-A - BL

¹
Base Part Number

²
Knob Color

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING / TERMINATION

1.5A 250 VAC; 3A 125 VAC L; 5A 12 VDC

OFF-ON repeating
OFF-ON repeating

.375 threaded bushing
nylon snap-in bezel

Wire Leads

R135
R135-A

2 KNOB COLOR ¹


BL
WH

Black
White

Notes:

Standard Wire Leads are 6" long, stripped 1/2" black. If different length required, please specify at the end of the part number. ex. R135-A-BL/20". Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. Burr on bottom. Test cut hole in actual material.

¹ Custom colors available. Consult factory.

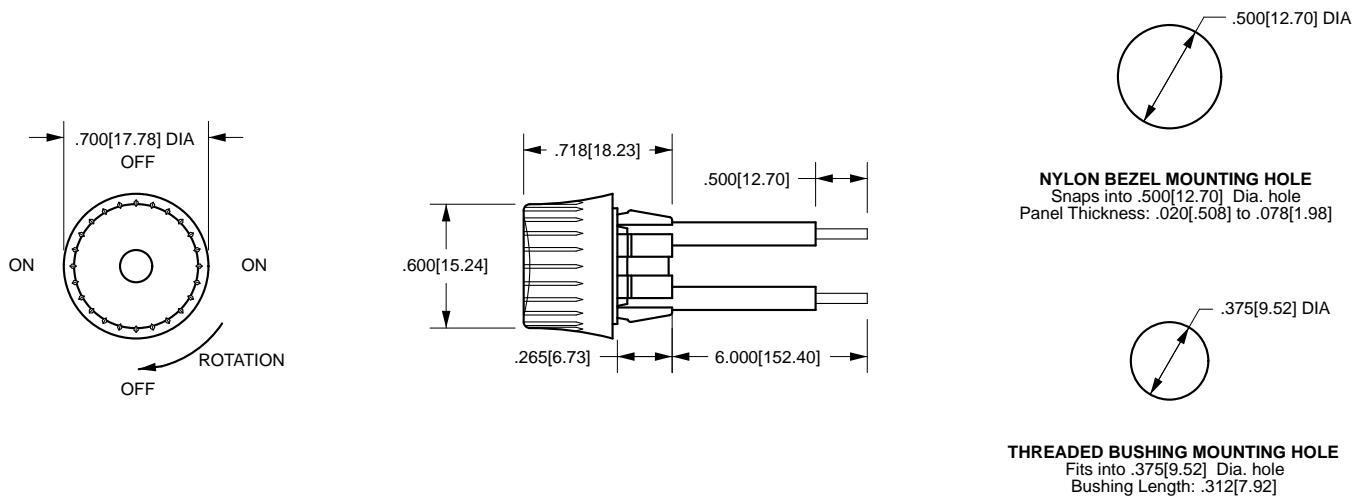

700/800-Series

ROTARY SWITCHES

The 700 and 800-Series are single pole multi-position, general purpose rotary switches. These switches feature a nylon actuator in a metal clad construction along with a self-cleaning silver plated contact design. The 700 and 800-Series are typically used in applications requiring multi-position speed controls, such as electric fans.



Product Highlights:

- ♦ Ratings to 3A 250VAC, 6A 125VAC
- ♦ Up to 8 available detent positions
- ♦ Double “D” bushing mount
- ♦ Sturdy metal clad construction

Typical Applications:

- ♦ Small Appliance
- ♦ Industrial Control
- ♦ Marine



Dielectric Strength

UL/CSA: 1000V (minimum)

Base Material

Steel/Zinc Plate

Insulation Resistance

100 Megohms (minimum)

Actuator Material

Brass/Nickel Plate

700-1A - BL¹
Base Part Number²
Knob Color**1 BASE PART NUMBER: SERIES / POLES / CIRCUITRY¹ / RATING / TERMINATION²****2A 250VAC; 4A 125VAC; 1A 125V**

Solder Lugs	.250 Tabs	Position 1	Position 2	Position 3	Position 4	
-	700-A	OFF	ON	ON	ON	
700-1	700-1A	OFF	ON	-	-	
700-2	700-2A	OFF	ON	ON	ON	repeating 8 positions
700-3	700-3A	OFF	ON	ON	OFF	
700-4	700-4A	OFF	ON	ON	-	
700-5	700-5A	OFF	ON	OFF	-	
700-6	700-6A	-	ON	OFF	ON	
700-7	700-7A	-	ON	ON	-	
700-8	700-8A	-	ON	ON	ON	
700-9	700-9A	OFF	ON	OFF	ON	

3A 250VAC; 6A 125VAC

Switch Positions

800-2	2 positions
800-3	3 positions
800-4	4 positions
800-5	5 positions
800-6	6 positions
800-7	7 positions
800-8	8 positions







OFF Position

800-A	1st position
800-A2	2nd position
800-A3	3rd position
800-A4	4th position
800-A5	5th position
800-A6	6th position
800-A7	7th position
800-A8	8th position

2 ACTUATOR COLOR
BL Black

Notes:

- 700-2 and 700-2A feature 8 detent positions.
- 800-Series terminal is a combination solder lug and quick connect.

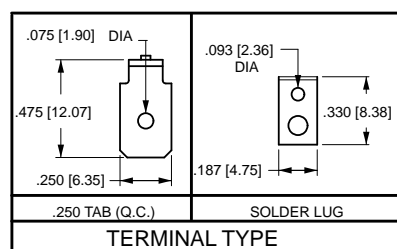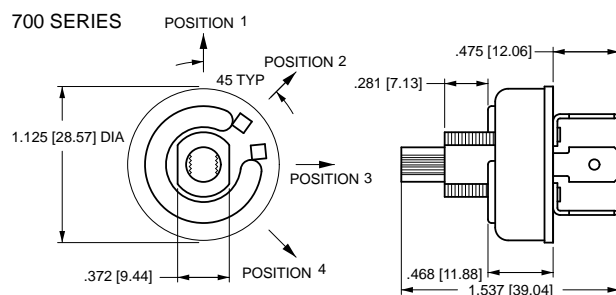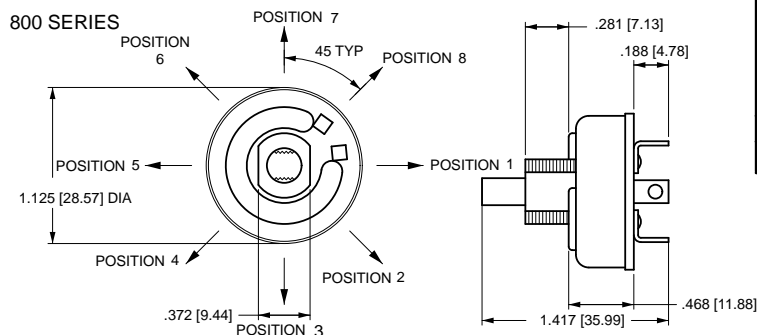700 SERIES**ACTUATOR KNOB****800 SERIES****MOUNTING HOLES**

Notes:


















- Terminal is combination solder lug and quick connect.


















Terminology


















Agency data	UL File #E7560 CSA File # LR9280	
Single Pole (SP)	A switch device that opens, closes or changes connection of a single conductor in an electrical circuit.	
Double Pole (DP)	A switch device that opens, closes or changes connection of two conductors in an electrical circuit.	
Single Throw (ST)	A switch that opens, closes or completes a circuit at only one of the extreme positions of its actuator.	
Double Throw (DT)	A switch that opens, closes or completes a circuit at both extreme positions of its actuator.	
Normally Open (NO)	A momentary switch where one or more circuits are open when the switch actuator is at rest (the normal position.)	
Normally Closed (NC)	A momentary switch where one or more circuits are closed when the switch actuator is at rest (the normal position.)	
Power Rating	A switches current handling capability measured in amperes, horsepower, lamp loads or combinations thereof, in conjunction with applicable voltage levels.	
L Rating	Denotes the ability of a switch to handle the initial high inrush of a Tungsten Filament Lamp on AC voltage only.	
T Rating	Denotes the ability of a switch to handle the initial high inrush of a tungsten filament lamp on AC or DC voltage.	
Typical European Rating	16 (4) A 250V ~ T85 μ	resistive load amperage motor load amperage amperage voltage AC max. operating temp. in centigrade micro-gap (<3mm) approved
Microgap (μ)	European marking required for contact separation of less than 3mm. Switches with microgap (μ) approval are not acceptable as the safety disconnect of equipment from the main power source. The equipment requires an additional means for safe disconnection from the main power source such as a cord and plug.	
Bulb Life	Neon Incandescent LED	25,000 hours 25,000+ hours 100,000 hours
Lamp Characteristics	Neon (120-240V) Incandescent 6V 12-14V 18V 24-28V	.002A Current Draw .20A Current Draw .08A Current Draw .04A Current Draw .04A Current Draw

Agency Approvals

These marks are granted by national certification bodies for use on products which comply with their specifications.





Agency	Country	Mark
UL	USA	
UL	Canada	
UL	USA & Canada	
BEAB	United Kingdom	
CSA	Canada	
VDE	Germany	
TUV	Germany	
SEMKO	Sweden	
NEMKO	Norway	
KEMA	Netherlands	
DEMKO	Denmark	
UTE(USE)	France	
SEV	Switzerland	
OVE	Austria	
IMQ	Italy	
CCC	China	
FIMKO	Finland	






LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	RUNNING LIGHTS (UNDER POWER)	AA	NA	MA
	LIGHT	AB	NB	MB
	MASTER LIGHT SWITCH	AC	NC	MC
	HORN	AD	ND	MD
	PROPULSION SYSTEM TRIM TRIMMING OPERATION	AE	NE	ME
	VENTILATION FAN OR BLOWER	AF	NF	MF
	WINDSHIELD WASHER	AG	NG	MG
	WINDSHIELD WIPER	AH	NH	MH
	BILGE PUMP	AJ	NJ	MJ
	BILGE BLOWER	AK	NK	MK
	POTABLE WATER PRESSURE	AL	NL	ML
	ENGINE START	AM	ED	MM
	ENGINE STOP	AN	EE	MN
	DRIVE TILT TILT OPERATION	30		31
	EMERGENCY START	32		33
	UP/DOWN LIFT	34		
	TRIM TAB TRIMMING OPERATION	35		36

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	ANCHOR LIGHT	37		38
	ANCHOR	39		40
	WATER FLUSHING TAP FOR OUTBOARDS	41		42
	HIGH BEAM	43	44	45
	LOW / DIPPED BEAM	46	47	48
	SIDE MARKER LIGHT	DG	49	DF
	INTERIOR LIGHT	50	51	52
	WORK LIGHT	53	54	55
	WORK LAMP	56	57	58
	LOADING FLOOR LAMP	CW	59	CY
	ON -WIPER- INT DELAY	60		
	ROTARY BEACON	61	62	63
	LAMP TEST	DK	64	DL
	WINDSHIELD WIPER/WASHER	65	66	67
	HAZARD WARNING	68	69	70
	WARM AIR BLOWER	71	72	73
	HORN REAR	AX	74	Y4

Notes:

- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	REAR FOG LAMP	75	76	77
	DIFFERENTIAL LOCK	78	79	80
	ALL WHEEL DRIVE	81	82	83
	DIRECTION INDICATOR	84	85	86
ENG HATCH		87		88
HORN		89		90
BLOWER		91		92
DEPTH		93		94
BILGE PUMP		95		96
NAV LTS		97		98
COURT LTS		99		1A
PANEL LTS		1B		1C
ANCH LTS		1D		1E
TRIM TAB		1F		1G
WATER PUMP		1H		1J
WIPER		1K		1L
BILGE		1M		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
ENG COMP		1N		1P
ACC		1R	1S	1T
NAV ANC		1U		1V
WNDLS UP/DN		1W		1Y
NAV ANCH LTS		1Z		2A
WNDLS ON/OFF		2B		2C
DOCKING LTS		2D		2E
	MUSIC	2F		2G
	BATTERY	2H	FM	2J
	LEVER UP/DOWN	2K		
	ENG PREHEAT	2M	EA	2N
UP		2P		2R
ANTENNA		2S		
DOWN		2T		
PRESS		2U		
AUX START		2V		2W
	GAS	2Y	EB	2Z

Notes:













- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	RIDE CONTROL	3A	EN	3B
	KICK OUT	3C		3D
	BEACON	3E	EP	3F
	SLOW	3G		3H
	CHECK	3J	DJ	3K
	A/C	3L		3M
	REAR DEFOGGER	3N	3P	3R
	FORK LIFT	3S	ER	3T
	ENG PREHEAT	3U		3V
	REAR WINDOW WIPER	AY	3Y	Y5
REAR				EC
	EXCAVATOR BACKHOE BOOM SHIFT	4B		4C
	UNLOCK	4D		4E
	TRANSMISSION LOCK	4F		4G
	FORK LIFT DOWN / UP	4H		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	DRIVER SEAT LIGHTING	4J		4K
	SIDE MARKER LAMPS	4L	4M	4N
	FOG LAMP	4P	4R	4S
	TRUNK LIGHT	4T		4U
RED		4V		4W
AMBER		4Y		
	LINE INDICATOR	5B		5C
	HANDICAP	5D	BX	5E
	STOP REQUEST	5F		5G
	WINDSCREEN HEATING & VENTILATION	5H	FP	5J
	EXTERIOR MIRROR DEFROSTER	5K		5L
	MOMENTARY LEVER	5M		5N
	SLOW	5P		5R
HIGH		5T	Y6	5U
LOW		5V	Y7	5W
PARK		5Y		5Z

Notes:


















- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.


















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
WASHER		6C		
	SUPPLEMENTAL STEERING	6D		6E
BATT PARL		6F		6G
	DEPTH SOUNDER	6H		6J
	MUTE	6K		6L
T I M E R		6M		
M A N		6N		
LIVEWELL		6R		
	WATER TANK		6S	
	REAR WASHER/WIPER	6T	BY	6U
	FRONT DIFFERENTIAL LOCK	6V		6W
	LEVER UP/DOWN	6Y		
	BILGE PUMP#1	6Z		7A
	BILGE PUMP#2	7B		7C
	BILGE PUMP#3	7D		7E
	RIGHT STABILIZER	7F		7G
	LEFT STABILIZER	7H		7J

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
HEAD LIGHTS		7K		EJ
CL / ID LIGHTS		7L		
CRUISE CONTROL		7M		
SET/DECEL RES/ACCEL		7N		
ENGINE BRAKE		7P		
HIGH MED LOW		7R		
POWER WINDOW		7S		
ENGINE FAN		7T		
DRIVING LIGHTS		7U		
FOG LIGHTS		7V		
TRAILER CL / ID LIGHTS		7W		
ENGINE DIAGN		7Y		
LH/RH TANK		7Z		
MIRROR DEFOG		8A		
BACKUP LIGHTS		8B		
DASH LIGHTS		8C		
CAB SLEEPER		8D		

Notes:


















- ¹ Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.


















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	SLEEPER START	8E		
	HIGH LOW	8F		
	CRUISE CONTROL	8G	8H	8J
	CRUISE CONTROL ADJUST	8K	8L	8M
	ENGINE BRAKE	8N	8P	8R
	HIGH/MED/LOW	8S	8T	8U
	POWER WINDOW	8V	8W	8Y
	ENGINE FAN	8Z	9A	9B
	DIAGNOSTICS	9C	9D	9E
	LH/RH TANK	9F	9G	9H
	LENS BLACKOUT		9J	
	VARIABLE	9L	9M	9N
	MIRROR ADJUST	9P	9R	9S
	SPEAKER	9T		9U
	SLEEPER START	9V	9W	9Y
	HIGH / LOW	9Z	A1	A2
	BEACON	A3		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	MIRROR	A4		
	MASTER SWITCH	A5		A6
	RABBIT (FAST)	A7		A8
	RETARDER	A9		B1
	EXHAUST BRAKE	B2	BZ	B3
	TANDEM AXLE	B4		B5
	AIR TANK	B6		B7
	DRAIN	B8		
	AUTOMATIC TRANSMISSION	B9	EX	C1
	LOADER BUCKET DOWN	C2		C3
	LOADER BUCKET	C4		C5
	AUTO	C6		
	NEUTRAL LOCK	C7	EF	C8
	TRANSMISSION NEUTRALIZER	C9		D1
	RUNNING / ANCHOR LIGHTS	D2		
	TRIM TAB TRIMMING OPERATION	D3		D5
	TRACTOR FORWARD	D6		D7

Notes:


















- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.


















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	STEERING	D8	FN	D9
	BATTERY PARALLEL	E1		
	MIRROR DEFROST	DD	E2	DE
	SLEEPER LIGHTS		E3	
	IDLE SPEED	FB	E4	FAFN
	SLEEPER LIGHTS	E5		
	IDLE SPEED	E6		
	MOWER DECK UP/DN	E7		E8
	4 / 2 WD LOCK	E9		F1
	STEERING CONTROL	F2		F3
	DRIVE TILT UP	F4		F5
	MILL MAIN	F6		F7
	MILL REVERSAL	F8		F9
	HEAD LIGHTS	G1		G2
	WORK LIGHT	G3		G4
	RAISE	G5	EY	G6
	LOWER	G7	Ez	G8

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	FWD	G9		H1
	REV	H2		H3
	BROOM	H4		H5
	SANDER	H6		H7
	KNEEL	H8		
	CHIME MUTE	DY	H9	DZ
	R. DOOR	J1		J2
	F. DOOR	J3		J4
	AUX BATT	J5		J6
	SWING MAIN	J7		J8
	ACTIVE SWING	J9		K1
	CENTERING	K2		K3
	REAR OPERATION AUTO-LIFT RELEASE	K4		K5
		K6		K7
	ARROW		K8	
	FRONT WINDOW DEFROST	K9		L1
	REAR WINDOW DEFROST	L2		L3

Notes:


















- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.


















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	SIDE WINDOW DEFROST	L4		L5
		L6		L7
	CRAWLER STRETCHING	L8		L9
	CRAWLER LOOSENING	M1		M2
	SEARCH LIGHT	M3		M4
	SIDE MIRROR DEFROST	M5		M6
		M7	CA	M8
	UNLOADER AUGER	M9		N1
	REVERSING	N2		N3
	DRIVING LIGHT	N4		N5
	HAZARD	N6		N7
	EXTRA PLUG	N8		N9
	GRAIN TANK LIGHT	P1		P2
	ROTOR LIGHT	P3		P4
	CHAFF SPREADER	P5		P6
	HANDLE	P7	EM	P8
	LEFT / RIGHT TABLE	P9		R1

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	LEFT SIDE KNIFE	R2		R3
	ALL MECHANISMS	R4		R5
	MONITOR MENU	R6		R7
	VERTICAL BAR	S1		S2
	THRESHING SYSTEM	S3		S4
	TABLE MOVEMENT	S5		S6
	CYLINDER SPEED	S7		S8
	COVER PLATE	S9		T1
	ENGINE STARTING AID	T2		T3
	TRACTION CONTROL SYSTEM	T4		T5
	HYDRAULIC DIVERTER VALVE	T6		T7
	LAMP TEST	T8	T9	U1
	DOCKING LIGHT	U2		U3
	ROCKSHAFT	U4		U5
	AUX	U6	EG	U7
	DOCK LIGHTS	U8		
	CTSY LIGHTS	U9		

Notes:











- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	TRIM	V1		
	AIR TEMP SEA	V2		
	ENGINE LIGHTS	V3		
	TRANS LIGHTS	V4		
	DEFOG	V5		
	SEAT	V6		
	UP TRAILER	V7		EH
	DEPTH FINDER	V8		
	EXHAUST	V9		
	SINK PUMP	W1		W2
	STORAGE LIGHTS	W3		
	UP HATCH DOWN	W4		
	TRAILER 3rd AXLE LIFT	W5	W6	W7
	TRAILER 3rd AXLE LIFT	W8		
	HANDLE BAR HEATER	W9		Y1
	PARKING BRAKE	Y2	DH	Y3
	ARROW (UP)	Y8	ES	Y9

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	ARROW (DOWN)	Z1		Z2
	RIGHT SIDE KNIFE	Z3		Z4
	HYDRAULIC HAMMER	Z5		Z6
	HYDRA-CLAMP	Z7		Z8
	SHOVEL FLOAT	Z9		AP
	SHOVEL HORIZONTALLY	AR		AS
	HYDRAULIC HITCH	AT		AU
	LOCK	AV	BW	AW
	LIGHT	AZ		BA
	BLOWER FAST	BB		BC
	ARROW (LEFT)	BD	EU	BE
	ARROW (RIGHT)	BF	EV	BG
	HYDRAULIC FLUID	BH		BJ
	WORK LIGHTS	BK		BL
	TRACTOR WITH REAR PTO	BM		BN
	READING LIGHTS	BP		BR
	5 TH GEAR LOCKOUT	BS		BT

Notes:



















- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.













LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	FAILURE/ MALFUNCTION	BU		BV
COCKPIT LTS	COCKPIT LIGHTS	CB		CC
STOR LTS	STORAGE LIGHTS	CD		CE
SEAT		CF		CG
LIGHT		CH		CK
ANCHOR		CJ		CL
	POWER TAKE OFF	CR	EW	CS
STBD		CM		CN
FUEL		CP		CT
PORT		CU		CV
	SEAT BELT	CZ		DA
	ENGINE DIAGNOSTIC	DB		DC
	TRANS. OIL TEMP	DM	FG	DN
	TRANS. OIL PRESSURE	DP	FH	DR
	AIR FILTER	DS	FJ	DT
	WATER TEMP.	DU	FK	DV
	ENG.. OIL PRESSURE	DW	FL	DX
	* BAR LENS LASER ETCHED	EK		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	* BAR LENS LASER ETCHED	EL		
DIM		FC		FD
BRIGHT		FE		FF
	REAR INTERAXLE WHEEL DIFF LOCK	FS		
	FRONT WHEEL DIFF LOCK	FT		
	CRAWLING	FU		
	HI/LO GEAR XFER BOX	FV		
	REAR INTERAXLE DIFF LOCK	FW		
	XFER BOX NEUTRAL	FX		
	SUNROOF CLOSE	FY		
	SUNROOF OPEN	FZ		
	BOGGIE LIFT SELECTOR/UP	GA		
	BOGGIE LIFT SELECTOR/DN	GB		
	REAR BUZZER INHIBIT	GC		
	EXTRA HIGH BEAM LAMP	GD		
	MIRROR HEAT	GE		
	ASR OFF ROAD	GF		
	REAR WHEEL DIFF LOCK	GG		

Notes:
















- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.


















LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	ADR SWITCH	GH		
	EQUIP LIGHT	GJ		
	PANIC ALARM	GK		
	BEACON WARNING LIGHT	GL		
	MAIN DOOR UNLOCK	GM		
	BOGGIE RATIO CTRL	GN		
	WATER IN FUEL	GP		
	REDUCED SET BURGLAR ALARM	GR		
	PTO ADD GEAR BOX	GS		
	EBS TRAILER BRAKE	GT		
	MUDDY SITE	GU		
	PTO GEAR BOX	GV		
	MAIN DOOR LOCK	GW		
	HAZARD WARNING	GX		
	HILL START AID	GY		
	DRIVING LEVEL CTRL	GZ		
	DRIVING LEVEL CTRL/2	HA		
	REAR WORK PROJ LAMP	HB		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
OFF	OFF ENG CTRL RATING/PTO	HC		
	ON/OFF PARKING HEATER	HD		
	RED INTERIOR LIGHTING	HE		
	BYPASS/PARKING HEATER	HG		
	AIR SUSPENSION DN	HJ		
	AIR SUSPENSION UP	HK		
—	ENGINE RATING CTRL-	HL		
	AUTO/MANUAL	HM		
	MEM/RECALL	HN		
AUTO	DRIVING LEVEL CTRL/AUTO	HP		
	PERM XFER BOX DIFF LOCK	HR		
	FUNCTION LAMP	HT		
	ENGINE/XFER BOX PTO	HU		
	WINDOW LIFT	HV		
	ABS INHIBIT	HW		

Notes:

- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	* CONTURA IV & V BAR LENS LASER ETCHED	HX		
	* * CONTURA IV & V BAR LENS LASER ETCHED	HY		
	ENGINE RATING CTRL	HZ		
ON	ON ENG CTRL RATING/PTO	JA		
+	ENGINE RATING CTRL+	JB		
	HAZARD WARNING LAMP	JC		
	ADR SWITCH	JD		
	DRIVING LEVEL CONTROL	JE		
	DRIVING LEVEL CONTROL	JF		
-	FUNCTION INDICATOR	JG		
	AUTO/MANUAL	JH		
	MIRROR HEAT LEFT DRIVING	JJ		
	PTO GEAR BOX	JK		
	ASR OFF ROAD/ TRACTION CTRL	JL		
	REAR WHEEL DIFF LOCK	JM		
	HSA/BSRA SWITCH	JN		
	EQUIPMENT LIGHTING	JP		
	MACHINE ON	JR		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	PANIC ALARM	JS		
	BEACON WARNING LIGHT	JT		
	MV SUNROOF HATCH	JU		
	BOGGIE LIFT SELECTOR	JV		
	BOGGIE LIFT SELECTOR	JW		
	ACOUSTIC REVERSE LIGHT	JX		
	REAR WORK PROJECTOR LAMP	JY		
	PTO ON REAR ENGINE NMV	JZ		
	REAR INTER AXLE/ WHEEL DIFF LOCK	KA		
	WINDOW LIFT	KB		
	AIR SUSPENSION DOWN	KC		
	AIR SUSPENSION UP	KD		
	MAIN DOOR UNLOCK	KE		
	MAIN DOOR LOCK	KF		
MEM 	MEMORIZE/ RECALL SWITCH	KG		
2s recall 5s store	MEMORIZE/ RECALL SWITCH	KH		
ON 	ON/OFF ENGINE RATING CTRL	KJ		
	REDUCED SET BURGLAR ALARM	KK		

Notes:

- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	PARKING HEATER	KL		
	PTO ADD GEAR BOX	KM		
	MUDDY SITE SWITCH	KN		
	EBS TRAILER BRAKE	KP		
	+/- POUR PMT	KR		
	+/- POUR PMT	KS		
	ADR SWITCH	KT		
	ADR SWITCH	KV		
	WINCH UP	KW		
	WINCH DOWN	KX		
	CRUISE SPEED	KY		
	CRUISE RESUME	KZ		
	CRUISE SET	LA		
	MAIN SWITCH CONTROL	LB		
	ADDITIONAL WARNING	LC		
	REAR SEARCH SPOTLIGHT	LD		
	FRONT SEARCH SPOTLIGHT	LE		
	2 TONES SIREN	LF		

LEGEND		LEGEND CODE		
SYMBOL	NAME (SYMBOL MEANING)	BODY	LENS	
			NEGATIVE ¹	POSITIVE
	DAY/NIGHT MODE	LG		
	OFF ROAD MODE	LH		
	ROAD MODE	LJ		
	WINDOW LIFT	LK		
	AUTO NEUTRAL MV/DV	LL		
	SUNROOF CONTROL	LM		
	BEACONS WARNING LIGHTS	LN		
	REDUCE SET ALARM	LP		
	NIGHT HEATER	LR		
	WHITE DISC	LS		
	AUTO NEUTRAL RENAULT	LT		
	OFF ROAD	LU		
	FUNCTION LIGHT	LV		
ON OFF			11	
OFF ON			12	
I O O I			13	
O O I			14	
OFF ON			15	

Notes:

- Negative legends not available on L, LD, LW, and N-Series.
- Many symbols are SAE (J1362), ANSI and ISO approved symbols. Consult factory for custom symbols/icons.
- Use "body" legend codes for laser etched image identification.

There are several catalogs available featuring complete details on all Carling Technologies products. Below is a list of useful information such as catalogs, brochures and videos. Please visit our website at **carlingtech.com** or scan the QR codes below for complete details.

www.carlingtech.com



Watch Company Profile Video




Switches & Controls



catalog

Complete line and ordering details for Switches & Control products including Rocker, Toggle, Pushbutton, and Rotary style switches.

Hydraulic-Magnetic



catalog

Complete line and ordering details for all hydraulic-magnetic circuit breakers.

Thermal



catalog

Complete line and ordering details for all thermal circuit breakers.

GFCI / ELCI



catalog

Complete line and ordering details for all GFCIs/ELCIs.

Marine





catalog



brochure

Complete line of ELCIs, thermal and hydraulic-magnetic circuit breakers specific for marine applications.

Renewable Energy



catalog



brochure

Complete line of circuit breakers and disconnect products specific for renewable energy applications.

Telecom/Datacom




catalog



brochure

Complete line of hydraulic-magnetic circuit breakers specific for telecom/datacom applications.

On-Off Highway





catalog



brochure

Complete line of switches, controls and custom solutions specific for on-off highway applications.

Military



catalog



brochure

Complete line of COTS (*Commercial-Off-The-Shelf*) switches and circuit breakers specific for military applications.

Industrial Automation



brochure

Complete line of switches and circuit breakers specific for industrial automation & controls applications.

Authorized Sales Representatives

Click on the group name on the map below to find your local representative or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062-1177
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com www.carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com

