
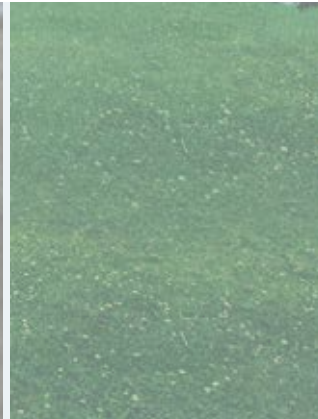
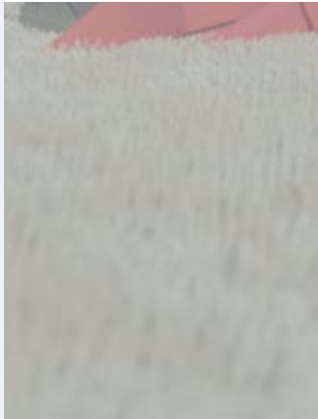


## **Solutions**

# **Agriculture**

# Agriculture

## Solutions for

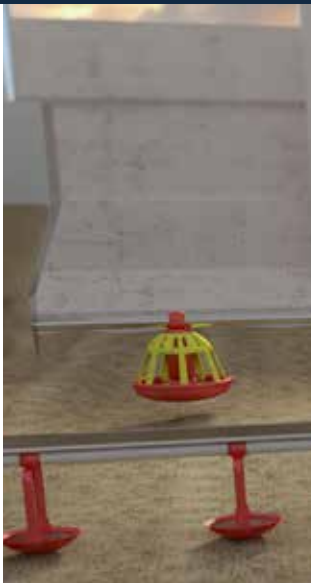

### Tractors and agricultural machinery

### Silos

### Feed distribution systems

### Irrigation

#### ABOUT CARLO GAVAZZI

Carlo Gavazzi Automation is an international group active in designing, manufacturing and marketing electronic equipment targeted at the global markets of industrial and building automation.

Our history is full of firsts and our products are installed in a huge number of applications all over the world. With more than 80 years of successful operation, our experience is unparalleled.

We have our headquarters in Europe and numerous offices around the world.

Our R&D competence centres and production sites are located in Denmark, Italy, Lithuania, Malta and the People's Republic of China.

We operate worldwide through 22 of our own sales companies and also selected representatives in more than 65 countries, from the United States in the West to the Pacific Rim in the East.

Our core competence in automation spans three product lines: Sensors, Switches and Controls.

Our wide array of products includes sensors, monitoring relays, timers, energy management system, solid state relays, safety devices and fieldbus systems.

We focus our expertise on offering state-of-the-art product solutions in selected market segments.

Our customers include original equipment manufacturers of packaging machines, plastic-injection moulding machines, food and beverage production machines, conveying and material handling equipment, door and entrance control systems, lifts and escalators, as well as heating, ventilation and air-conditioning devices.



## DESIGNED TO MEET MARKET REQUIREMENTS

Agricultural mechanization has brought major changes to agriculture and eased the burden on farm workers. Advances in tractor technology have made tractors more versatile and suitable for a wider range of farming tasks.

Machinery for ploughing and cultivation have contributed to boosting production. Special machinery is used to plant seeds and apply fertilizer through mulch at the correct depth. In irrigation, technologies such as micro sprinklers or drip irrigation, which save water and consume less power, are the environmentally friendly solutions for now and the future.

The global agricultural machinery industry provides more support to smallholders and other farmers with equipment designs and models that suit their needs and those of service providers.

Carlo Gavazzi offers, among other things, a wide range of sensors to measure speed and rotational direction of wheels in farm tractors, harvesting machines etc.

Carlo Gavazzi's capacitive sensors are widely used for level measurements of seed, fodder and liquids in silos and in animal feeding machinery. Ultrasonic sensors are used mainly for level measurements of liquids (e.g. milking machinery).

Reliable irrigation systems are highly important for agricultural production. The well proven Dupline® fieldbus with its up-to-the-minute technology, has become known as an extremely user-friendly and flexible fieldbus able to transmit signals over long distances - features that make Dupline® ideal as a fieldbus for irrigation systems.

Finally – thanks to Carlo Gavazzi's wide product range – most agricultural application challenges can be met by one supplier.

# Agriculture

## Tractors and agricultural machinery



### Inductive sensors

ICB12  
ICB18  
ICB30

### Inductive sensors with IO-Link

ICB12..IO  
ICB18..IO  
ICB30..IO

### Capacitive level sensors

CD34CNF

### Pick up sensors

PA2PK

### Ultrasonic sensors

UA18  
UA30

### Limit switches

PS


Agricultural machinery needs reliable and durable parts and components able to work long hours in difficult outdoor conditions, exposed to every kind of stress. Carlo Gavazzi offers a comprehensive range of components for most applications in agricultural and earth-moving vehicles, from passive magnetic pick up sensors (PA2PK) to inductive proximity sensors. The pick up sensors detect and measure the speed of phonic or toothed wheels and generally of any rotating device built in a ferromagnetic material and provided with slots and cogs, for example in engines and in tractors. Inductive sensors are used for non-contact measurements - for example to count revolutions of the axle in machinery or to

monitor the bucket position in a backhoe loader. The IO-Link ICB inductive sensors allow easy exchange of process data, remote configurations and events with simple and inexpensive 3-wire cabling, without needing to change the existing architecture. The ICB series, available from M12 to M30, can be completely configured to enable new functionalities such as the divider and speed control functions. Safety and positional mechanical switches in different versions and configurations are also available. Capacitive level sensors (CD34CNF series) mounted outside plastic tanks, can detect the level of water-based chemicals while ignoring foam, film or build-up.

Ultrasonic sensors (UA series) are also used to monitor sprayer heights in self-propelled row-crop sprayers. A particular application of ultrasonic sensors with analog output is control of the driving direction of the wagon or a motorized chassis equipped with one or more fixed or mobile platforms, for example for harvesting fruit.



# Silos

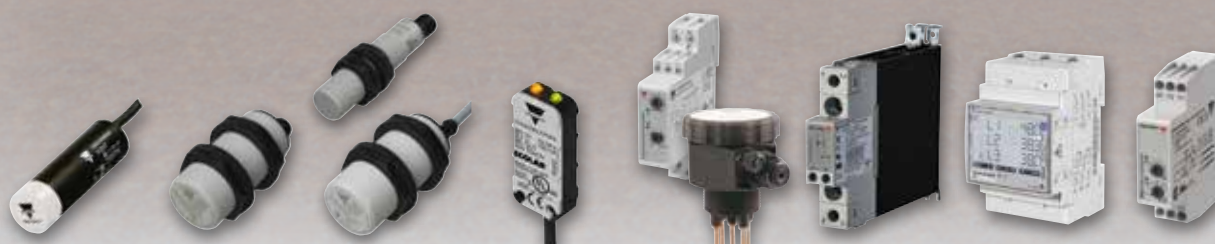

Capacitive sensors	Capacitive sensors	Capacitive sensors with IO-Link	Capacitive level sensors	Conductive level controllers / probes	1-phase solid state switches	Energy analysers	Timers
CB32 VC11/12	CA30CAN/CAF CA18CAN/CAF EC30	CA18..IO CA30..IO	CD34CNF	CLD CLP CLH	RGC1 RGS1	EM340 EM24	DAA51 DMB51

Carlo Gavazzi offers very efficient means for liquid and solid level measurement, both in large silos and in small storage containers.

Our 4<sup>th</sup> generation TRIPLESIELD™ capacitive sensors are designed to detect objects with a dielectric constant (DC) of as low as 1.5.



The CA18 and CA30 CAN/CAF sensors are excellent for accurate measurement of dry grain regardless of degree of humidity. The sensor provides a stable and precise signal of yield per unit area.

Knowing these areas makes it easy to adjust the amount of fertilizers and herbicides in exactly the right way. As a result, cost can be reduced and the environmental impact minimized. The capacitive sensors EC30 (AC version) have a long sensing distance that allows easy detection of the grain.

The VC11/12 sensors are available in multivoltage power supply with relay output and used in many agricultural

applications.

The conductive level program by Carlo Gavazzi comprises a complete range of intelligent conductive level controllers for liquids such as in slurry tanks (CL-series), the CLH electrode probes (3 or 5 electrodes).

Various adjustment possibilities enable the controller to perform filling operations, emptying operations or a combination of the two.

# Agriculture

## Feed distribution systems



Magnetic sensors	Capacitive sensors with IO-Link	Capacitive sensors	Photoelectric sensors	Inductive sensors	1 & 3-phase proportional controllers	Soft starters	Switching power supplies
S series	CA18..IO CA30..IO	VC11/12 CB32	PD30ET PA18/PH18	ICS12 ICS18 ICS30	RGC1P RGC2P RGC3P	RSGD RSBT	SPD SPPC SPM

Feeding distribution systems are critical to the quality and safety of farms with pig, poultry and dairy sectors. It is important to feed all the chickens at the same time and manual handling is eliminated.

The distribution is controlled by sensors (capacitive, inductive, photoelectric),



normally combined with solid state relays and soft starters.

The capacitive level sensors with IO-link are suitable for this application as they provide easy diagnostic and settings, increasing up-time of the feeding systems. Thanks to their advanced settings it is possible to detect the type of feed, preventing faults that might occur when the feed supplier changes.

The VC11/12 sensors are able to directly drive a contactor or a small motor.


The PD30 Stainless steel sensors work perfectly even in the harshest environments. The high-quality stainless steel housing guarantees maximum mechanical resistance, and prescribed

cleaning schedules are smoothly met without costly machine downtime. Ultrasonic sensors or capacitive sensors control the levels in the silos and monitor emptying to ensure the efficiency of the process. Carlo Gavazzi soft starters (RSGD) soft start and soft stop pumps, screw feeders, ventilators as well as chillers (RSBT).

Temperature control in animal farms is optimised with the RGC1P proportional controller which, through an analog input, regulates the power of heating lamps.

The RGC3P (in special version) is used for optimal speed control of ventilators in egg incubators.

# Irrigation

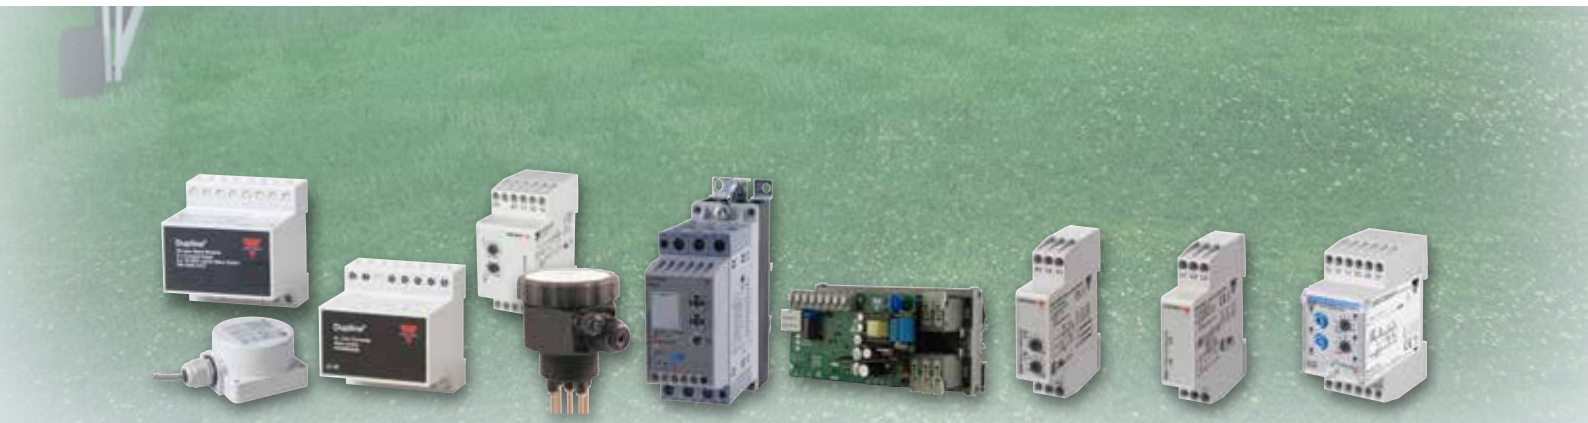

Dupline® digital I/O modules	Dupline® converters	Conductive level controllers / probes	3-phase pump and ventilators soft starters	1-phase dynamic starter for submersible pumps	Timers	Monitoring relays	Earth leakage relays
GH3440 4412 GH6440 4412	GH3485 0000	CLD CLP CLH	RSWT	HDMS	DAA51 DMB51	DPA51 DPB52	DEA71 DEB71

Traditional irrigation systems are characterized by complex and expensive wiring. The Carlo Gavazzi Dupline® irrigation bus reduces installation costs and increases flexibility in agricultural irrigation systems, where the valves are usually distributed over a large area. Any type of irrigation controller, whether it is a PLC, PC or dedicated controller, can use Dupline® as a remote I/O system. The wiring topology is completely free, with no limitation to the number and length of branches. The Dupline® Fieldbus is the ideal system to control levels, monitor pumps and activate valves over a large area and from a distance. The RSWT soft starter series is a 3-phase soft starter designed to limit the starting current and water hammering in centrifugal

pumps. Minimal settings and compact design facilitate the replacement of star-delta and mechanical contactors. The RSWT's self learning algorithm ensures that the pump starts with optimal settings even under different load conditions. The HDMS is a single phase dynamic motor soft starter for borehole pumps. The innovative HDMS algorithm (patent pending) is designed to reduce the start current by 70% with respect to a direct on line start resulting in less disturbances to generators or weak voltage grids. With HDMS the start capacitor is no longer required as it generates sufficient starting torque through a unique algorithm using IGBTs. The DEA71 and DEB71 protect electric installations against the risk of fire or

electrocution due to current leaks. They are ideal for protection on pumps, submersible pumps and motors. They detect insulation and/or grounding failure via the external core balance current transformer (CTG), provide a warning signal at 60% and trip the MCB when the fault current exceeds the set fault current.



# Agriculture

## Our product range

### Capacitive sensors



#### CA18CAN/CAF CA30CAN/CAF

- Dimensions: M18 / M30
- Plastic housings, DC versions
- Adjustable sensing distance up to 20 mm flush and 30 mm non-flush
- Protection: short circuit, transient and reverse polarity
- Degree of protection: IP67, IP68 and IP69K
- Approvals/Marks: CE - cULus - Ecolab

#### MAIN FEATURES

- 4<sup>th</sup> generation TRIPLESIELD™ technology
- Dust and humidity compensation
- Dust and temperature alarm outputs
- Increased temperature stability
- Sensing face can withstand temperatures up to 120°C

### Capacitive sensors with IO-Link



#### CA18..IO / CA30..IO

- Dimensions: M18/M30 (Plastic)
- 4<sup>th</sup> generation TRIPLESIELD™ Technology
- IO-Link communication with timer, diagnostics and logic functions
- Sensing distance up to 30 mm
- Approvals/Marks: CE, cULus approved
- IO-Link V1.1

#### MAIN FEATURES

- High EMC immunity
- ESD ratings up to 40 KV
- Sensing face temperature up to 120°C
- Best immunity towards Inverters

### Capacitive sensors



#### CA30CLN

- Level sensor for solid, fluid or granulated substances
- Dimensions: M30
- Adjustable sensing distance: 4-12 mm
- Thermoplastic polyester housing
- Multi voltage supply 20.4 to 255 VAC/DC
- Approvals/Marks: CE - cULus

#### MAIN FEATURES

- Available with/without built-in time delay
- Dust and humidity compensation
- Rear side with integrated trimmer shaft
- Laser printing of main specifications on the sensor surface

### Capacitive sensors



#### VC11/12

- Capacitive level sensors for solid, fluid or granulated substances
- Dimensions: Ø32
- Adjustable sensing distance: 4-12 mm
- Multivoltage supply: 20.4 to 255 VAC/DC
- Approvals/Marks: CE - cULus

#### MAIN FEATURES

- New back-part with integrated trimmer shafts
- SPDT relay output
- Time delay on operate or release

### Capacitive sensors ATEX version



#### CB32

- TRIPLESIELD™ sensor protection
- Adjustable sensing distance: 4-20 mm
- Dimensions: Ø32
- Capacitive level sensors for solid, fluid or granulated substances
- Protection transients and reverse polarity
- Approvals/Marks: CE

#### MAIN FEATURES

- Approved acc. to ATEX directive for operation in potentially explosive dust
- Relay output
- With or without adjustable time delay

### Capacitive sensors



#### CA18CL

- TRIPLESIELD™ sensor protection
- Sensing distance: 0.5-12 mm (M18)
- Plastic housing, AC versions
- Automatic detection of NPN or PNP load
- Selectable "make or break" switching by means of Teach function
- Approvals/Marks: CE - UL - CSA

#### MAIN FEATURES

- Teach-in of sensing distance via push-button or COM-input
- Humidity compensation
- Protection: short circuit, transients and reverse polarity

### Capacitive sensors



#### EC30

- TRIPLESIELD™ sensor protection
- Sensing distance up to 25 mm
- Dimensions: M30
- Plastic housing, AC versions
- Approvals/Marks: CE - UL - CSA

#### MAIN FEATURES

- Detection of e.g., corn or feed
- Sensing face can withstand temperatures up to 120°C
- Protection: short circuit, transients and reverse polarity

### Capacitive level sensor



#### CD34CNF

- Dimensions 8 x 16 x 34 mm
- Power supply: 10-30 VDC
- Output: NPN / PNP / NO or NC
- Power supply from 208 to 480 VAC (± 15%)
- Connectivity: Cable or M8 4-pin Pig-tail
- Approvals/Marks: CE - cULus - ECOLAB

#### MAIN FEATURES

- Detects water-based liquids (up to 50 mS)
- Automatic adaptation to tank wall thickness
- Eliminates influence from build-up or foam
- IP65, 66, 67, 68, 69K NEMA type 1, 2, 4, 4X, 5, 12
- Protection: reverse polarity, short circuit and transients



# Our product range

## Pick up sensors



### PA2PK

- Dimensions: diameter M20 x 1.5 length 60, 70, 107 mm
- Pulse output function
- Cylindrical nylon with 30% glass fiber
- Protection degree IP65
- Approvals/Marks: CE

#### MAIN FEATURES

- AMP connector Superseal
- Suitable for applications where the measurement of gear speed is required.
- Operating frequency > 100 Hz

## Ultrasonic sensors



### UA18 / UA30

- Dimensions: M18, M30
- Ultrasonic sensors with integrated amplifier providing a digital and/or analog output and integrated amplifier
- Up to 6 m sensing distance
- Switching output with two setpoints
- Housing material: plastic or AISI316L stainless steel
- Approvals/Marks: CE - cULus - CSA

#### MAIN FEATURES

- Excellent EMC performance and precision
- Detects clear, transparent and shiny targets, solid objects, liquid or granules.
- Protection: short circuit, transients and reverse polarity

## Conductive level controllers / probes



### CLD / CLP / CLH

- 17.5 mm slim housing, 22.5 mm & 35 mm housing available
- Multiple filling and emptying functions
- 24-240 VAC/DC [CLD2EB1BU24]/24 VDC, 115 VAC, 230 VAC
- Flexible modular probes up to 5 electrodes [CLH5]
- Extendible probes for longer length

#### MAIN FEATURES

- Wide operational supply voltage range
- Slim compact housing
- Wide sensitivity adjustment 250 Ω to 500 KΩ
- Cascading amplifiers for more levels [CLP2FA]

## Photoelectric sensors



### PD30ET

- World standard housing style 11 x 31.5 x 21 mm
- Supply voltage: DC 4-wire
- Output: NPN/PNP NO+NC
- Sensor types: D, B, R, P and T
- Connectivity: Cable or M8 connectors
- Approvals/Marks: CE - cULus (UL508, CSA C22.2) - ECOLAB

#### MAIN FEATURES

- Stainless Steel housing AISI 316L
- Resistant to high-pressure washdown, aggressive cleaning agents.
- IP67, IP68, IP69K, NEMA type 1, 2, 4, 4x, 5, 6, 6P
- Protection: reverse polarity, short circuit and transients

## Photoelectric sensors



### PA18

- Standard M18 cylindrical housing
- Power supply: 10 to 30 VDC
- Separate models available for NPN or PNP outputs
- Sensing types: Diffuse reflective, BGS, Pol. Retro-reflective, Through beam
- Sensitivity adjustment by potentiometer
- Approvals/Marks: CE - cULus

#### MAIN FEATURES

- IP69K / ECOLAB approved / CE marking / cULus approved acc. to UL508
- Diagnostic LED indication (green and yellow LED)
- Short circuit, reverse polarity and overload protection

## Photoelectric sensors



### PH18

- Square sensor with M18 front
- Power supply: 10 to 30 VDC
- Separate models available for NPN or PNP outputs
- Sensing types: Diffuse reflective, BGS, Pol. Retro-reflective, Through beam
- Sensitivity adjusted by potentiometer
- Approvals/Marks: CE - cULus

#### MAIN FEATURES

- IP69K / ECOLAB approved / CE marking / cULus approved acc. to UL508
- Diagnostic LED indication (green and yellow LED)
- Short circuit, reverse polarity and overload protection

## Inductive sensors



### ICB12 / ICB18 / ICB30

- M12, M18 and M30 Nickel-brass housing in short or long barrel lengths
- Standard, double and triple distance sensing ranges
- 3-wire and 4-wire versions
- Two metres oil resistant PVC cable or M12 plug version
- Approvals/Marks: CE - cULus - cCSAus

#### MAIN FEATURES

- High precision and reliability thanks to the microprocessor technology
- Short circuit and overload LED indication
- Laser engraved information on the front cap, permanently legible

## Inductive sensors with IO-Link



### ICB12..IO / ICB18..IO / ICB30..IO

- Nickel-plated brass M12, M18 or M30 cylindrical threaded barrel housings
- Sensing distance from 4 mm to 22 mm
- Output functions: programmable NO or NC, NPN, PNP or push-pull
- 2 meter oil resistant PVC cable or M12 plug version
- Approvals/Marks: CE, cULus
- IO-Link V1.1

#### MAIN FEATURES

- Operating temperature: -25°C to +70°C (-13° to +158°F), and -40°C to +70°C (-40° to +158°F) for M12-plug version
- Adjustable sensing distance and hysteresis and configurable output
- Up to 2 kHz operating frequency

# Agriculture

## Our product range

### Inductive sensors



#### ICS12 / ICS18 / ICS30

- M12, M18 and M30 stainless steel housing
- Sensing distance from 2 mm up to 22 mm
- Degree of protection: IP67, IP68 and IP69K
- Approvals/Marks: CE - cULus - cCSAus - ECOLAB

#### MAIN FEATURES

- Certified compatibility with most of the detergents and disinfectants available on the market
- Short circuit and overload LED indication
- Extended temperature range: -40°C to +80°C (-40°C to +85°C for ICS30)

### Magnetic sensors



#### S series

- Type: rectangular plastic housing
- Dimensions: 79 x 21.2 x 11.5 mm
- Side operated
- Operating temperature -25°C to 75°C
- Protection degree IP67

#### MAIN FEATURES

- Several operating distances thanks to the wide range of magnetic units [CL series]
- Easy and fast mounting

### 1-phase solid state switches



#### RGS1 / RGC1

- Product width: 17.5 mm up to 70 mm, DIN-rail or panel mount
- Ratings: up to 660 VAC, 90 AAC, 18000 A<sup>2</sup>s
- Integrated output overvoltage protection
- Control input ranges: 4-32 VDC, 20-275 VAC (24-190 VDC)
- Approvals/Marks: CE - EAC - cULus [RGC] - UR [RGS] - CSA [RGS] - VDE - GL (RGC up to 30 AAC)

#### MAIN FEATURES

- Integrated heatsink [RGC] or without heatsink [RGS]
- 100 kA short circuit current rating
- Optional over temperature protection [RGC]

### 1 and 3-phase proportional controllers



#### RGC1P / RGC2P / RGC3P

- Product width: 35 mm up to 70 mm, DIN or panel mount
- 1-phase with heatsink [RGC1P] or for panel mount [RGS1P], 3-phase with heatsink [RGC2P, RGC3P]
- Ratings: up to 660 VAC, 90 A (1-phase), 75 A/pole (2-phase), 65 A/pole (3-phase)
- Control input: 0-20 mA, 4-20 mA, 12-20 mA, 0-10 VDC, 0-5 VDC, 1-5 VDC
- Approvals/Marks: CE - EAC - cULus - UR [RGS1P] - CSA [RGS1P] - CCC [RGC2P, RGC3P]

#### MAIN FEATURES

- Selectable switching modes
- Integrated overvoltage protection
- Monitoring for SSR and load circuit malfunctions [RGC2P, RGC3P]

### 3-phase scroll compressor soft starters



#### RSBD / RSBT

- Enhanced current reduction capability with patented auto-adaptive algorithm
- Motor rating: 3-phase up to 45 kW @ 400 V
- Integrated diagnostic functions
- 2- and 3-phase controlled solutions
- Approvals/Marks: cUL listed

#### MAIN FEATURES

- Plug and play: no user settings required
- Typically > 50% scroll compressor inrush current reduction
- Internally bypassed and internally supplied

### 3-phase general purpose soft starters



#### RSGD

- Operational voltage range: 187-440 VAC, 187-660 VAC
- Operational current range: 12 AAC up to 100 AAC
- Control voltage: 24 VAC/DC, 110-400 VAC
- Serial communication (Modbus 2-wire) [RSGD 75 mm models]
- Approvals/Marks: cULus - CCC - EAC

#### MAIN FEATURES

- Easy to use and set-up
- Self-learning algorithm to adapt to different loads
- Auxiliary relays for top of ramp and alarms

### 1-phase dynamic starter for submersible pumps



#### HDMS

- Operational current: Up to 37 AAC
- Operational voltage: 110 - 230 VAC 50/60 Hz
- Current reduction vs DOL: Up to 75%
- Compliant with residential (Class B) limits for emissions
- Approvals/Marks: cULus approved

#### MAIN FEATURES

- No need for a start capacitor
- Self-learning algorithm - plug and play
- Plug and play: no user settings required
- Modbus RTU over RS485 serial communication
- NFC technology for data download of 32 starts

### 1-phase solid state soft starter for pumps and ventilators



#### RGTS

- Operational current: Up to 25 AAC
- Operational voltage: 110 - 230 VAC 50/60 Hz
- Current reduction vs DOL: Up to 45%
- Fully solid state solution
- Approvals/Marks: cULus approved

#### MAIN FEATURES

- Easy to configure (only 2 settings required)
- Multi-voltage operation
- Panel/DIN rail mount
- QR code for troubleshooting

# Our product range

3-phase pumps and ventilators soft starters	Variable frequency drives	Monitoring relays	Monitoring relays
---	---------------------------	-------------------	-------------------



## RSWT

- Motor rating: up to 45 kW (90 A)
- 3-phase controlled & internally bypassed
- Operational voltage: RSWT40: 220-400 VAC, RSWT60: 220-600 VAC
- PTC input, Alarm - Top of ramp - Run relay indication
- Approvals/Marks: cULus - CCC - EAC

### MAIN FEATURES

- Easy to use and setup
- Self-learning algorithm to improve pump starts/stops
- Integrated overload protection (Class 10)



## RVLF

- Compact dimensions, with ratings up to 11 kW
- Inbuilt V/F and SLV control
- Drive voltage ratings: 100-120 VAC; 200-240 VAC; 380-480 VAC
- Drive kW rating: - 0.4 kW - 11 kW (0.5 HP - 15 HP)
- Approvals/Marks: CE - cULus

### MAIN FEATURES

- Ease of use with minimal settings
- Precision low speed control with SLV algorithms
- Inbuilt filters on most models to reduce harmonics disturbance



## DPA51

- Dimensions: 81 x 17.5 x 67.2 mm DIN-rail housing
- Phase sequence and loss relay
- 3-phase AC (own power supply); regenerated voltage
- Power supply from 208 to 480 VAC
- Approvals/Marks: CE - UL - CSA - CCC

### MAIN FEATURES

- Protection from reverse running and phase loss
- 17.5 mm width: the smallest on the market
- Plug and play: no settings needed



## DIA53

- Dimensions: 81 x 17.5 x 67.2 mm DIN-rail housing with 12 mm hole for current measurement
- Current monitoring relay with built-in current transformer
- 20, 50 or 100 A full scale
- Self powered
- Approvals/Marks: UL - CSA - CCC

### MAIN FEATURES

- 2-wire connection
- Knob adjustable setpoint
- Integrated solid state NPN PNP output

Monitoring relays	Monitoring relays	Earth leakage relays	Earth leakage relays
-------------------	-------------------	----------------------	----------------------



## DPB52

- Dimensions 81 x 17.5 x 67.2 mm DIN-rail housing
- Phase sequence and phase loss, regenerated V detection
- 3 phase AC (own power supply)
- Power supply from 125 to 624 VAC (rated 208 to 480 VAC)
- Approvals/Marks: UL - CSA - CCC

### MAIN FEATURES

- Overvoltage/undervoltage setting with alarm ON delay
- 1 DIN module width. Suitable for NORM panels
- Switch mode power supply



## DIB02 / PIB02

- Dimensions: 22.5 mm for DIN-rail [DIB] or 35.5 mm for plug in [PIB]
- Overcurrent or undercurrent detection
- DC current measurement by means of external shunt
- Power supply 115/230 VAC, 24/48 VAC, 24 VDC, 48 VDC
- Adjustable time delay

### MAIN FEATURES

- Motor protection from overload
- DC or AC current measurement
- 3-phase overcurrent measurement with MP3 CT



## DEA71

- 35 mm Mini-DIN Housing
- 2 SPDT 5 A Relay Outputs
- Disconnected CT detection
- Power supply from 24 V to 240 VAC
- Approvals/Marks: UL and CE (IEC EN 60947-2 Annex M Compliant)

### MAIN FEATURES

- Fixed Trip Current 30 mA or 300 mA
- Remote test / reset push button input
- Warning indication and output



## DEB71

- 35 mm Mini-DIN Housing
- 2 SPDT 5 A Relay Outputs
- LED leakage level indicator
- Power supply from 24 V to 240 VAC
- Approvals/Marks: UL and CE (IEC EN 60947-2 Annex M Compliant)

### MAIN FEATURES

- Adjustable Trip Current Setting from 30 mA to 30 A
- Remote test / reset push button input
- Warning indication and output

# Agriculture

## Our product range

### Core balance current transformers



#### CTG

- 6 sizes from 35 mm to 210 mm
- Closed Round Core type
- Screw terminals connection
- 1:1000 ratio
- Approvals/Marks: UL and CE (IEC EN 60947-2 Annex M Compliant)

#### MAIN FEATURES

- 1:1000 current reduction ratio
- Current transformer
- Single and three phase

### Current transformers



#### E83-2050

- DIN-rail or surface mounting 22.5 mm Euronorm housing with 12 mm hole for current measurement
- AC current transformer with 4-20 mA DC secondary
- 1-phase AC current measurement
- Power supply from 10 to 40 VDC
- Approvals/Marks: UL

#### MAIN FEATURES

- 7 knob-selectable ranges from 5 to 50 AAC
- Easy interface to PLC or monitoring relays

### Current transformers



#### CTD / TADK

- CTD: currents from 40 to 4000 A
- TADK2: 1-250 A
- Removable panel fixing clips
- DIN-rail and panel mounting facility
- Double screw terminals [CTD]
- Sealable covers
- Case: ABS, self-extinguishing level UL 94 V-0
- Accuracy class: 0.5

#### MAIN FEATURES

- Wound primary / solid core or split-core
- Compliance with IEC 60185, VDE 0414-1 regulations
- Removable DIN-rail mounting holder

### Timers



#### DAA51 / DMB51

- Dimensions: 81 x 17.5 x 67.2 mm DIN-rail housing
- Delay on operate function [DAA], multifunction [DMB]
- Combined AC and DC power supply
- Repeatability: < 0.2%
- Approvals/Marks: UL - CSA - RINA

#### MAIN FEATURES

- Delay on operate/release; interval with manual/automatic start
- Double interval; symmetrical recycler (ON or OFF first)
- Timing range from 0.1 s to 100 h

### Timers



#### FMB01 / FAA

- Dimensions: 48 x 48 mm housing for 11 pin socket or panel mounting
- Multifunction timer with 7 functions
- DPDT output
- Universal power supply
- Approvals/Marks: cUR - CSA

#### MAIN FEATURES

- Front knob-adjustable time setting
- Selectable time ranges from 0.05 s to 300 h
- Delay on operate/release, ON/OFF first symmetrical recycle, single/double interval on trigger open/close

### 3-phase power transducers



#### CPT

- Dimensions: 83.5 x 45 x 98.5 mm DIN-rail housing
- Accuracy 0.5 % (voltage, current)
- Measurement by CT and VT
- Front protection degree IP20
- Analogue, digital, pulse or serial outputs available

#### MAIN FEATURES

- Compact size power transducer
- Provides electrical variables set to a PLC to manage compressors and other loads
- Suitable for on-board panel installation

### 3-phase energy analysers for direct current up to 65A



#### EM340

- 3 DIN modules
- Backlit touch LCD
- Measurement of voltage, current, power, power factor and frequency
- Bi-directional energy metering, 3x 8-digit, cl. B (EN50470)
- Measuring inputs: 230 to 400 V<sub>LL</sub> AC, 65 A
- Approvals/Marks: CE - MID (PFA and PFB)

#### MAIN FEATURES

- Self-powered
- Dual tariff management
- Pulse output or RS485 Modbus or M-Bus port
- Sealable terminal covers

### 3-phase energy analysers



#### EM24

- 3-phase energy analyser with direct connection
- Direct connection up to 65 A or by CT
- Dimensions: 4-DIN-rail module housings
- Class B (EN50470)
- Pulse open collector output
- Modbus RTU or Ethernet or M-bus communication port

#### MAIN FEATURES

- Direct measurement in a very compact housing to save space
- Suitable for measuring generated and consumed energy
- On request, MID annex D certification available
- M-bus port integrated in the meter without external gateways

# Our product range

Dupline® digital I/O modules	Dupline® valve controls	Dupline® converters	Dupline® test units
---------------------------------	----------------------------	------------------------	------------------------



## GH3440 4412

- Module for controlling 3-wire latching valves
- 2 outputs to open and close valve
- 2 inputs for e.g., pulse counting, tamper switch or status feedback
- Supplied by bus - no external power needed

### MAIN FEATURES

- Built-in microcontroller for correct coil-pulsing and charge monitoring
- Valve closes in case of bus fault



## GH6440 4412

- Module for controlling 3-wire latching valves
- 2 outputs for open and close valve
- 2 inputs for e.g. pulse counting, tamper switch or status feedback
- Built-in charge capacitor, gas arrestor and microcontroller

### MAIN FEATURES

- Can be buried in the ground at the actual valve position
- Supplied by bus — no external power needed



## GH3485 0000

- Generates 28 V Hi-Line signal
- Supplies and controls up to 64 valve I/O modules over two wires
- LED-indications for Dupline® carrier, Hi-Line carrier and supply

### MAIN FEATURES

- Built-in Gas-arrestor for lightning protection
- Up to 7 km transmission distance



## GHTU8

- Portable test unit
- 12 key tactile keyboard
- Dual group reading
- Analog BCD reading

### MAIN FEATURES

- Monitoring of Hi-line channel status with LCD display
- Designed as part of the Dupline® irrigation concept

Switching power supplies	Switching power supplies	Switching power supplies	Switching power supplies
-----------------------------	-----------------------------	-----------------------------	-----------------------------



## SPD

- Output power 5 W to 480 W
- Universal input range of 110-240 VAC, or up to 370 VDC
- Short circuit, overload and overvoltage protection
- PFC > 100 W
- UL1310 Class 2 (up to 90 W)
- Approvals/Marks: cULus - TUV - CCC - ISA C1D2

### MAIN FEATURES

- DC OK signal
- Parallel connection
- Screw, spring or detachable terminal connectors



## SPDM

- Output power 30 W to 240 W
- Universal input range of 110-240 VAC, or up to 370 VDC
- Short circuit, overload, overvoltage and over temperature protection
- UL1310 Class 2 (up to 75 W)

### MAIN FEATURES

- Saves up to 20% panel space
- High efficiency and wide operating temperature range
- Screw or spring terminal connectors
- Class I DIV2



## SPM

- Output power from 7.5 W to 100 W
- Universal input range of 110-240 VAC, or up to 370 VDC
- Short circuit and overload protection
- Derating starts from +60°C
- Approvals/Marks: cULus - TUV - CCC - ISA C1D2

### MAIN FEATURES

- UL1310 Class 2 (up to <91W)
- Adjustable output +/- 10%
- Low voltage LED indicationw



## SPPD

- Output power from 15 W to 800 W
- Universal input range of 110-240 VAC
- Short circuit, overload and over voltage protection
- PFC function available >75 W
- Approvals/Marks: CE - UL

### MAIN FEATURES

- Adjustable output +/- 10%
- Compact dimensions
- Wide operating temperature range up to 70°C

# Agriculture

## Our product range

### DC UPS



#### SPUC / SPUBC

- Power supply, UPS and battery charger “All in one” [SPUBC], UPS controller [SPUC]
- 12 or 24 VDC 5 A output (up to 30 A SPUC)
- Power boost up to 2 times rated output, permanent [SPUBC]
- Built-in battery status, complete diagnosis [SPUBC]
- Approvals/Marks: CE - UL

#### MAIN FEATURES

- Power supply independent from charger [SPUBC], to be used in addition to 12 or 24 V power supply [SPUC]
- Remote indication for battery operation and battery low “Start from battery” and “Empty battery charging” features [SPUBC]

### Industrial relay



#### RSLM

- SPST or SPDT option
- Contact rating for 6 A, 250 VAC / 30 VDC
- Coil voltage of 12 VDC to 60 VDC
- Built-in battery diagnosis
- Approvals/Marks: VDE - CQC - cURus - CSA

#### MAIN FEATURES

- Ultra slim, 5 mm width
- DIN-rail mount [ZRLS socket] or PCB mount [ZRLP]
- Surge voltage of up to 6 kV

### Limit switches



#### PS

- Material: plastic, metal
- Horizontal / vertical control available
- Minimum actuation force / torque
- Approvals/Marks: CE - UL - CSA

#### MAIN FEATURES

- Mechanical life > 15,000,000 cycles
- Precise operating point

## OUR SALES NETWORK IN EUROPE

### AUSTRIA

Carlo Gavazzi GmbH  
Ketzergasse 374,  
A-1230 Wien  
Tel: +43 1 888 4112  
Fax: +43 1 889 10 53  
office@carlogavazzi.at

### BELGIUM

Carlo Gavazzi NV/SA  
Mechelsesteenweg 311,  
B-1800 Vilvoorde  
Tel: +32 2 257 4120  
Fax: +32 2 257 41 25  
sales@carlogavazzi.be

### DENMARK

Carlo Gavazzi Handel A/S  
Over Hadstenvej 40,  
DK-8370 Hadsten  
Tel: +45 89 60 6100  
Fax: +45 86 98 15 30  
handel@gavazzi.dk

### FINLAND

Carlo Gavazzi OY AB  
Ahventie, 4 B  
FI-02170 Espoo  
Tel: +358 9 756 2000  
myynti@gavazzi.fi

### FRANCE

Carlo Gavazzi Sarl  
Zac de Paris Nord II, 69, rue de la Belle Etoile,  
F-95956 Roissy CDG Cedex  
Tel: +33 1 49 38 98 60  
Fax: +33 1 48 63 27 43  
french.team@carlogavazzi.fr

### GERMANY

Carlo Gavazzi GmbH  
Pfnorstr. 10-14  
D-64293 Darmstadt  
Tel: +49 6151 81000  
Fax: +49 6151 81 00 40  
info@gavazzi.de

### GREAT BRITAIN

Carlo Gavazzi UK Ltd  
4.4 Frimley Business Park,  
Frimley, Camberley, Surrey GU16 7SG  
Tel: +44 1 276 854 110  
Fax: +44 1 276 682 140  
sales@carlogavazzi.co.uk

### ITALY

Carlo Gavazzi SpA  
Via Milano 13,  
I-20020 Lainate  
Tel: +39 02 931 761  
Fax: +39 02 931 763 01  
info@gavazziacbu.it

### NETHERLANDS

Carlo Gavazzi BV  
Wijkermeerweg 23,  
NL-1948 NT Beverwijk  
Tel: +31 251 22 9345  
Fax: +31 251 22 60 55  
info@carlogavazzi.nl

### NORWAY

Carlo Gavazzi AS  
Melkeveien 13,  
N-3919 Porsgrunn  
Tel: +47 35 93 0800  
Fax: +47 35 93 08 01  
post@gavazzi.no

### PORTUGAL

Carlo Gavazzi Lda  
Rua dos Jerónimos 38-B,  
P-1400-212 Lisboa  
Tel: +351 21 361 7060  
Fax: +351 21 362 13 73  
carlogavazzi@carlogavazzi.pt

### SPAIN

Carlo Gavazzi SA  
Avda. Iparraguirre, 80-82,  
E-48940 Leioa (Bizkaia)  
Tel: +34 94 480 4037  
Fax: +34 94 431 6081  
gavazzi@gavazzi.es

### SWEDEN

Carlo Gavazzi AB  
V:a Kyrkogatan 1,  
S-652 24 Karlstad  
Tel: +46 54 85 1125  
Fax: +46 54 85 11 77  
info@carlogavazzi.se

### SWITZERLAND

Carlo Gavazzi AG  
Verkauf Schweiz/Vente Suisse  
Sumpfstrasse 3,  
CH-6312 Steinhausen  
Tel: +41 41 747 4535  
Fax: +41 41 740 45 40  
info@carlogavazzi.ch

## OUR SALES NETWORK IN THE AMERICAS

### USA

Carlo Gavazzi Inc.  
750 Hastings Lane,  
Buffalo Grove, IL 60089, USA  
Tel: +1 847 465 6100  
Fax: +1 847 465 7373  
sales@carlogavazzi.com

### CANADA

Carlo Gavazzi Inc.  
2660 Meadowvale Boulevard,  
Mississauga, ON L5N 6M6, Canada  
Tel: +1 905 542 0979  
Fax: +1 905 542 22 48  
gavazzi@carlogavazzi.com

### MEXICO

Carlo Gavazzi Mexico S.A. de C.V.  
Circuito Puericultores 22, Ciudad Satelite  
Naucalpan de Juarez, Edo Mex. CP 53100  
Mexico  
T +52 55 5373 7042  
F +52 55 5373 7042  
mexicosales@carlogavazzi.com

### BRAZIL

Carlo Gavazzi Automação Ltda.Av.  
Francisco Matarazzo, 1752  
Conj 2108 - Barra Funda - São Paulo/SP  
Tel: +55 11 3052 0832  
Fax: +55 11 3057 1753  
info@carlogavazzi.com.br

## OUR SALES NETWORK IN ASIA AND PACIFIC

### SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.  
61 Tai Seng Avenue #05-06  
Print Media Hub @ Paya Lebar iPark  
Singapore 534167  
Tel: +65 67 466 990  
Fax: +65 67 461 980  
info@carlogavazzi.com.sg

### MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.  
D12-06-G, Block D12,  
Pusat Perdagangan Dana 1,  
Jalan PJU 1A/46, 47301 Petaling Jaya,  
Selangor, Malaysia.  
Tel: +60 3 7842 7299  
Fax: +60 3 7842 7399  
sales@gavazzi-asia.com

### CHINA

Carlo Gavazzi Automation  
(China) Co. Ltd.  
Unit 2308, 23/F.,  
News Building, Block 1, 1002  
Middle Shennan Zhong Road,  
Shenzhen, China  
Tel: +86 755 83699500  
Fax: +86 755 83699300  
sales@carlogavazzi.cn

### HONG KONG

Carlo Gavazzi Automation  
Hong Kong Ltd.  
Unit 3 12/F Crown Industrial Bldg.,  
106 How Ming St., Kwun Tong,  
Kowloon, Hong Kong  
Tel: +852 23041228  
Fax: +852 23443689

## OUR COMPETENCE CENTRES AND PRODUCTION SITES

### DENMARK

Carlo Gavazzi Industri A/S  
Hadsten

### MALTA

Carlo Gavazzi Ltd  
Zejtun

### ITALY

Carlo Gavazzi Controls SpA  
Belluno

### LITHUANIA

Uab Carlo Gavazzi Industri Kaunas  
Kaunas

### CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.  
Kunshan

## HEADQUARTERS

Carlo Gavazzi Automation SpA  
Via Milano, 13  
I-20020 - Lainate (MI) - ITALY  
Tel: +39 02 931 761  
info@gavazziautomation.com



**CARLO GAVAZZI**  
Automation Components

*Energy to Components!*

[www.gavazziautomation.com](http://www.gavazziautomation.com)

