

Switching Power Supply Type SPD 10W DIN rail mounting

CARLO GAVAZZI



- Universal AC input full range
- Installation on DIN rail 7.5 or 15mm
- Short circuit protection
- Overload protection
- High efficiency
- LED indicator for DC power ON
- LED indication for DC low
- Power Ok output
- Internal input filter
- CE, TUV approved and cULus Listed

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 24 10 1 B

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input Type _____
 Optional features _____

Approvals



Input type: 1= single phase

Output Performances

| MODEL NO. | INPUT VOLTAGE | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | EFF. (avg.) |
|-----------------------------|---------------|----------------|----------------|----------------|-------------|-------------|-------------|
| Single Output Models | | | | | | | |
| SPD05 | 90~264 VAC | 10 WATTS | + 5 VDC | 2000 mA | 71% | 83% | 69% |
| SPD12 | 90~264 VAC | 10 WATTS | + 12 VDC | 840 mA | 73% | 86% | 72% |
| SPD24 | 90~264 VAC | 10 WATTS | + 15 VDC | 670 mA | 74% | 87% | 72% |
| SPD48 | 90~264 VAC | 10 WATTS | + 24 VDC | 420 mA | 74% | 87% | 72% |

Output Data

| | |
|-----------------------------------------------|-----------|
| Line regulation | ± 1% |
| Load regulation | ±2% |
| Minimum load | 0A |
| Turn on time (full resistive load) | 1000ms |
| Vi nom, Io nom with 3500µF | 1500ms |
| Transient recovery time | 2ms |
| Ripple and noise | 50mVpp |
| Output voltage accuracy | ±1% |
| Temperature coefficient | ±0.03%/°C |
| Hold up time | |
| Vi= 115VAC | 25ms |
| Vi=230VAC | 100ms |
| Voltage fall time (I _{o,nom} Vi nom) | 150ms max |

| | |
|------------------------------------------|--------------------------------|
| Rated continuous loading | |
| 5V Model | 2A @ 5VDC/1.7A @ 5.75VDC |
| 12V Model | 0.84A@12VDC/0.72A@13.8VDC |
| 15V Model | 0.67A @ 15VDC/0.58A @ 17.25VDC |
| 24V Model | 0.42A @ 24VDC/0.34A @ 28.8VDC |
| Reverse voltage | |
| 5V Model | VDC 7.5 |
| 12V Model | VDC 18 |
| 15V Model | VDC 22 |
| 24V Model | VDC 35 |
| Capacitor load | 3500µF |
| Voltage rise time at full resistive load | 500ms |
| VI nom, Io nom with 3500µF | 150ms |

Input Data

| | | | | | |
|----------------------------|--------------|-------|--------------------------|---------|--|
| Rated input voltage | 100 - 240VAC | | Power dissipation | | |
| Voltage range | | | 5V Model | 4.0W | |
| AC | 90 - 265VAC | | 12V Model | 3.4W | |
| DC | 120 - 375VDC | | 15V Model | 3.3W | |
| Rated input current | | | 24V Model | 2.8W | |
| (Vi:115VAC, Io nom) | Typ. | 200mA | Frequency range | 47-63Hz | |
| | Max. | 300mA | Leakage current | | |
| Voltage range | | | Input-Output | 0.25mA | |
| Vi=115VAC | 10A | | Input-FG | 3.5mA | |
| Vi=230VAC | 18A | | | | |

Controls and Protection

| | | | |
|-----------------------------|------------------------------------|------------------------------------------|------------|
| Overload | 110%~145% | Over voltage protection | 125 - 145% |
| Input fuse | T25A/250VAC internal ¹⁾ | Internal surge voltage protection | Varistor |
| Output short circuit | Hiccup mode | | |

1) Fuse not replaceable by user


General Data (@ nominal line, full load, 25°C)

| | | | | |
|-------------------------------------|----------------------|----------------------|----------------------------------|-------------------------------|
| Ambient temperature | -20°C to +71°C | MTB | | |
| Derating (>61°C to +71°C) | 2.5%/C | 5V Model | 801000 Hours | |
| Ambient humidity | 20 - 95% RH | 12V Model | 803000 Hours | |
| Storage | -25°C to +85°C | 15V Model | 805000 Hours | |
| Protection degree | IP20 | 24V Model | 808000 Hours | |
| Cooling | Free air convection | Case material | Plastic: PC, UL94-V0 | |
| Insulation voltage | | | | |
| Input-Output | 3.000VAC/4242VDC min | | Pollution degree | 2 |
| Input-FG | 1.500VAC/2121VDC min | | Altitude | 2000 m |
| Insulation resistance I/O | 100MΩ min (@ 500VDC) | | Dimensions LxWxD mm(inch) | 90(3.60)x22.5(0.89)x114(4.49) |
| | | | Weight | 120 g |


Norms and Standard

| | | | |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Vibration resistance | meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis) | CE | EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3 |
| Shock resistance | meet IEC 60068-2-27 (15G,11ms, 3 Axis, 6 faces, 3 times for each face) | | |
| UL/cUL | UL508 listed, UL60950-1, UL1310 Class 2 Power (only 5V, 12V w/o Class 2) Reco gnized, ISA 12.12.01 (Class 1, Division 2, Groups A, B, C and D) | | |
| TUV | EN 60950-1, CB scheme | | |
| CCC | Available upon request | | |


Block Diagram

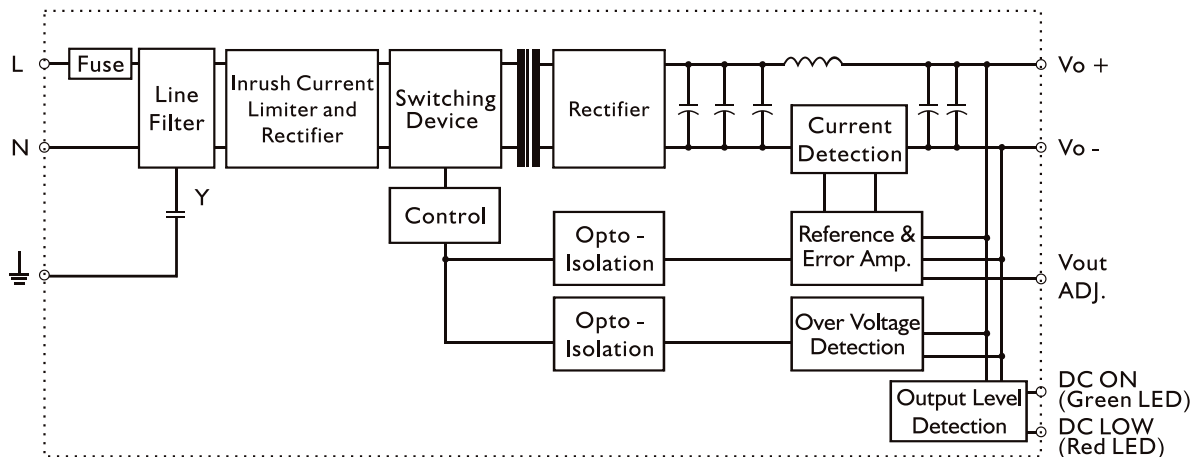


Pin Assignment and Front Controls

| Pin No. | Designation | Description |
|---------|-------------------------------------------------------------------------------------|--------------------------------------------------------------|
| 1 | V+ | Positive output terminal |
| 2 | V- | Negative output terminal |
| 3 |  | Ground this terminal to minimize high-frequency emission |
| 4 | N | Input terminals (neutral conductor, no polarity at DC input) |
| 5 | L | Input terminals (phase conductor, no polarity at DC input) |
| | ON | Operation indicator LED |
| | LO | DC LOW indicator LED |
| | Vout ADJ. | Trimmer-potentiometer for Vout adjustment |


Derating Diagram

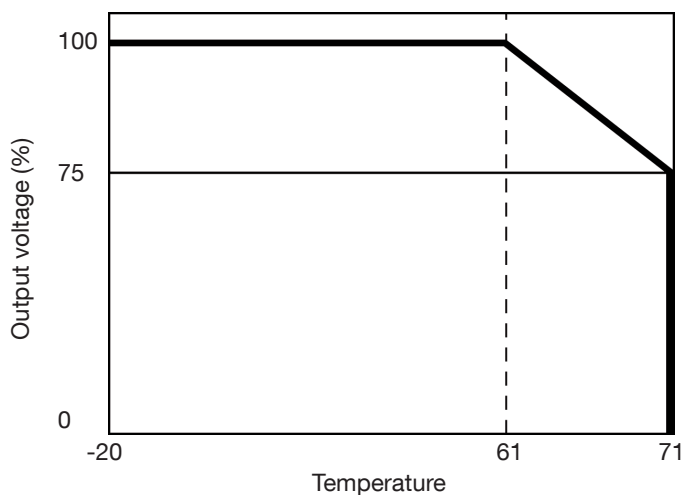


Typ. Current Limited Curve

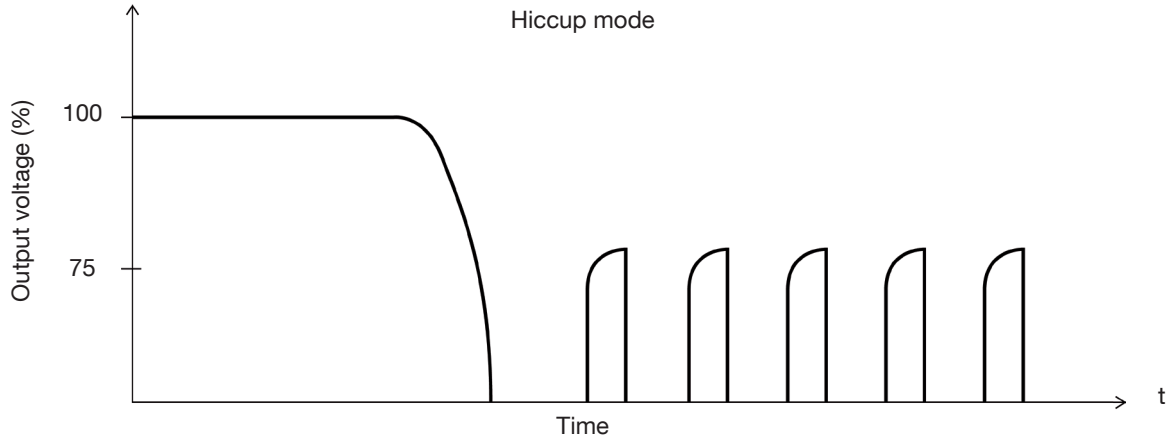

Mechanical Drawings mm (inches)

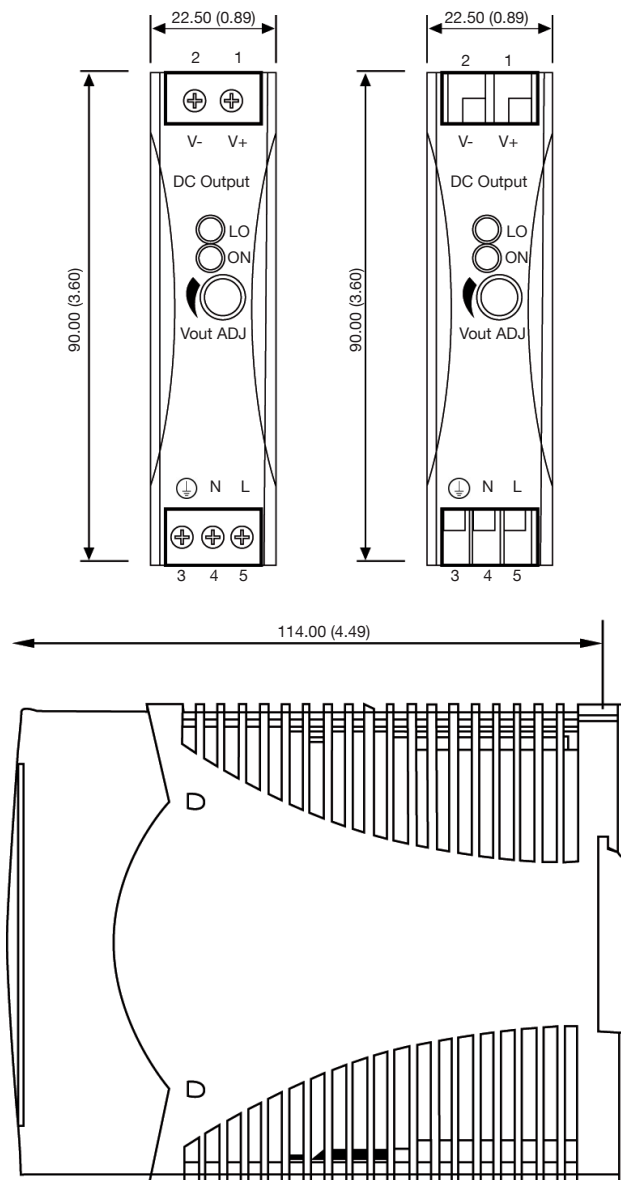

Typ. Efficiency Curve

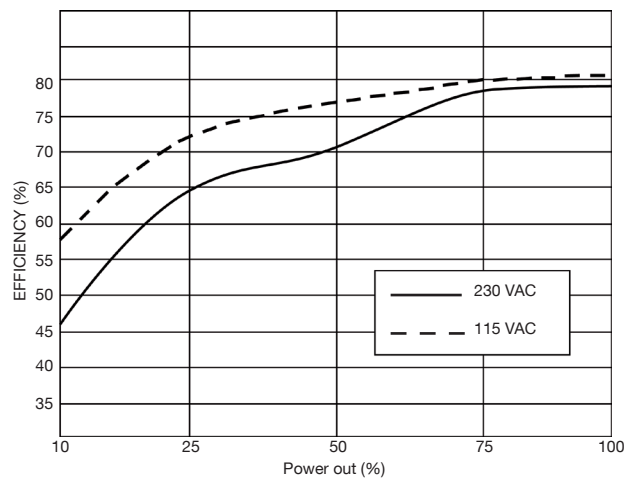

Installation

Ventilation and cooling

Normal convection
 All sides 25mm free space
 for cooling is recommended

Connector size range

Spring terminal

AWG24-14 (0.2~2mm²)
 flexible/solid cable, 10mm
 stripping at cable and
 recommends use copper
 conductors only, 60/75°C

Screw terminal

AWG26-12 (0.2~2.5mm²)
 flexible/solid cable, con nector
 can withstand torque at max
 0,56Nm (5 lbs-in). 4~5 mm
 stripping at cable and recom
 mends use copper conductors
 monly, 60/75°C

Max. torque for terminal

Input terminal

0.56Nm (5.0lb-in)

Output terminal

0.56Nm (5.0lb-in)

General tolerance mm(in.)

0.00 (0.00) ÷ 30.00 (1.18)

±0.30 (0.01)

30.00 (1.18) ÷ 120.00 (4.72)

±0.50 (0.02)