


RoHS

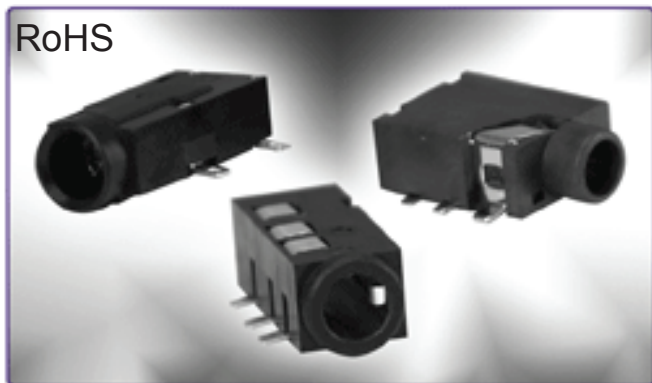

STX-35332 Series Surface Mount 3.5mm Audio Jack

Features

- Offered in a 2-Pole, 3-Pole, or 4-Pole Version
- Used in devices such as audio equipment, cell phones, or digital still camera
- Complies with EIA Standards

Performance Specifications Materials and Finish

Housing

High Temp, 94V-0

Terminals

Copper Alloy, Gold Plated

Electrical Characteristics

Contact Resistance

Before Durability Test

50 Milliohms Max.

After Durability Test

100 Milliohms Max.

Rated Voltage: 16V DC

Rated Current: 0.3A

Insulation Resistance : 100 Megohms Min. at 500V DC

Dielectric Strength : 500V AC RMS for 1 Minute

Operating Temperature : -25°C to + 70°C

AUDIO JACKS

STX-35332 Series

Documentation & Ordering Information

Kycon Part

Part Number Builder

Series	Number of Pins	Threading Option	PC99 Color Option	Packaging
--------	----------------	------------------	-------------------	-----------

Series

STX-35332

Number of Pins

3 Pin

4 Pin

5 Pin

Threading Option

N - Non-Threaded

NM - Non-Threaded, Mono (Available only with 3Pin)

PC99 Color option (Available only with 5 Pin)

123C - Yellow

577C - Lime

701C - Pink

Packaging

TR - Tape and Reel

STX-35332 Dimensions

Dimensions in mm

STX-35332-3N-TR

