
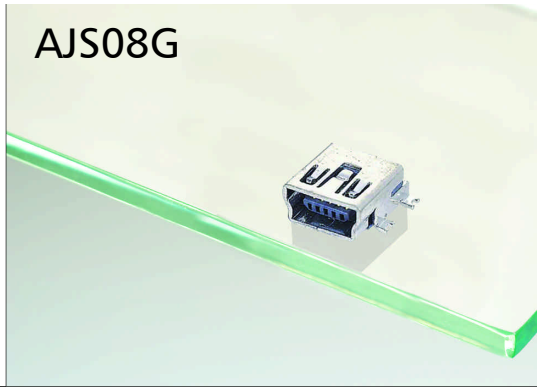


- Style G
- USB
- Shielded

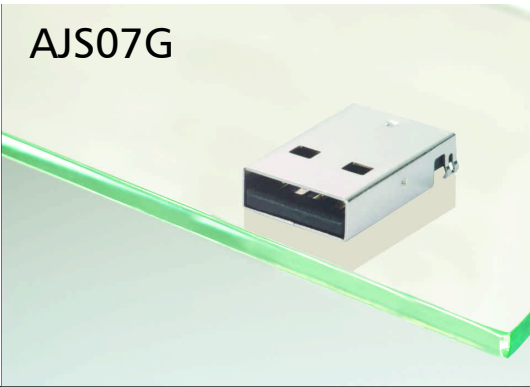

For electrical specifications see page 37

**Description AJS07G**

USB A plug  
SMT horizontal edge mount

**Technical Data AJS07G**

Housing: Nylon PA9T G.F.  
Contact: Brass EH (t=0.25mm)  
Gold/tin plated  
Ni:1~1.5u; Tin:3u, Gold:30u  
Metal Shell: Brass (t=0.4mm)  
Nickel plated  
Ni:2~3u  
Plating: 30u" gold


**Description AJS08G**

Mini USB Type B receptacle  
SMT horizontal mount

**Technical Data AJS08G**


Housing: Nylon PA9T G.F.  
Contact: Phosphor bronze (t=0.25mm)  
Gold/tin plated  
Ni:1~1.5u; Tin:3u, Gold:30u  
Metal Shell: Brass (t=0.4mm)  
Nickel plated  
Ni:2~3u  
Plating: 30u" gold

**Dimensions in mm**

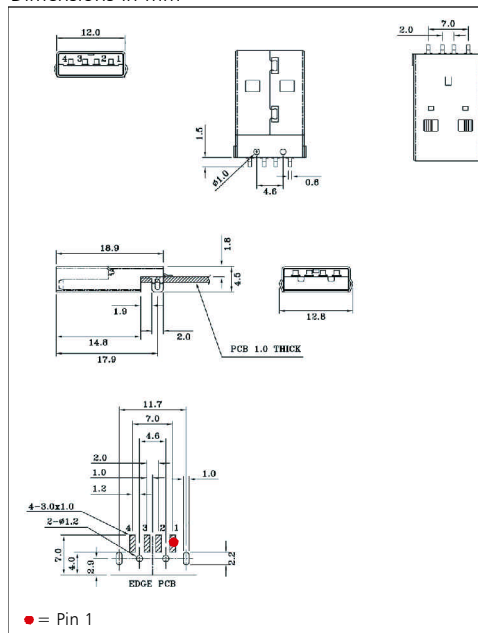

PC Board Layout - Component Side

**Dimensions in mm**

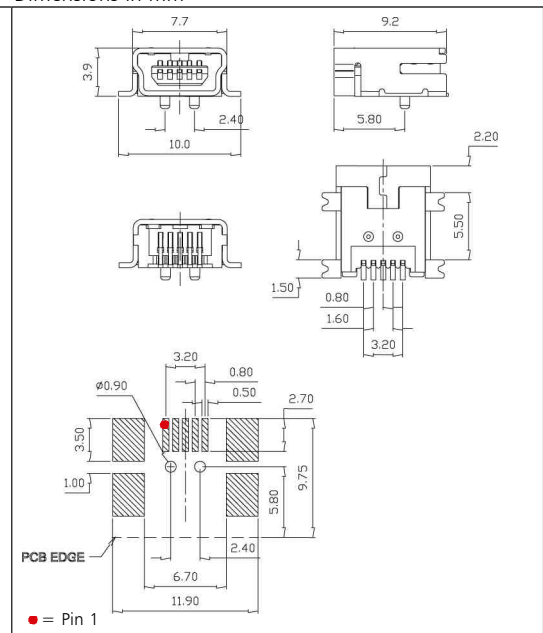

PC Board Layout - Top View

**Ordering Information**

AJS07G	4	4	1	3	0	0	X
Type	Positions	Contacts	Ports	Plating	Insert		
				1 = 6u"	1 = Black		
				3 = 30u"	2 = White		

**Ordering Information**

AJS08G	5	5	1	3	0	X	X
Type	Positions	Contacts	Ports	Plating	Insert		
				1 = 6u"	1 = Black		
				3 = 30u"	2 = White		

Peg:  
0 = w/ pegs  
1 = w/o pegs

Subject to technical changes and printing errors.