Model 720



# Description

The Redington Model 720 Electronic Hour Meter offers a large 7 digit LCD display, (999999.9) 0.32" (8mm) high, with an input operating voltage of 85-500VAC. The front of the unit is totally sealed, and the Hour Meter is housed in a rugged steel enclosure that is interchangeable with the Redington Model 720 Electro Mechanical Hour Meters. The wide operating voltage makes this product ideal for almost any application.

Features	Options
<ul> <li>Operating voltage 85-500VAC</li> <li>Rugged steel housing</li> <li>Lithium battery</li> <li>Quartz accuracy (better than 0.01%)</li> <li>Popular 3-Hole Mounting</li> </ul>	<ul> <li>Gasket (721-0004)</li> <li>Special termination available</li> <li>DC</li> </ul>


### Specifications

Termination: Mounting: Temp. Range:	Large 7 digit LCD (999999.9), 0.32" (8mm) high Non-reset 85-500VAC 50/60Hz : Self-powered (internal lithium battery) Wire leads 6" (152mm) Panel (3-Hole)	Humidity: Vibration: Shock: Dielectric: Accuracy: Weight:	0 to 95% RH, Non-condensing, front totally sealed 10 to 80 Hz, 0.06 Double Amplitude 50G 1000VAC 50/60Hz for 1 Minute Quart Accuracy (better than 0.01%) 5.0 oz (142g)	
Operating: Storage:	-4°F to + 140°F(-20°C to +60°C) -40°F to +165°F (-40°C to +75°C)			

## Models Description

720-5300 85-500VAC, non-reset, 3-hole round, 6" (152mm) wire leads

### Dimensions

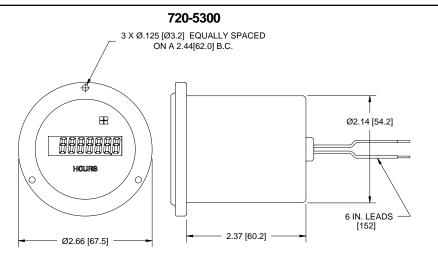

Panel cutout: 2.16" [54.9] Dia. Mounting holes: 0.125" [3.2] Dia. on 2.44" [62.0] B.C.

### Applications

