


DIGITAST SE Key Switch

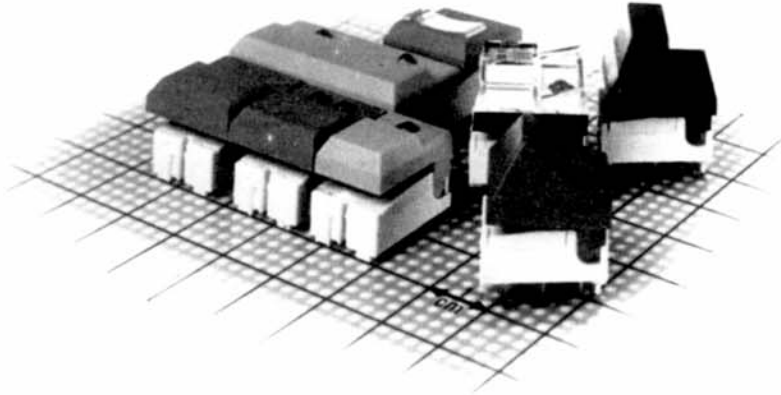

A high performance momentary (OA) or push-push (EE) key switch especially for digital input.

- Long operating life.
- Double or triple wide buttons available.
- LED – one or two – optional.
- DIGITAST F with a flat button design

General description

The DIGITAST SE is a most versatile electronic switch for printed circuit boards, especially when used with dual in-line packages.

Vibration free, short smooth travel through pivoted button tops.

Available as momentary button switch (OA) as well as push-push action with over-travel release (EE).

Micro SPDT system with tactile feeling.

Two integral molded "standoff" pins for alignment on PC boards.

Overall height 14.3 mm [.563 inch], sealed terminals, 1 or 2 LEDs optional to indicate functions.

Ordering code		1	2	3	4	5	6	7
	Example:	SE	AU	EE	01	03	R	G
1	Designation: SE	→	→	→	→	→	→	→
2	Contact material: AU = gold	→	→	→	→	→	→	→
3	Mechanical function: OA = momentary EE = push-push**)	→	→	→	→	→	→	→
4	Key cap color: 01 = black, 02 = white, 03 = red, 05 = grey, 06 = yellow, 07 = blue, 08 = green, 12 = orange	→	→	→	→	→	→	→
5	Key cap style: 01 to 27	→	→	→	→	→	→	→
6	LED color, position 1*): R = red, G = green, Y = yellow	→	→	→	→	→	→	→
7	LED color, position 2*): R = red, G = green, Y = yellow	→	→	→	→	→	→	→

*) With 2 LEDs: LED color of position 1 is always meant for the left LED looking on the button with LEDs on top.

***) Push-push available with button styles 01, 02, 03, 04, 05, 06, 07, 08, 13, 22, 23, 24, 25