


Momentary / Maintained / Signal Lamps


Round concealed bezel style

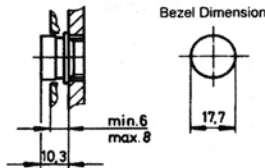

	Contact Block 1NO+1 NC	Bezel Black
Momentary Switch	Base	504002
	1	504102
	2	504202
	3	504302
4	504402	
Maintained Switch	Base	514002
	1	514102
	2	514202
	3	514302
4	514402	

Indicator Lamp 554037


Round flat lens exposed bezel style



	Contact Block 1NO+1 NC	Bezel Black
Momentary Switch	Base	504008
	1	504108
	2	504208
	3	504308
4	504408	
Maintained Switch	Base	514008
	1	514108
	2	514208
	3	514308
4	514408	

Indicator Lamp 554008

Round concave lens exposed bezel style



	Contact Block 1NO+1 NC	Bezel Black
Momentary Switch	Base	504008
	1	504108
	2	504208
	3	504308
4	504408	
Maintained Switch	Base	514008
	1	514108
	2	514208
	3	514308
4	514408	

Indicator Lamp 554008

Lens flat Ø18

	Opaque	Transparent
white	464015	465015
yellow	464115	465115
green	464215	465215
blue	464315	465315
red	464415	465415
black	464515	
orange	464615	465615

Lens flat Ø15mm

	Opaque	Transparent
white	464021	465021
yellow	464121	465121
green	464221	465221
blue	464321	465321
red	464421	465421
black	464521	
orange	464621	465621

Lens concave Ø15mm

	Opaque	Transparent
white	464022	465022
yellow	464122	465122
green	464222	465222
blue	464322	465322
red	464422	465422
black	464522	
orange	464622	465622

Please remember to order the proper tools for use with T&H switches:
Lens Remover
Mounting Wrench
Lamp Remover

COMMON INFORMATION

For a brighter light, all transparent lens can be specified with a clear lower lens diffuser. Use 010 suffix (i.e. 461012 010).

The concealed bezel style is especially suitable for mimic diagrams and for mounting with lens immediately next to each other.


All maintained switches incorporate a bifunctional mechanism for changing the function from maintained to momentary and back again.

WIRING DIAGRAM



250V AC/5A (cos w 0.7)
 Lamp holder T 1 3/4 MG

PANEL CUT-OUTS

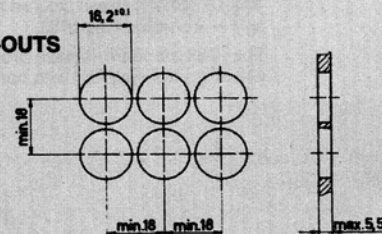

Dimensional Data for behind panel

Length = L	mm	Inches
Pole 1	27.5	1.083
Pole 2	36	1.417
Pole 3	44.5	1.752
Pole 4	53	2.087
Indicator lamp	23.5	.925

