
Rev	AWO #	Description	Date	Appr
-		RELEASED	10/28/16	

APPROVED: _____

DATE: _____ TITLE: _____

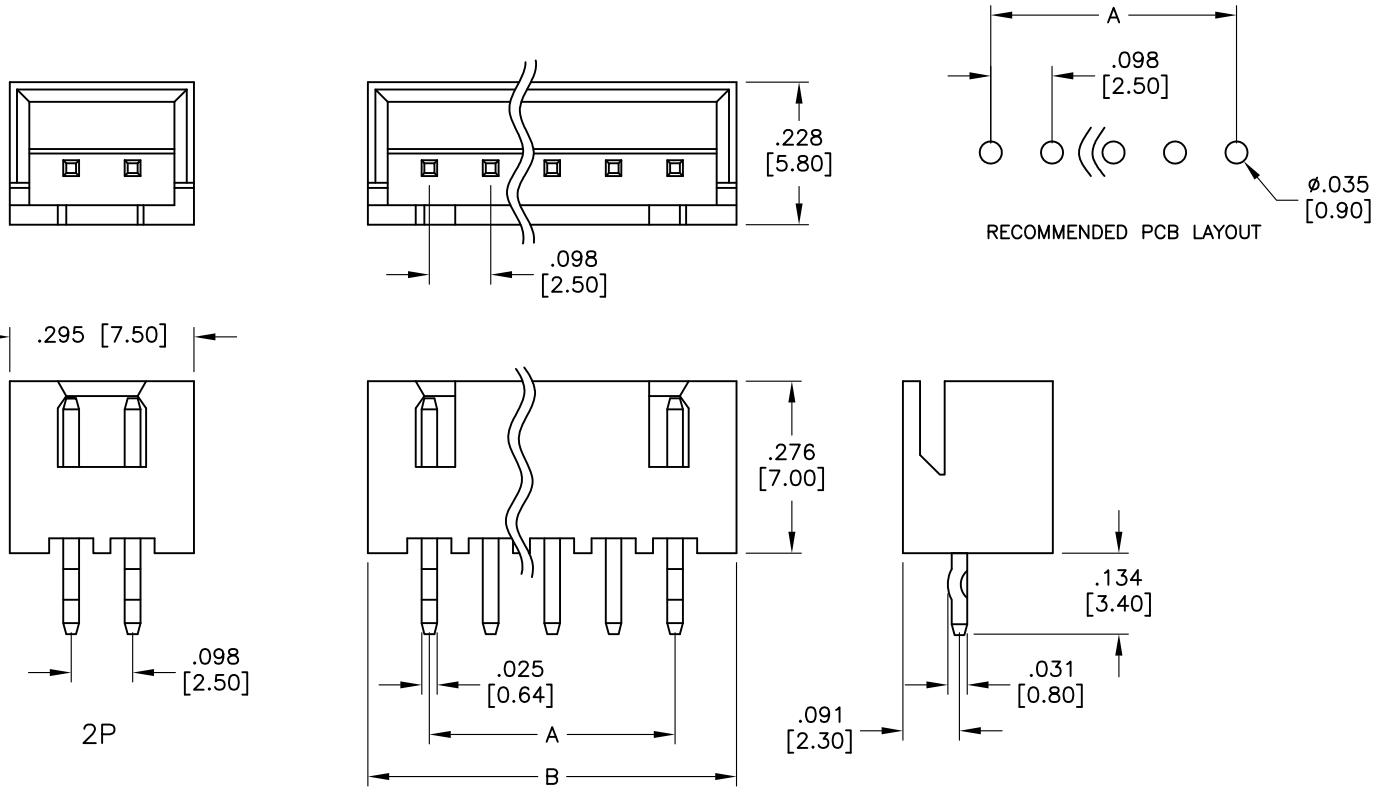

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL94V-2
Insulator color: White
Contact: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 3A AC/DC
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Withstand voltage: 1000 VAC rms.
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	10/28/16
CHECKED	YC	10/28/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD PITCH: 2.50MM
WAFER STRAIGHT TYPE

SIZE	PART NO.	REV.
X	25SH-B-XX-TS-V2	-

REF: S00015T | SCALE: NTS | SHEET 1 OF 1