

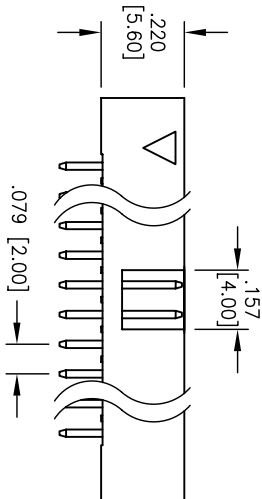
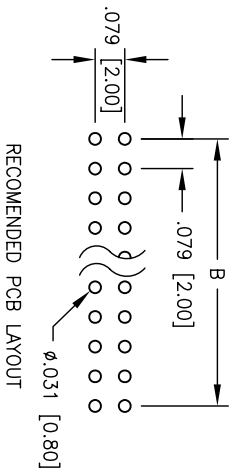


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/12/05	

APPROVED: _____

DATE: _____ TITLE: _____

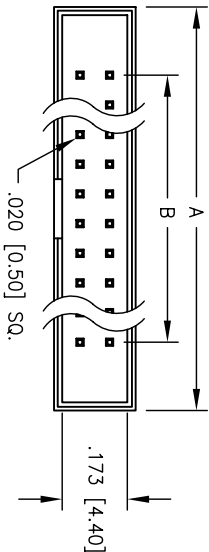

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate on mating area,

Tin over Copper underplate on tails

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55C to +105C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 230 for 5 sec.



A = .079 [2.00] X No. of Spaces + .362 [9.20]
B = .079 [2.00] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
2.0mm BOX HEADER, VERTICAL
PCB, SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED			
ALL DIMENSIONS ARE INCHES [MM]			
TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010
APPROVALS		DATE	
DRAWN	SS	12/12/05	
CHECKED			
APPROVED			
TITLE			
2.0mm BOX HEADER, VERTICAL			
PCB, SELECTIVE GOLD PLATED			
ADAM TECH			
909 Rahway Avenue, Union, NJ 07083			
Phone: 908-687-5000 Fax: 908-687-5710			
REF:	SCALE: NTS	SHEET 1	OF 1
SIZE		PART NO.	REV.
X		2BHR-XX-VSGA	-

6

5

4

3

2

1