


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/2/19	
A		UPDATED SPEC.	3/5/24	JJ/YC

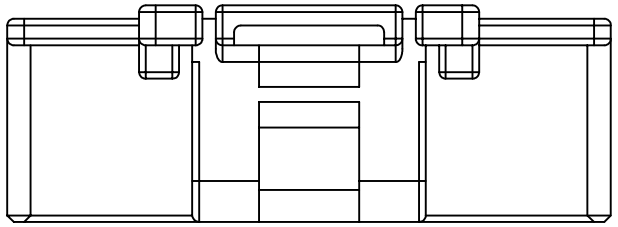

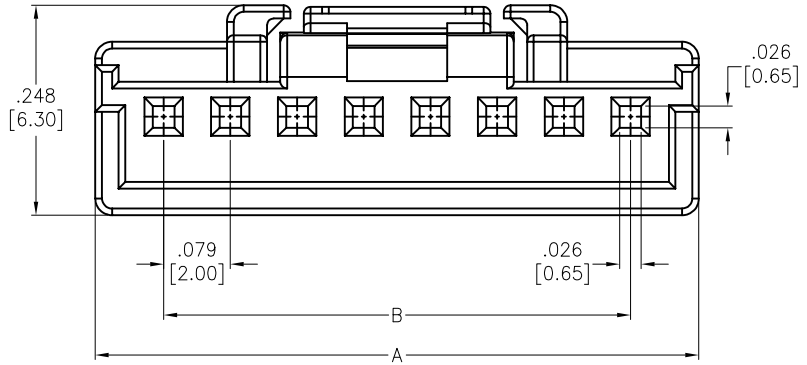




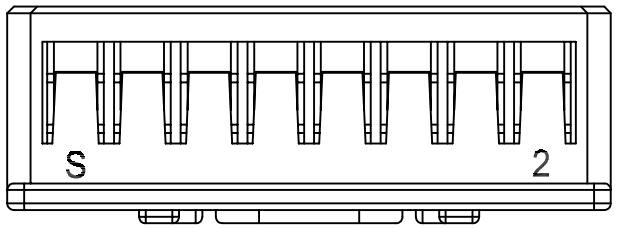

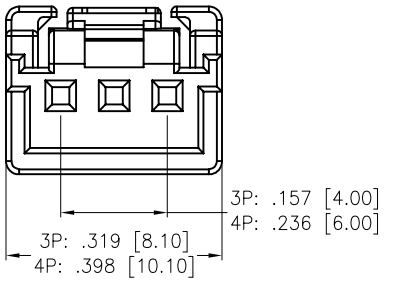

3P–4P



2P

Positions: 2 thru 15
A = .079 [2.00] x No. of Positions +.083 [2.10]
B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Natural
Electrical:
Voltage rating: 125V AC/DC
Current rating: 3A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
–40°C to +105°C (A)
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	9/2/19
CHECKED	BC	9/2/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	2CH-R-XX	A

REF: S00111C | SCALE: NTS | SHEET 1 OF 1