

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/5/20	
A		UPDATE SPEC.	9/3/21	LH/AC
B		UPDATE SPEC.	10/15/21	LH/AC
C		UPDATE DRAWING	9/16/22	LH/AC
D		UPDATE DRAWING	2/17/23	WX/AC
E		UPDATE DRAWING	8/8/24	LH/AC1
F		UPDATE SPEC.	8/14/25	WY/AC

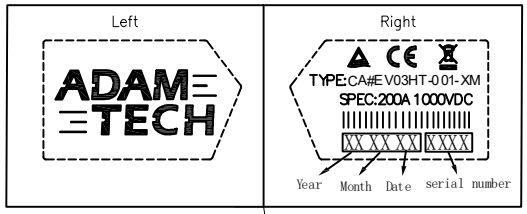

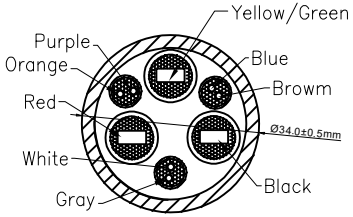


SECTION A–A

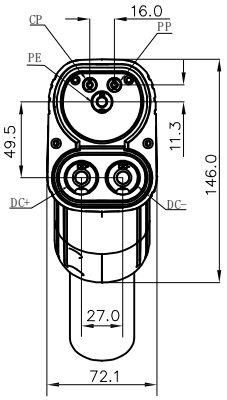

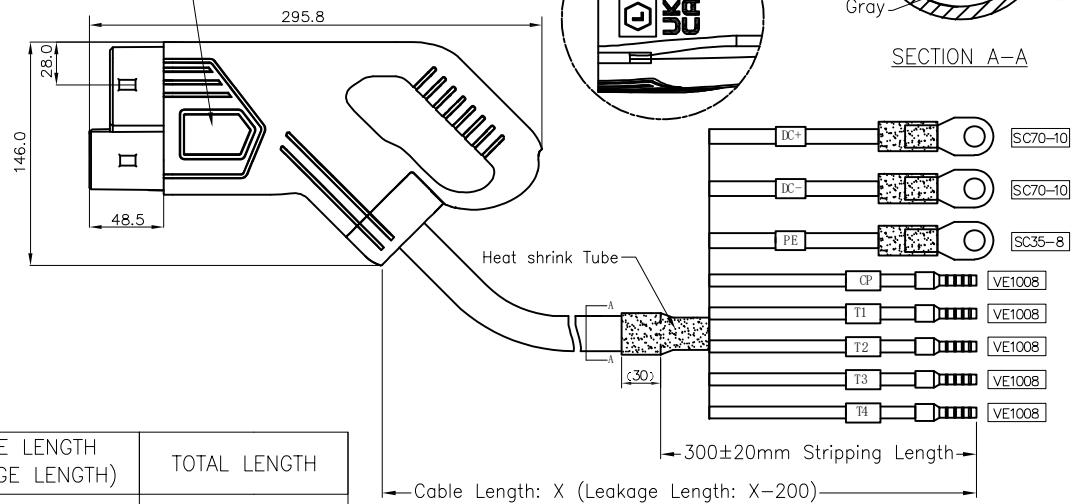

ADAM TECH P/N	CABLE LENGTH (LEAKAGE LENGTH)	TOTAL LENGTH
CA #EV03HT-001-3M	2800±30mm	3000±50mm
CA #EV03HT-001-5M	4800±30mm	5000±50mm

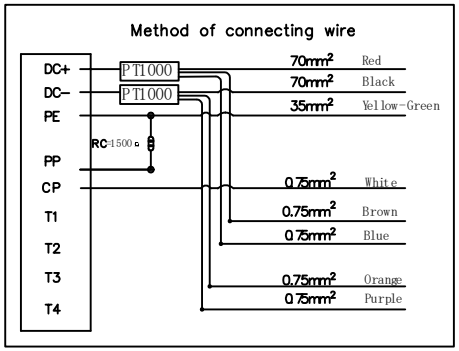

SPECIFICATIONS:

Material:
Insulator: PC, PA66, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy, Silver plated surface

Electrical:
Current rating: 200A
Voltage rating: 1000 VDC
Insulation resistance: 500MΩ min
Dielectric withstanding voltage: 3,000VAC

Mechanical:
Mechanical life: unloaded plugged: >10,000
Insertion and Extraction Force: <100N

Temperature Rating:
-30°C to +50°C

Environmental:
Waterproof grade: IP55
Lead free, RoHS compliant

RoHS COMPLIANT

Charging Plug: according to IEC62196-1/3 2014
Charging cable: 2x70mm²+35mm²+(2x0.75mm²)(P2)+2x(2x0.75mm²) (outer leather material TPU)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

DRAWN	OW	3/5/20
CHECKED	AC	3/5/20
APPROVED		

CONFIDENTIAL AND PROPRIETARY
© Adam Tech. All rights reserved. This document contains confidential and proprietary information belonging to Adam Tech. It is provided solely for design and reference purposes by authorized parties. Any reproduction, distribution, display, or disclosure to third parties, in whole or in part, without the prior written consent of Adam Tech, is strictly prohibited. Adam Tech retains all rights, including copyright, trademark, trade secret, and all other intellectual property rights worldwide.

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
adam-tech.com

TITLE
CABLE ASSEMBLY EV CHARGER
CCS TYPE 2 DC VEHICLE CONNECTOR 200A 70MM²

SIZE	PART NO.	REV.
X	CA #EV03HT-001-XM	F

REF:	SCALE:	SHEET
S00199C	NTS	1 OF 1