
Rev	AWO #	Description	Date	Appr
-		RELEASED	8/11/16	
A		ADDED 1FT LENGTH	5/1/19	

APPROVED: _____

DATE: _____ TITLE: _____

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

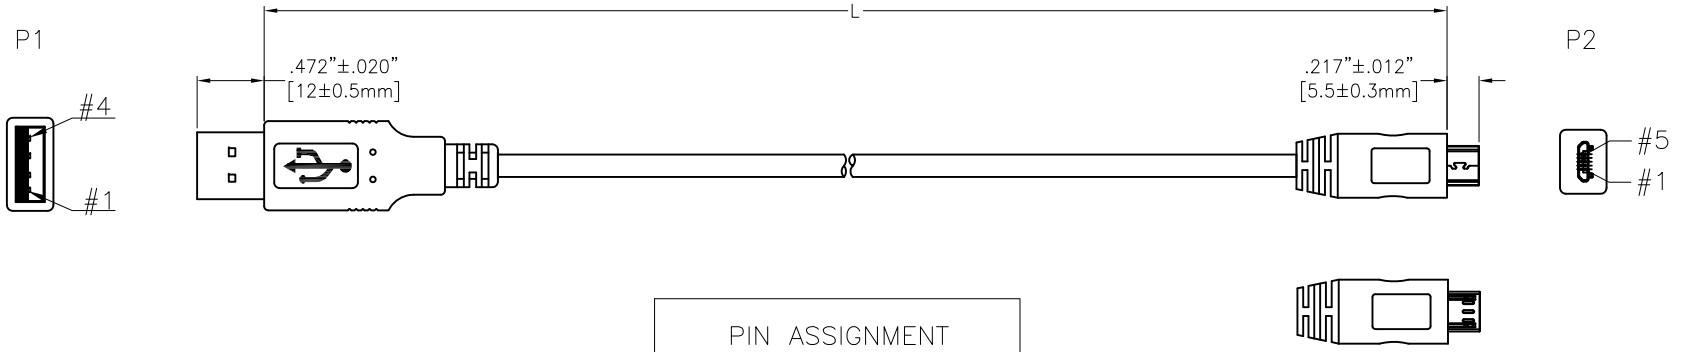

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
S	BRAID	S

ADAM P/N	DIM. L
CA-USB-AM/MCBM-1FT	12.00" ±.50" [305 ±12.7mm]
CA-USB-AM/MCBM-3FT	36.024" ±1.181" [915 ±30mm]
CA-USB-AM/MCBM-6FT	72.047" ±1.181" [1830 ±30mm]
CA-USB-AM/MCBM-10FT	120.0" ±1.181" [3048 ±30mm]

SPECIFICATIONS:

Connector:

P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC, rated UL 94V-0

P2= Micro USB B-Type Plug, Insulator Color: Black, Overmold Color: Black, 50P PVC, rated UL 94V-0

Cable:

UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24), Jacket Color: Black.

Electrical Test:

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	8/11/16
CHECKED	CH	8/11/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A TO MICRO USB B-TYPE PLUG, UL2725 (28/24)

SIZE	PART NO.	REV.
X	CA-USB-AM/MCBM-XFT	A

REF: S00087T | SCALE: NTS | SHEET 1 OF 1