
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/29/17	
A		UPDATE DRAWING	11/8/24	LH/FH
B		UPDATE DIM.	11/29/24	LH/FH

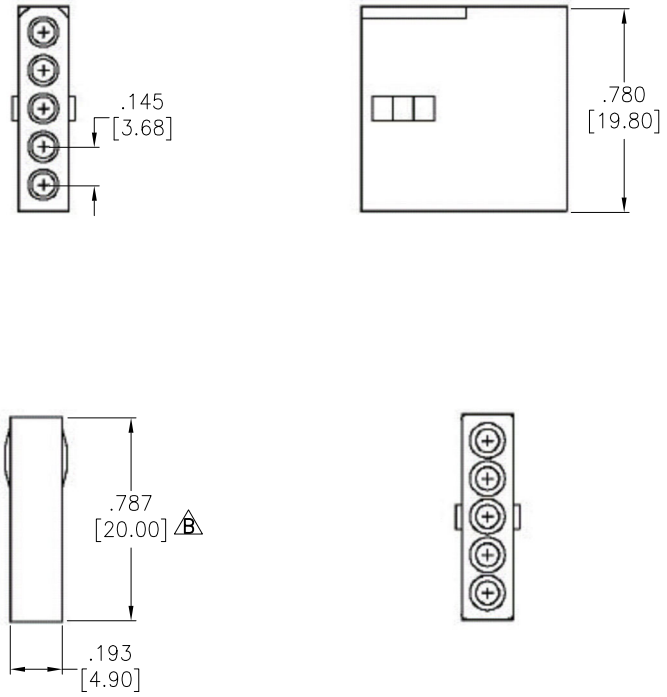

SPECIFICATIONS:
Material:
Insulator: Nylon. rated UL94V–2
Insulator color: Natural
Electrical:
Current rating: 5A AC/DC
Voltage rating: 250V AC/DC
Insulation resistance: 1000 Mohms min
Withstand voltage: 1500 VAC/minute
Temperature range: –25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/29/17
CHECKED	RC1	9/29/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.062"(1.58MM) DIA, 3.68MM PITCH CONNECTOR
HOUSINGS, FEMALE, 5 POSITION, VERTICAL, CONVEX

SIZE	PART NO.	REV.
X	DMB-CF-05-V-WC	B

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1