
Rev	AWO #	Description	Date	Appr
-		RELEASED	12/01/10	

APPROVED: _____

DATE: _____ TITLE: _____

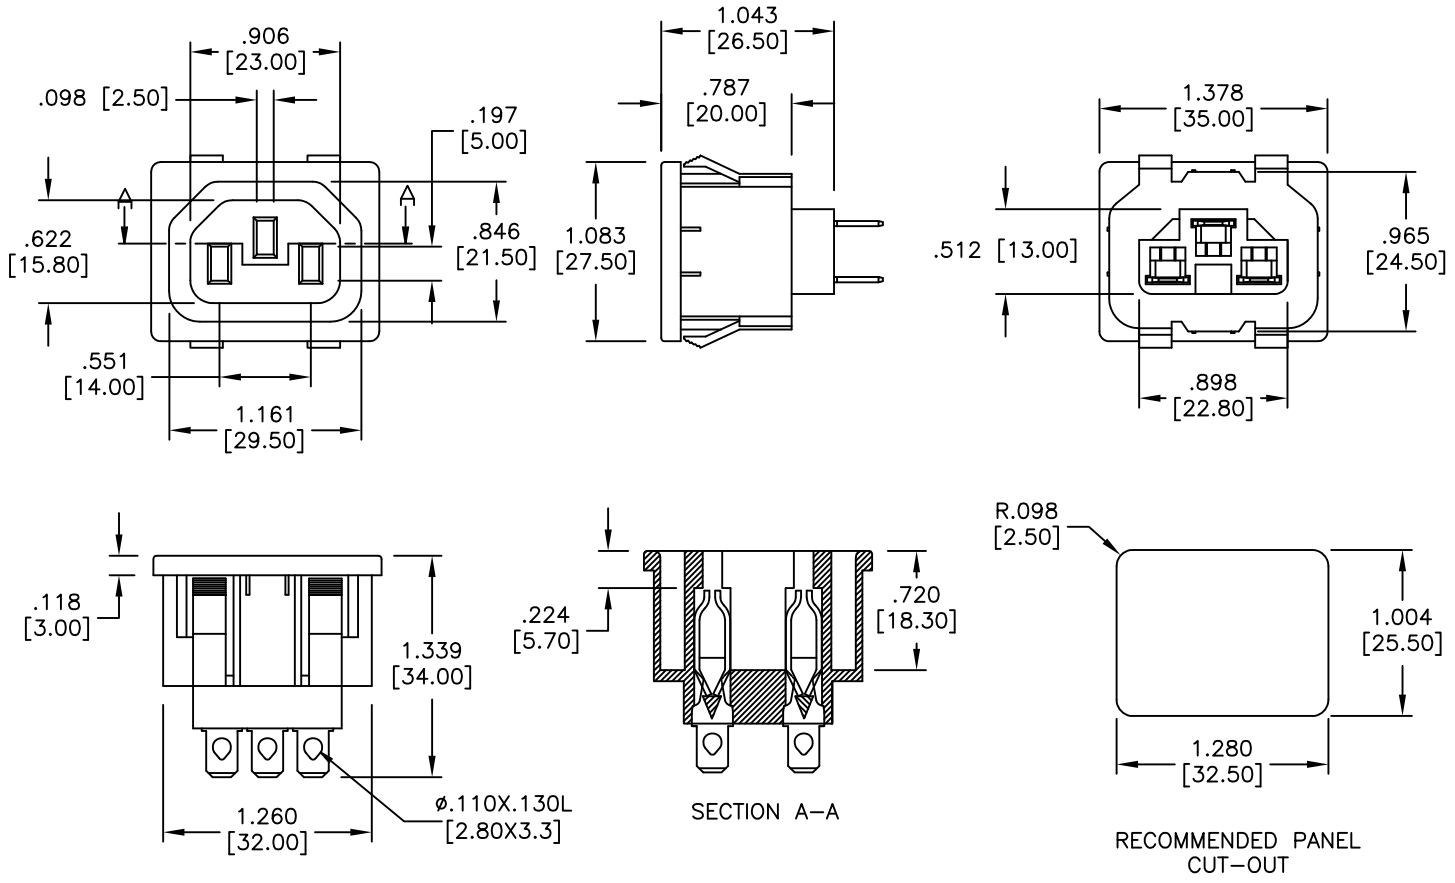

SPECIFICATIONS:
Material:
Insulator: Nylon 66, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Brass , Nickel plated
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC
Current rating: UL & CSA: 15 Amps max
VDE: 10 Amps max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +70°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	12/01/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC FEMALE OUTLET, SNAP-IN
PANEL MOUNT, SPECIAL CONTACT

SIZE	PART NO.	REV.
X	IEC-D-1-EF-C2	-

REF: S00037T | SCALE: NTS | SHEET 1 OF 1