

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/2/21	


APPROVED: _____


DATE: _____ TITLE: _____

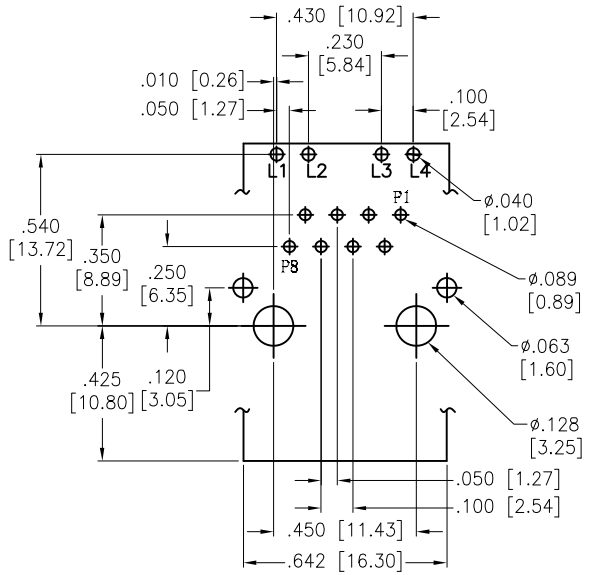



RECOMMENDED PCB LAYOUT
(COMPONENT SIDE VIEW)




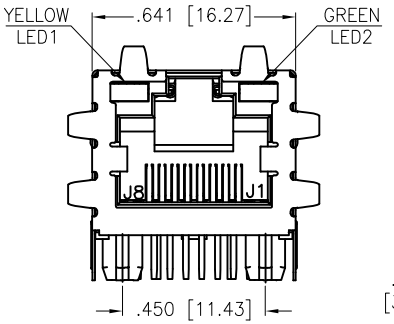

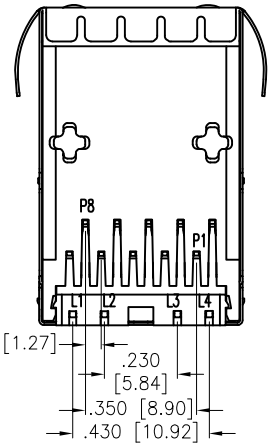


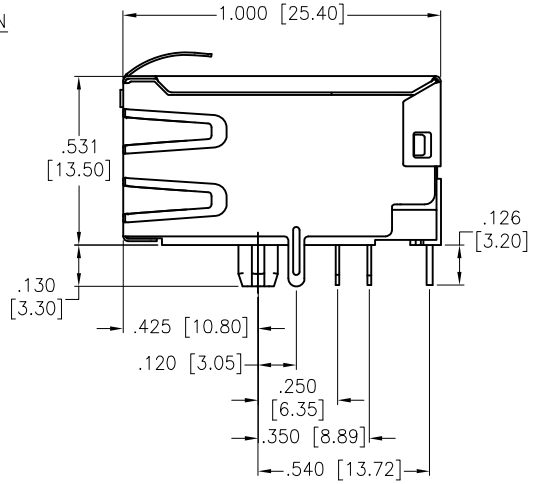





LEFT LED



RIGHT LED

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shield: Stainless Steel, Pre-Soldering
Plating:
Round contact
Gold over Nickel underplate overall
Flat contact
Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
Electrical:
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 1500 VAC or 2250 VDC for 1 minute
Temperature Rating:
Operating temperature: 0°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	3/2/21
CHECKED	TY	3/2/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
MODULAR JACK GANGED, 1 PORT, 8P8C
W/ LED1 YELLOW, LED2 GREEN


SIZE	PART NO.	REV.
X	MTJ-88SX1-FSD-PG-LG-M14Y	-

REF: S00101C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

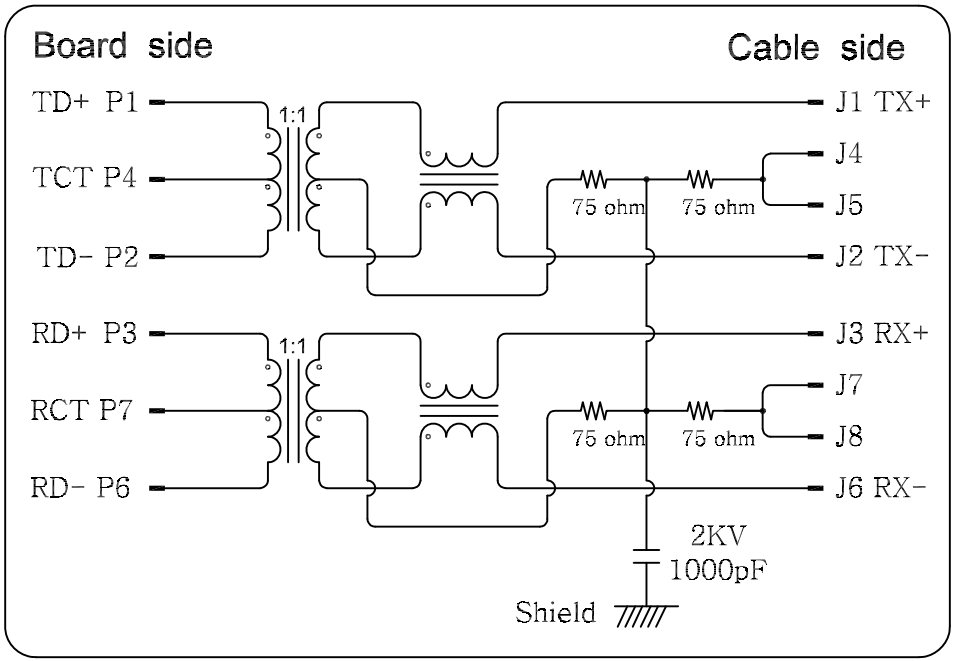

ELECTRICAL CHARACTERISTICS :

1. INSERTION LOSS :
   - 1~100 MHz −1.0dB MAX.

2. RETURN LOSS(LOAD 100Ω) :
   - 1~30 MHz −18dB MIN
   - 30~60 MHz −16dB MIN
   - 60~80 MHz −12dB MIN

3. COMMON MODE REJECTION
   - 1~100 MHz −30dB MIN

4. CROSS TALK
   - 1~100 MHz −30dB MIN

5. INDUCTANCE @ 100KHz, 0.1V, 8mA DC BIAS
   - (P1−P2),(P3−P6) : 350 uH MIN

6. DCR
   - (J1−J2),(J3−J6) : 1.2Ω MAX

7. HI−POT TEST
   - PCB SIDE TO CABLE SIDE : 1500VAC 60S OR 2250VDC 60S

8. TURNS RATION 100KHz
   - (P1−P2) : (J1−J2) = 1:1 ±%3
   - (P3−P6) : (J3−J6) = 1:1 ±%3

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	3/2/21
CHECKED	TY	3/2/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
MODULAR JACK GANGED, 1 PORT, 8P8C
W/ LED1 YELLOW, LED2 GREEN

SIZE	PART NO.	REV.
X	MTJ-88SX1-FSD-PG-LG-M14Y	.

REF: S00101C | SCALE: NTS | SHEET 2 OF 2