

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/14	
A		REVISED LED	7/14/15	AY/NP
B		UPDATE DRAWING	11/13/24	LH/MC

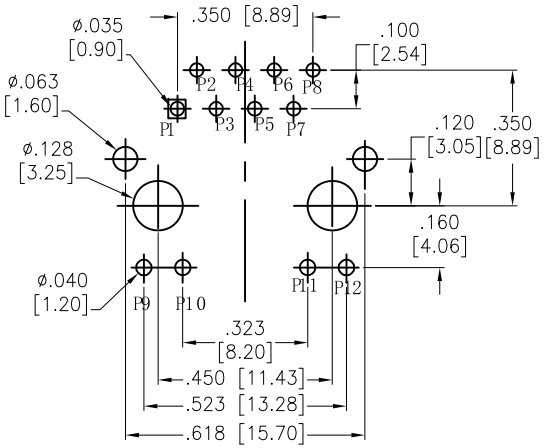

RECOMMENDED PCB LAYOUT

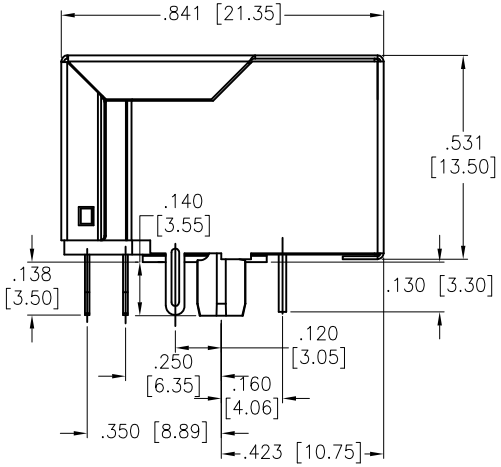

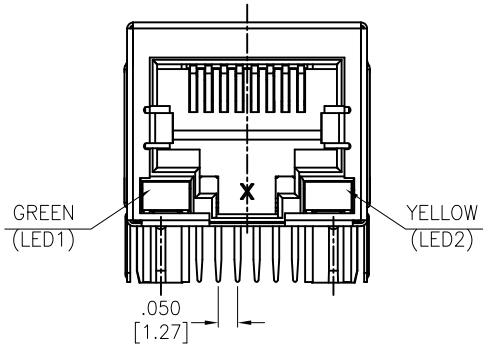

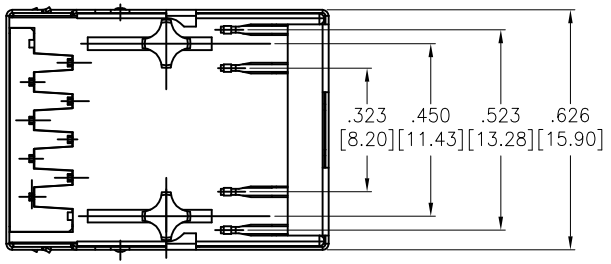

SPECIFICATIONS:

Material:

Housing: Thermoplastic, rated UL 94V–0, Color: Black

Contacts: Copper Alloy

Shield: Brass, Nickel plated

Plating:

Round contact

Gold over Nickel underplate overall

Flat contact

Gold over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 150 VAC

Contact Resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1500V AC or 2250V DC

Temperature Rating:

Operating temperature: –40°C to +85°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/23/14
CHECKED	GC	9/23/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK , 1 PORT, 8P8C W/ LED1 GREEN, LED 2 YELLOW


SIZE	PART NO.	REV.
X	MTJ-88TX1-FSD-LH-M4-A	B

REF: S00005C | SCALE: NTS | SHEET 1 OF 2

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

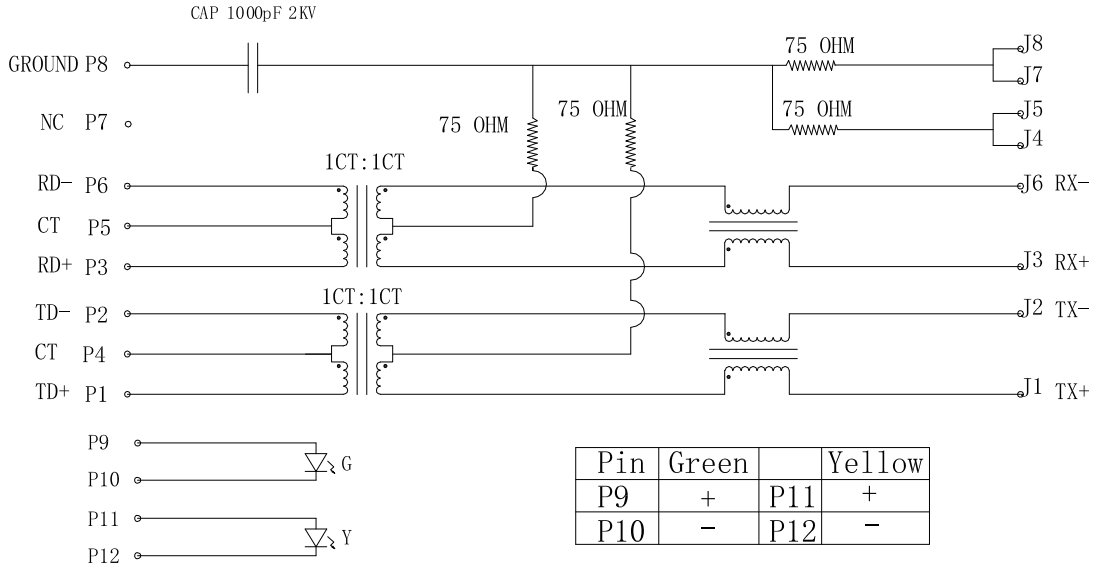

Pin	Green		Yellow
P9	+	P11	+
P10	-	P12	-

Electronical Specifications:

1. Turn Ratio @100KHz: (P1~P2):(J1~J2) = 1:1±5%
   (P3~P6):(J3~J6) = 1:1±5%
2. Primary Inductance: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
3. DC Resistance:(J1~J2):(J3~J6) 1.2 OHMS MAX
4. Insertion Loss: 1-100MHz -1.2dB MAX
5. Return Loss: 1-30MHz -16dB MIN
   30-60MHz -12dB MIN
   60-80MHz -10dB MIN
6. CROSS TALK: 1-100MHz -30dB MIN
7. COMMON TO COMMON MODE ATTENUATION: 1-100MHz -30dB MIN
8. Isolation: PHY Side to Line Side: 1500VAC or 2250VDC

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	AY	9/23/14
CHECKED	GC	9/23/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK , 1 PORT, 8P8C W/ LED1 GREEN, LED 2 YELLOW

SIZE	PART NO.	REV.
X	MTJ-88TX1-FSD-LH-M4-A	B

REF: S00005C | SCALE: NTS | SHEET 2 OF 2