


**SERIES 781**  
**SPDT SLIM LINE MIDGET 12A POWER RELAY**

**BENEFITS:**

- 12 AMP CONTACT RATING
- PANEL/DIN COVER FLANGE ADAPTER
- TOP/BOTTOM COVER FLANGE ADAPTER
- L.E.D. STATUS LAMP
- FINGER GRIP RIBBED COVER
- WRITE ON PLASTIC I.D. TAG
- HIGH TECH GRAY COLOR WITH FROSTED SEMI-TRANSPARENT COVER.

**COMPARISON OF FEATURES**  
**MAGNECRAFT IDEC**




**GENERAL SPECIFICATIONS**


TERMINALS: SOLDER PLUG-IN OR PRINTED CIRCUIT.  
 CONTACT MATERIAL: ALL CONTACTS SOLID SILVER CADMIUM OXIDE.  
 CONTACTS RATED 12 AMPS, 120/240 VAC 12 AMPS, 30 VDC  
 1/6HP, 120 VAC  
 1/3HP, 240 VAC

COIL POWER AT NOMINAL VOLTAGE:  
 AC: 0.9 VA, 60 HZ  
 DC: 0.7 WATTS

STANDARD COVER

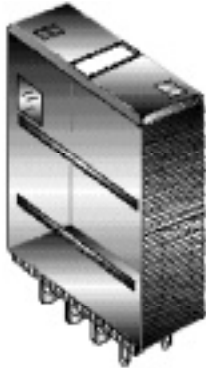

STANDARD COVER WITH PANEL/DIN ADAPTER

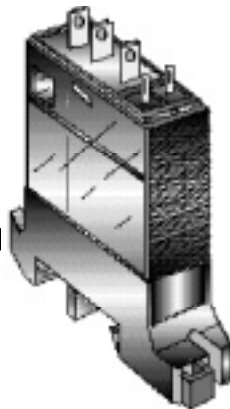


STANDARD COVER WITH TOP/BOTTOM FLANGED ADAPTER



**P.C. LAYOUT**

VIEWED FROM COMPONENT SIDE



**MATING SOCKETS AVAILABLE**

- 1** FINGER SAFE SCREW TERMINAL TYPE FOR PANEL OR DIN RAIL WITH HOLD-DOWN EJECTOR LEVER.
- 2** PANEL MOUNT TYPE.
- 3** P.C. TYPE.

**REPLACES IDEC RH1-B & RH1-V2 SERIES RELAYS**

**WIRING DIAGRAM**

Viewed from Pin End

