

PANEL MOUNT INDICATOR, NON-RELAMPABLE

LED TECHNOLOGY

MOUNTING HOLE, Ø 0.50"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
LED 12V SERIES				
WL-1091QM1-12V	RED	12V-14V	20mA	100,000
WL-1091QM5-12V	GREEN	12V-14V	20mA	100,000
WL-1091QM7-12V	YELLOW	12V-14V	20mA	100,000
LED 24V SERIES				
WL-1091QM1-24V	RED	24V-28V	20mA	100,000
WL-1091QM5-24V	GREEN	24V-28V	20mA	100,000
WL-1091QM7-24V	YELLOW	24V-28V	20mA	100,000

NOTES


1. Recommended panel thickness
0.030" to 0.090"
2. .187" terminals are standard
3. Storage temperature
 T_{STG} : -25°C - +80°C
4. Ambient temperature
 T_A : -20°C - +60°C
5. DC operation only
6. Voltage tolerance
 V_{OP} : ±10%
7. Body material
Nylon, white
8. Lens material
Polycarbonate
9. Bezel material
Stainless steel
10. Anode (+)
Marked above terminal
11. .250 quick connects
available upon request

CERTIFICATIONS

UL (E340667), RoHS



DIMENSIONAL CHARACTERISTICS

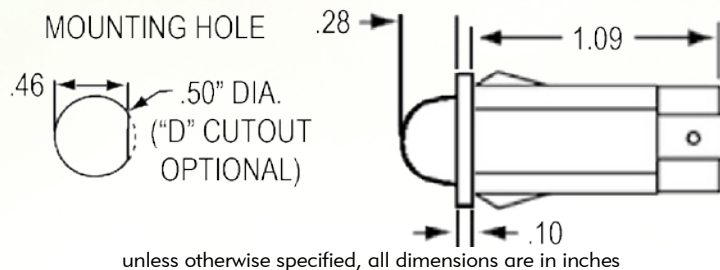

OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

