



Heavy Duty/Extra Heavy Duty

22

- Manufactured of 100% Nylon
- Non-corrosive
- Maximum holding ability
- Specifications: Type 6/6 Nylon

- Self-extinguishing — UL 94 Flam. Class: V-2
- Stocked in natural, weather-resistant black, and heat stabilized black. Other colors upon request.

- Natural operating temperatures from -40°F (-40°C) to 185°F (85°C). Weather resistant from -40°F (-40°C) to 176°F (80°C). Heat stabilized from -40°F (-40°C) to 221°F (105°C).
- Recognized under the component program of Underwriters Laboratories, Inc. File No. E 57800. 


14.5" HEAVY DUTY

PART NO.	STYLE	LENGTH	BUNDLE DIA. MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PACKAGE QUANTITY
10038	NATURAL	14.5" (373 mm)	3/16" - 4" (4.5-102 mm)	120 LBS. (55 kg)	MS-3367-3-9	100/BAG
10039	BLACK WEATHER RESISTANT				MS-3367-3-0	100/BAG
08403	BLACK HEAT STABILIZED					100/BAG
08378	NATURAL	14.5" (373 mm)	3/16" - 4" (4.5-102 mm)	120 LBS. (55 kg)	MS-3367-3-9	50/BAG
08382	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG

21" HEAVY DUTY

10606	NATURAL	21" (533mm)	3/16" - 6" (4.5 -152mm)	120 LBS. (55 kg)	MS-3367-3-9	50/BAG
10608	BLACK WEATHER RESISTANT				MS-3367-3-0	
10607	BLACK HEAT STABILIZED					

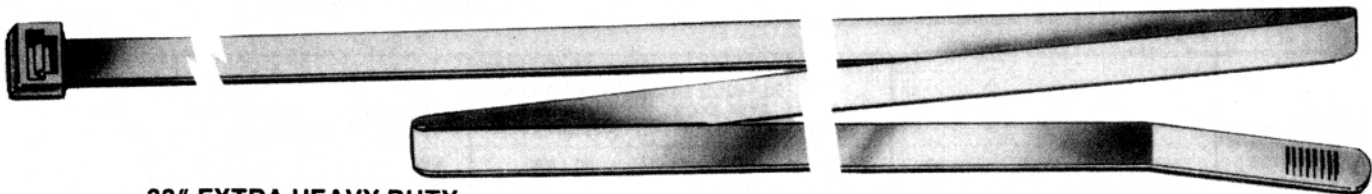
24" HEAVY DUTY

10612	NATURAL	24" (609mm)	3/16" - 7" (4.5-177.8mm)	120 LBS. (55 kg)	MS-3367-3-9	50/BAG
10614	BLACK WEATHER RESISTANT				MS-3367-3-0	
10613	BLACK HEAT STABILIZED					

28" HEAVY DUTY

10618	NATURAL	28" (711mm)	3/16" - 8" (4.5 -203mm)	120 LBS. (55 kg)	MS-3367-6-9	50/BAG
10620	BLACK WEATHER RESISTANT				MS-3367-6-0	
10619	BLACK HEAT STABILIZED					

Use with Dennison Cable Tie Mounts (Part No.s 10046, 10079)


33" EXTRA HEAVY DUTY

PART NO.	STYLE	LENGTH	BUNDLE DIA. MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PACKAGE QUANTITY
10049	NATURAL	33" (838 mm)	1/4" - 10" (6.5-254 mm)	175 LBS. (79.6 kg)	25/BAG
10050	BLACK WEATHER RESISTANT				25/BAG

**W I R E S
L I N E
C O R D S
& A C C**