


HIGH FREQUENCY, WITH BUILT-IN CAPACITORS SMD WASHABLE CERAMIC RESONATORS AWSCR

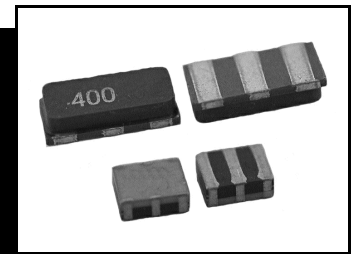

7434, 4741, 3731, 2520

FEATURES:

- Low resonant impedance.
- Excellent environmental resistance.
- Reflow capable.
- High stability washable type.
- Industrial grade.
- Built-in load capacitance.

APPLICATIONS:

- Remote controls.
- Electric appliances.
- Mobile phones, DVD, CD-Rom.
- Microprocessor clocks.
- Automotive controllers.
- Industrial controllers.

STANDARD SPECIFICATIONS

Abracon P/N	Freq. range (MHz)	Resonant Impedance Ω max.	Frequency tolerance	Frequency stability @-20°C to +80°C	Aging in 10 years	Operating temperature	Package Style *
AWSCR[] MGS MGD MGA	2.0~7.99	100 Ω for $2.0 < F < 3.0$ MHz 50 Ω for $3.0 \leq F < 3.5$ MHz 30 Ω for $3.5 \leq F \leq 7.99$ MHz	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	7434
AWSCR[] MTS MTD MTA	8.0~13.0	25 Ω	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	4741
AWSCR[] MVS MVD MVA	8.0~13.0	25 Ω	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	3731
AWSCR[] MXS MXD MXA	13.01~50.0	40 Ω	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	4741
AWSCR[] MCS MCD MCA	13.01~50.0	40 Ω	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	3731
AWSCR[] MSS MSD MSA	20.0~50.0	40 Ω For ≤ 32 MHz 50 Ω For ≤ 40 MHz 60 Ω For ≤ 50 MHz	$\pm 0.5\%$	$\pm 0.3\%$	$\pm 0.3\%$	-20°C to +80°C -40°C to +85°C -40°C to +125°C	2520

*Please see package options and dimensions on page 35A

Please check for availability on M[]D and M[]A Series

Frequency stability: M[]D: $\pm 0.5\%$ typ. -40°C to +85°C
M[]A: $\pm 0.7\%$ typ. -40°C to +125°C

Storage temperature: -40°C to +125°C

We perform IC characterization to match your application.

Please call us for details.


Packaging: Option Tape and Reel (1,000 pcs.) see appendix H.

Marking, see appendix G. Application notes, see appendix A.

Environmental and mechanical specification, see appendix C. Group 6.

Recommended handling, see appendix F.

Test Circuit

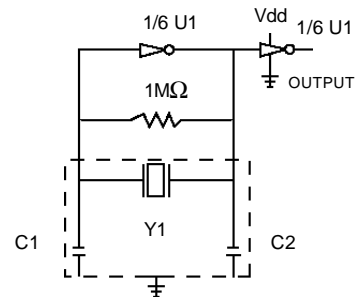

- U1: CD4069UB
74HCU04
Y1: RESONATOR
C1 C2 (Built-in)
- 30pF $\pm 20\%$ (MG and MT Series)
15pF $\pm 20\%$ (MV Series)
15pF $\pm 20\%$ for $F < 26$ M (MX series)
10pF $\pm 20\%$ for $26\text{M} \leq F \leq 50\text{M}$ (MX series)
10pF $\pm 20\%$ (MC Series)
8pF $\pm 20\%$ (MS Series)

ORDERING OPTIONS

AWSCRMXX - Packaging

G, T, V, X, C or S - T (Tape and reel)
S, D or A

NOTE: Left blank if standard • All specifications and markings subject to change without notice

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

29 Journey • Aliso Viejo, CA 92656 • USA
(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

ABRACON
CORPORATION

37
Rev. B
01/2003