

mm inch

RoHS Directive compatibility information
<http://www.nais-e.com/>

FEATURES

1. High sensitivity: 250mW

The power-saving relay is highly sensitive at the nominal operating power of 250 mW (530 mW power consumption on LK relays).

2. High insulation resistance between contact and coil

- Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC65)
- Surge withstand voltage between contact and coil: 10,000 V or more

3. High noise immunity realized by the card separation structure between contact and coil

4. Popular terminal pitch in AV equipment field

5. Space-saving slim type

Base area: Width 11 × Length 24 mm
 Width .433 × Length .945 inch

6. Conforms to the various safety standards

UL/CSA, VDE, TÜV and SEMKO SEV approved

SPECIFICATIONS

Contact

Arrangement	1 Form A	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	Max. 100 mΩ	
Contact material	AgSnO ₂ type	
Rating (resistive load)	Nominal switching capacity	5 A 277 V AC
	Max. switching power	1,385 V A
	Max. switching voltage	277 V AC
	Max. switching current	5 A (AC)
Expected life (min. operations)	Min. switching capacity ^{#1} (Reference value)	100 mA, 5 V DC
	Mechanical (at 180 cpm)	10 ⁶
	Electrical (at 20 cpm) (at rated load)	10 ⁵

Coil

Nominal operating power	250 mW
-------------------------	--------

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *¹ Measurement at same location as "Initial breakdown voltage" section.
- *² Detection current: 10mA
- *³ Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981
- *⁴ Excluding contact bounce time.
- *⁵ Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
- *⁶ Half-wave pulse of sine wave: 6 ms
- *⁷ Detection time: 10 μs
- *⁸ Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

Characteristics

Max. operating speed		20 cpm (at rated load)
Initial insulation resistance* ¹		Min. 1,000 MΩ (at 500 V DC)
Initial * ² breakdown voltage	Between open contacts	1,000 Vrms for 1 min.
	Between contact and coil	4,000 Vrms for 1 min.
Initial surge voltage between contact and coil* ³		10,000 V
Operate time* ⁴ (at nominal voltage)		Max. 15 ms (at 20°C 68°F)
Release time (without diode)* ⁴ (at nominal voltage)		Max. 5 ms (at 20°C 68°F)
Temperature rise (at 70°C)		Max. 35°C with nominal coil voltage and at 5 A contact carrying current (resistance method)
Shock resistance	Functional* ⁵	200 m/s ² {approx. 20 G}
	Destructive* ⁶	1,000 m/s ² {approx. 100 G}
Vibration resistance	Functional* ⁷	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage* ⁸ (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
	Air pressure	86 to 106 kPa
Unit weight		Approx. 12 g .42 oz

TYPICAL APPLICATIONS

- Audio visual equipment
- Office equipment
- Home appliances

ORDERING INFORMATION

Ex. LKS 1a F - 12V

Contact arrangement	Protective construction	Coil voltage(DC)
1a: 1 Form A	F: Flux-resistant type	5, 6, 9, 12, 18, 24V

UL/CSA, TÜV, SEMKO, TV-5 approved type is standard.

- Notes 1. Standard packing Carton: 100 pcs. Case: 500 pcs.
 2. 6 V, 18 V DC types are also available. Please consult us for details.


LK-S

TYPES AND COIL DATA (at 20°C 68°F)


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, mW	Maximum allowable voltage, V DC (at 20°C 68°F)
LKS1aF-5V	5	3.5	0.5	100	50	250	6.5
LKS1aF-6V	6	4.2	0.6	144	41.7	250	7.8
LKS1aF-9V	9	6.3	0.9	324	27.8	250	11.7
LKS1aF-12V	12	8.4	1.2	576	20.8	250	15.6
LKS1aF-18V	18	12.6	1.8	1,296	13.9	250	23.4
LKS1aF-24V	24	16.8	2.4	2,304	10.4	250	31.2

DIMENSIONS

mm inch

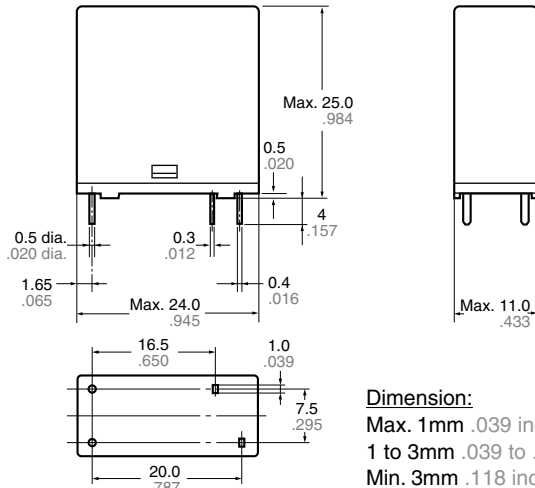

PC board pattern (Bottom view)

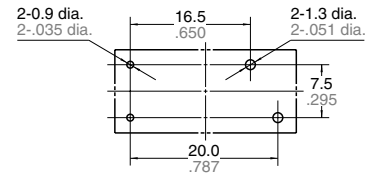


Tolerance: $\pm 0.1 \pm .004$

Schematic (Bottom view)




REFERENCE DATA

1. Max. switching power (AC resistive load)

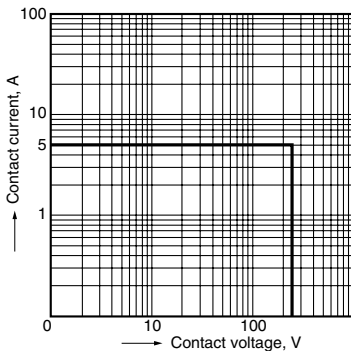


2. Coil temperature rise

Sample: LKS1aF-12V, 6 pcs.
Point measured: coil inside
Contact current: 0 A, 5 A

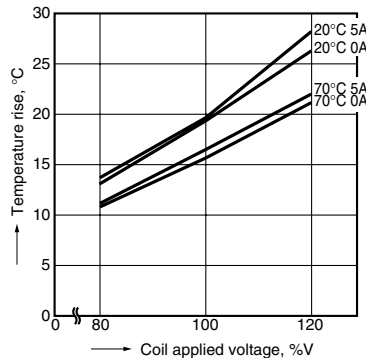


3. Ambient temperature characteristics and coil applied voltage

Contact current: 5 A

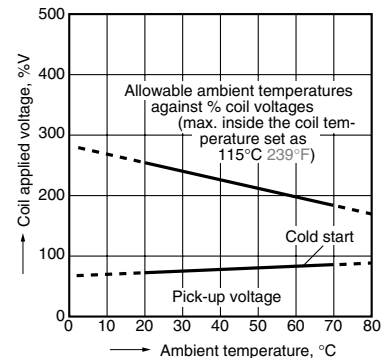


4. Life curve

Operation frequency: 20 times/min.
(ON/OFF = 1.5s: 1.5s)
Ambient temperature: Room temperature

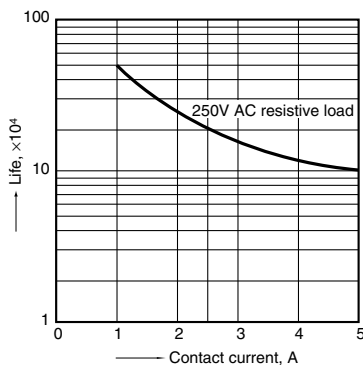


5-(1). Electrical life test
 (5 A 277 V AC, resistive load)
 Sample: LKS1aF-12V, 6 pcs.
 Operation frequency: 20 times/min.
 (ON/OFF = 1.5s: 1.5s)
 Ambient temperature: 20°C 68°F


Circuit:

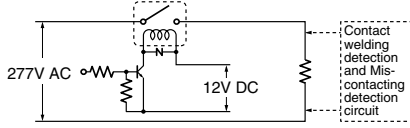

Change of pick-up and drop-out voltage

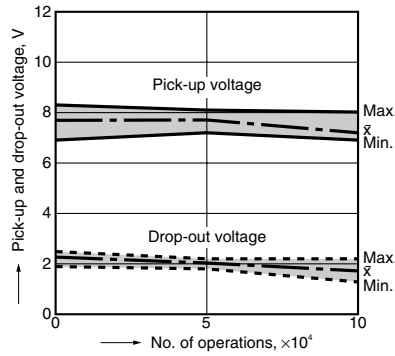


Change of contact resistance

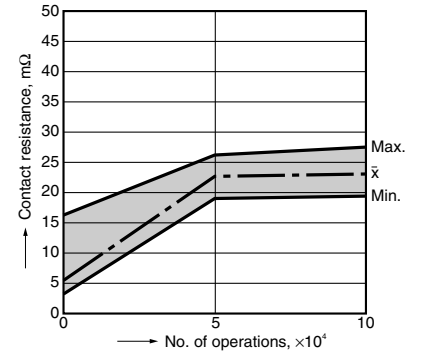


5-(2). Electrical life test
 (UL lamp load test TV-5)
 Tested sample: LKS1aF-12V, 6 pcs.
 • Overload test
 Load: 7.5 A 120 V AC (60 Hz),
 Inrush: 111 A
 Operation frequency: 10 times/min
 (ON: OFF = 1 s: 5 s)
 No. of operations: 50 ope.
 • Endurance test
 Load: 5A 120 V AC (60 Hz),
 Inrush: 78 A
 Operation frequency: 10 times/min
 (ON: OFF = 1 s: 5 s)
 No. of operations: 25,000 ope.

Change of pick-up and drop-out voltage

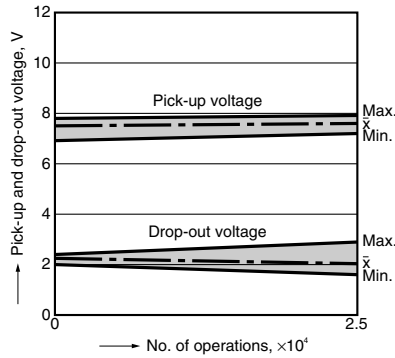

Change of contact resistance

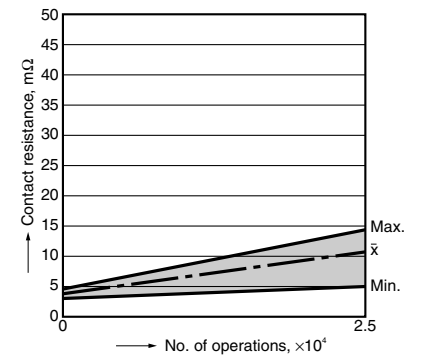

For Cautions for Use, see Relay Technical Information