
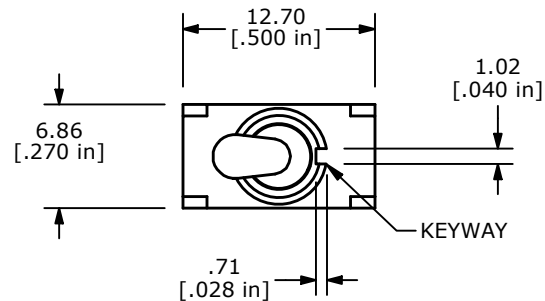
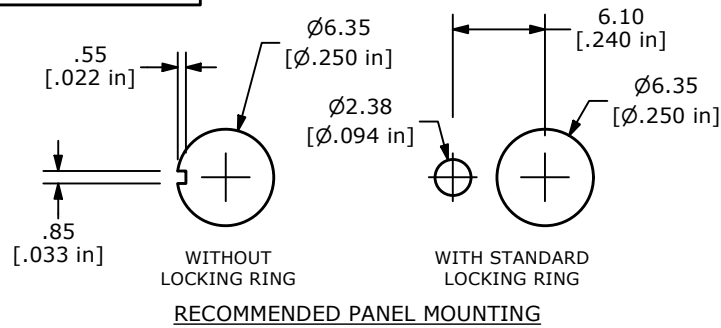
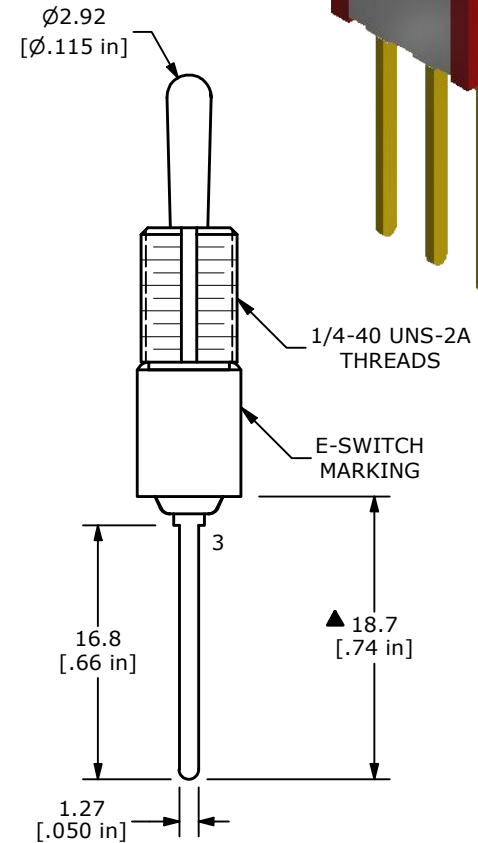
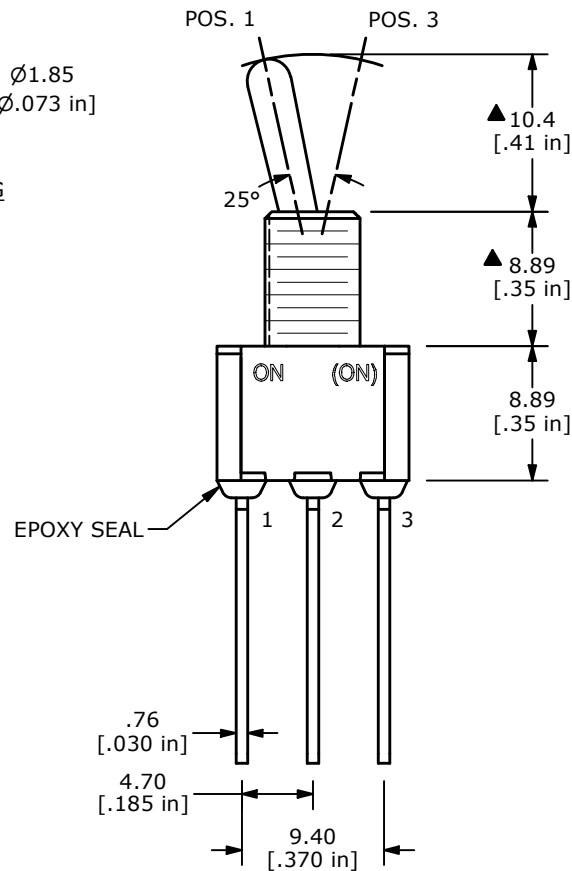



| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | NONE   | (ON)   |
| 2-3               | N/A    | 2-1    |

(ON) = MOMENTARY

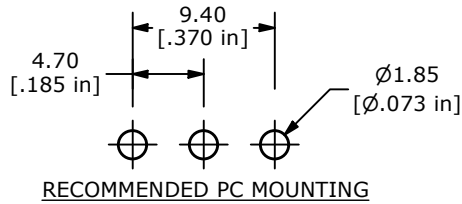

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK  
T100011 - LOCK WASHER - QTY 1  
T100015 - LOCK RING - QTY 1  
T100000 - HEX NUT - QTY 2

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®              |           |    |          | OBJECT ID |
|-----|------------|-------------------|----------|----|------------------------|-----------|----|----------|-----------|
| B   | ECO-101718 | 100 SERIES UPDATE | 03/29/23 | MR | TITLE 100SP2T1B1M51REH |           |    |          | 000022981 |
|     |            |                   |          |    | SCALE                  | DATE      | DR | DWG      | REV       |
|     |            |                   |          |    | 2:1                    | 11/3/2010 | BA | ST111611 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED