SHEET 1 OF 1

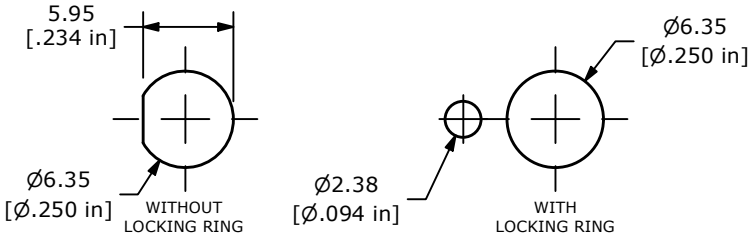

RECOMMENDED PANEL MOUNTING

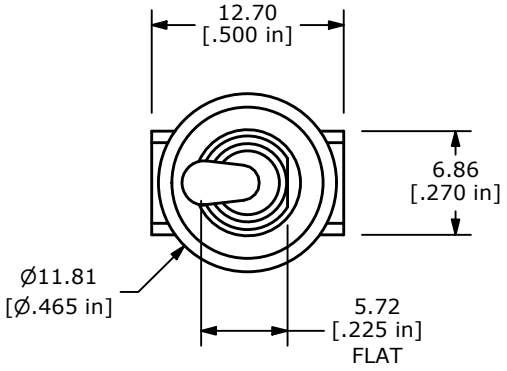

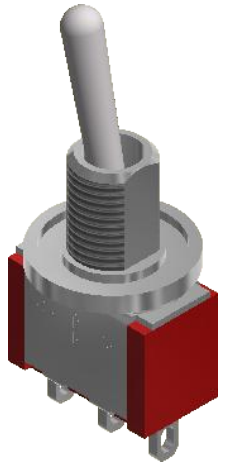

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1



CIRCUIT: SPDT

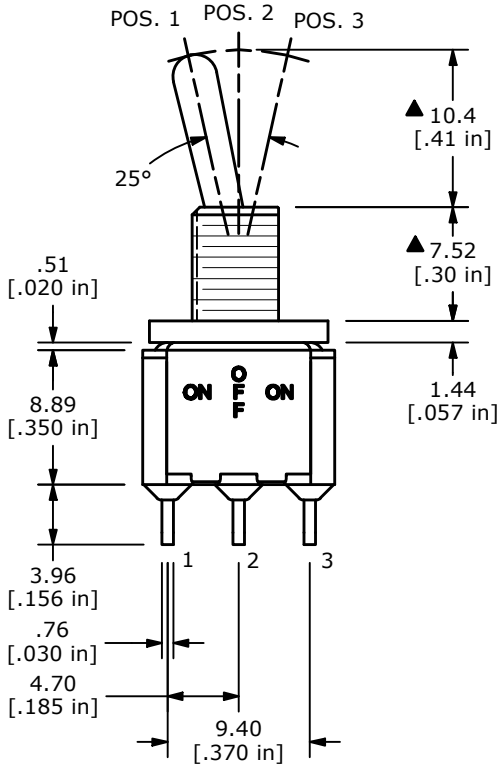

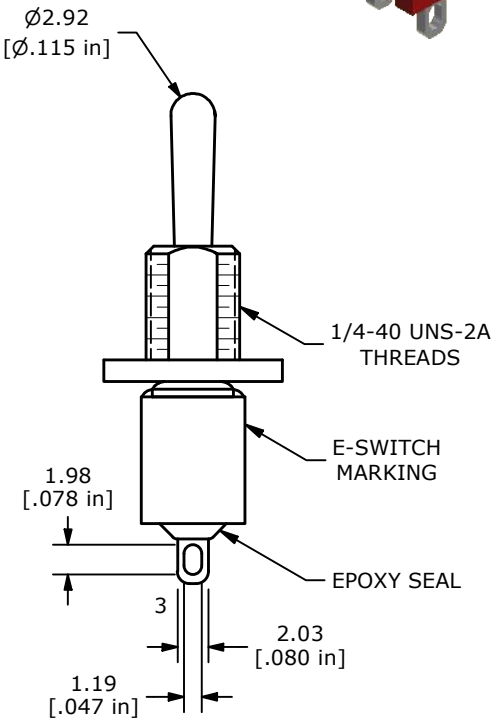

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC
   5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK
   T100011 - LOCK WASHER - QTY 1
   T100002 - LOCK RING - QTY 1
   T100000 - HEX NUT - QTY 2
   T100016 - "O" RING - QTY 1

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-101943	100 SERIES UPDATE	06/20/23	MR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000023014

TITLE 100SP3T1B9M1QEH

SCALE	DATE	DR	DWG	REV
2:1	8/30/2006	BO	ST113042	C