




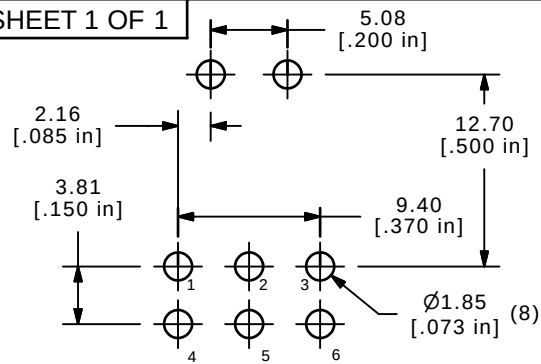

P.C. MOUNTING

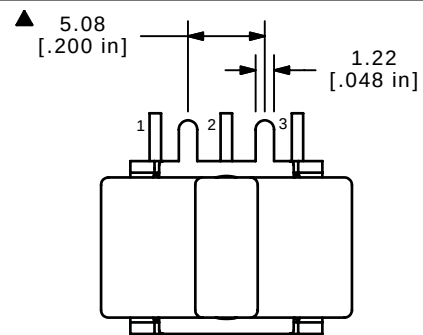


ISOMETRIC

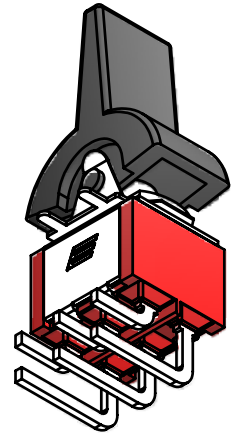

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	ON	(ON)
2-3, 5-6	2-3, 5-4	2-1, 5-4

(ON) = MOMENTARY




CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS @120 VAC (or 28 VDC)
2 AMPS @250 VAC
6. LIFE EXPECTANCY: 40,000 MAKE-AND-BREAK
CYCLES AT FULL LOAD.
7. CONTACT RESISTANCE: 10 Milli-OHMS MAX. INITIAL
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (RoHS) COMPLIANT.

E-SWITCH MARKING
ON OPPOSITE SIDE

RATING

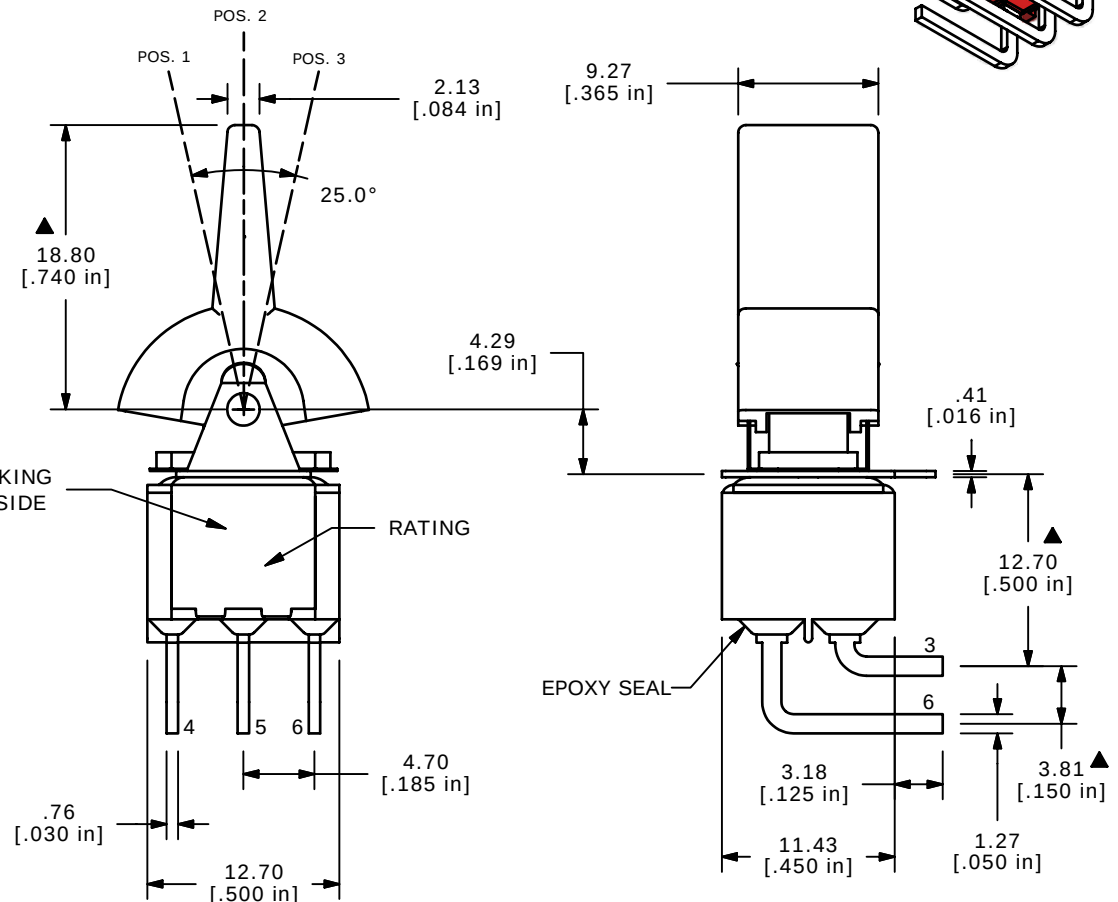

EPOXY SEAL



E-SWITCH®



TITLE 300DP8J2BLKM6QE

A	18502	RELEASED FOR PRODUCTION	5/19/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 5/19/2009

DR BLR

DWG T328004

REV A