

SHEET 1 OF 1

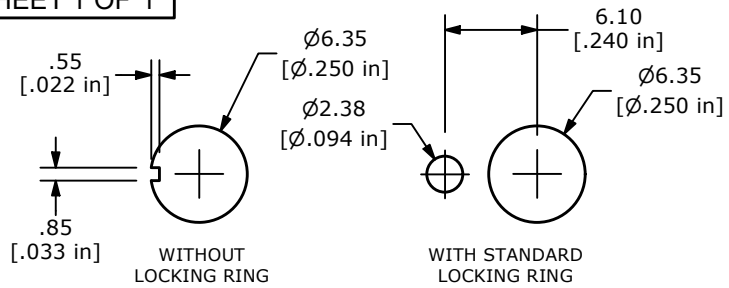


RECOMMENDED PANEL MOUNTING

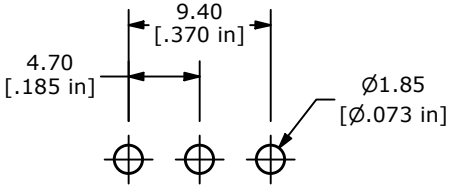



RECOMMENDED PCB LAYOUT


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1




CIRCUIT: SPDT

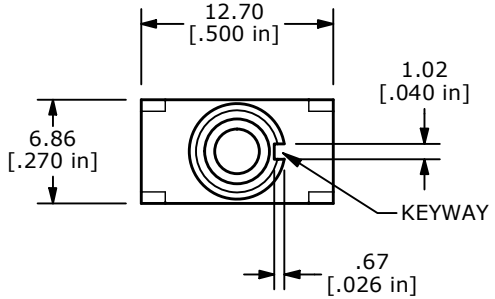

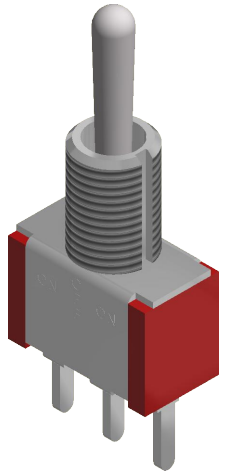

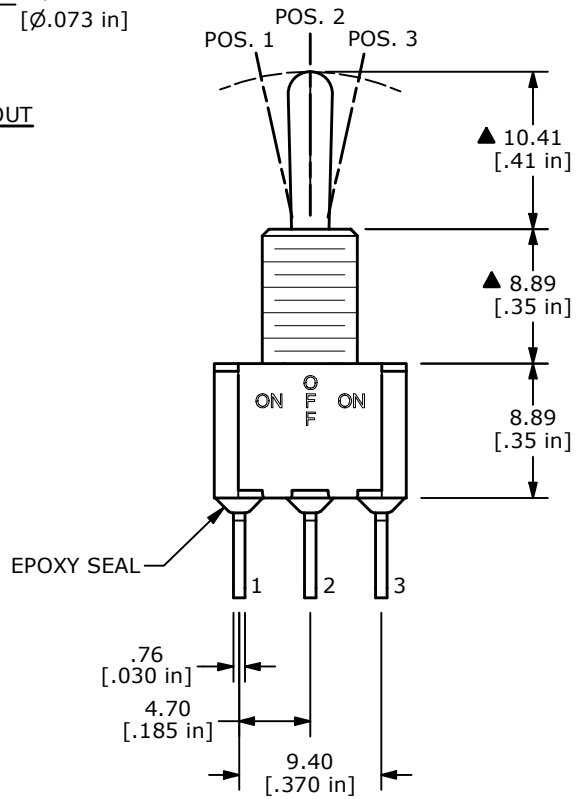

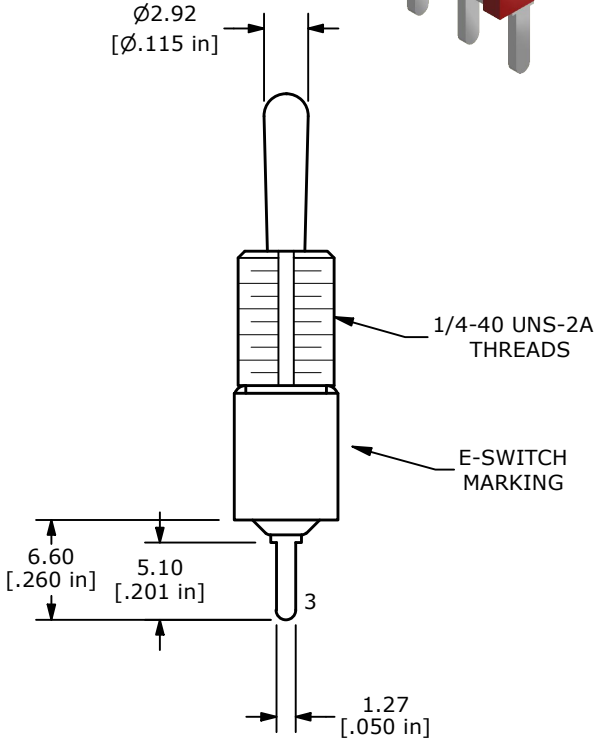

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 2A @ 250 VAC
   5A @ 120 VAC OR 28 VDC
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
▲11. HARDWARE INCLUDED: T100011 - LOCK WASHER (1)
   T100015 - LOCK RING (1)
   T100000 - HEX NUT (2)

REV	ECO NO	DESCRIPTION	DATE	BY
E	ECO-103974	Print update	03/09/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000023008

TITLE 100SP3T1B1M2QEH

SCALE	DATE	DR	DWG	REV
2:1	4/18/2007	TN	ST113013	E