

SHEET 1 OF 1




SPST OFF-(ON)
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
None	1-2


( ) = MOMENTARY

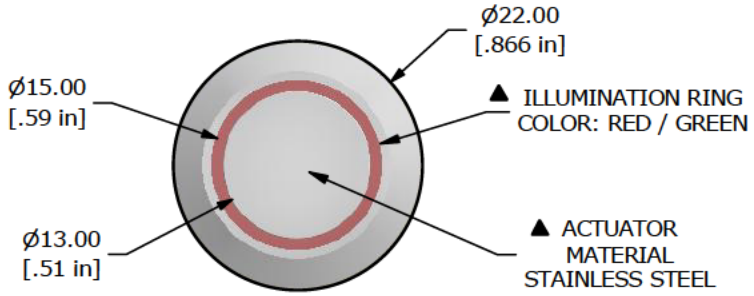




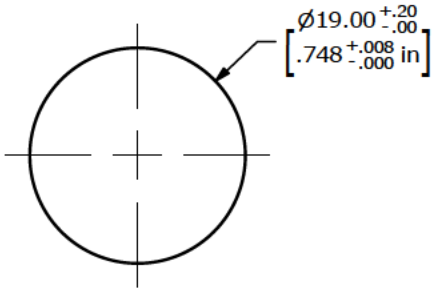

RECOMMENDED PANEL CUTOUT
PANEL THICKNESS 1 - 5mm

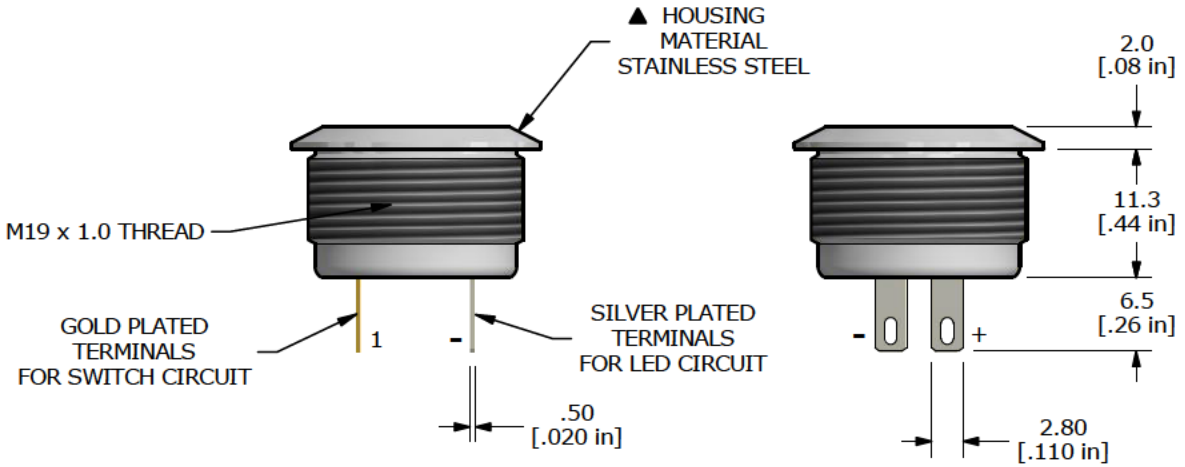

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: Silver
5. RATING: 50mA 24VDC
6. ELECTRIC LIFE: 500,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000 MΩ MIN.
8. DIELECTRIC STRENGTH: 250 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 100mΩ MAX.
10. OPERATING TEMP.: -25°C to +55°C
11. TRAVEL: 0.5mm
12. ▲ DENOTES CRITICAL PARAMETER.
13. INGRESS PROTECTION: IP65
▲14. LED VOLTAGE: RED 1.8V, GREEN 2.8V
15. HARDWARE SUPPLIED: O-RING AND HEXNUT

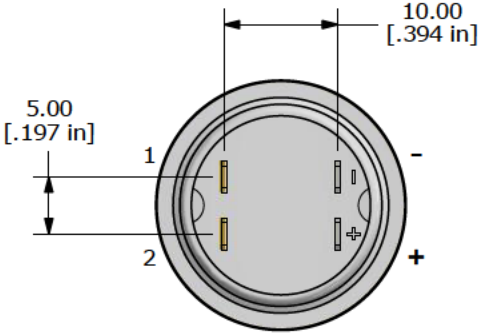

REV	PCR NO	DESCRIPTION	DATE	BY
B	24563	housing update	10/26/20	MW
A	24300	New Release	5/12/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE PVT4FS4SS3G1

SCALE	DATE	DR	DWG	REV
1.5:1	5/11/2020	MW	52-PVT4FS4SS3G1	B