


DIMENSIONS:	
A	3.250" ± 0.063
B	1.615" ± 0.125
C	1.995" ± 0.063
D	2.813" ± 0.063
E	0.826" ± 0.063
F	2.326" ± 0.063
G	0.187" ± 0.015
H	1.490" ± 0.063
J	1.110" ± 0.063

WEIGHT: 1.00LBS.
CHANNEL FRAME
THICKNESS: 0.030"

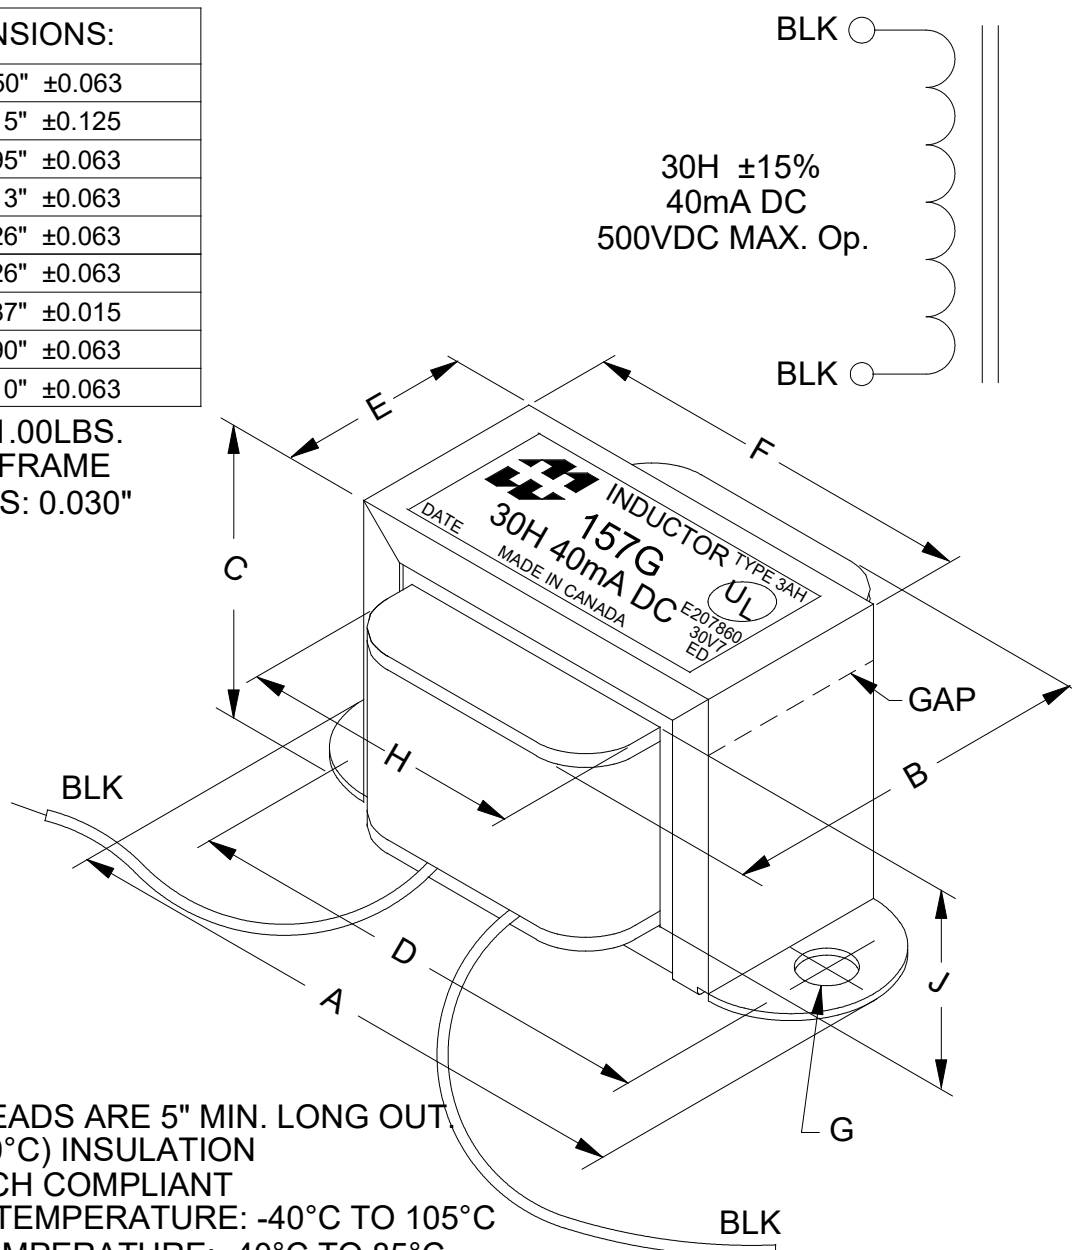

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
CLASS B (130°C) INSULATION
RoHS & REACH COMPLIANT
OPERATING TEMPERATURE: -40°C TO 105°C
STORAGE TEMPERATURE: -40°C TO 85°C

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 100V, 60Hz, 40mA DC, BLK - BLK	30H $\pm 15\%$
DCR	@ 20°C, BLK - BLK =	588.2 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC



ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	09/30/24	RELEASED. C.I.	C. ILIE
			DATE
			09/30/24
			DIM IN(X)MM()

157G