



DIMENSIONS:	
A	2.500" ±0.063
B	3.650" ±0.125
C	3.000" ±0.063
D	2.000" ±0.063
E	2.690" ±0.063
G	0.203" X 0.375" ±0.015

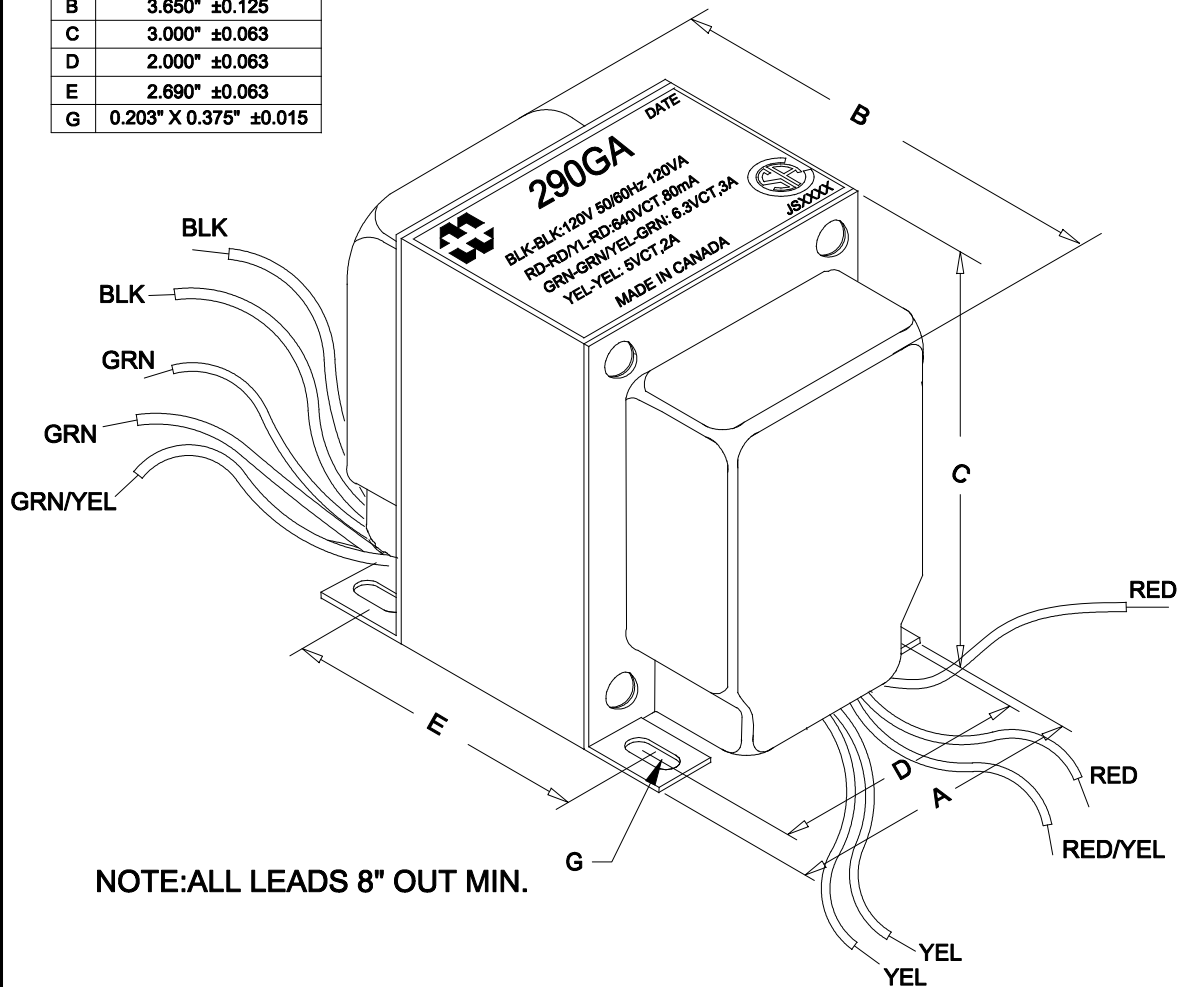

NOTE: ALL LEADS 8" OUT MIN.

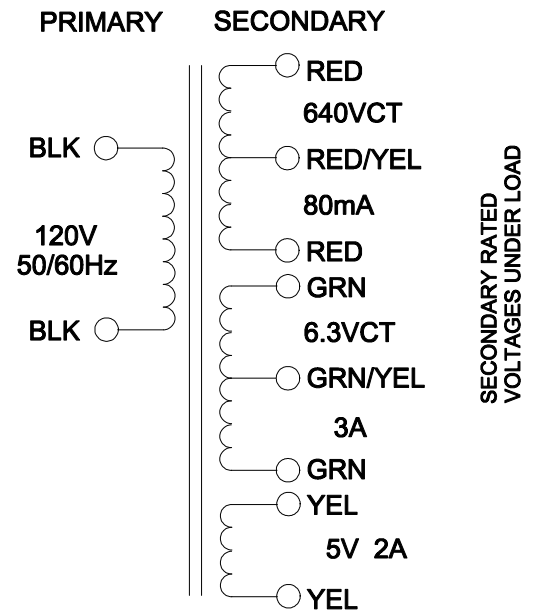

GIBSON GA-6 POWER TRANSFORMER

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, BLK - BLK	200mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	RED - RED/YEL = RED/YEL - RED =	340.9V ±2%
	RED - RED =	681.8V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.291V ±2%
	GRN - GRN =	6.581V ±2%
	YEL - YEL =	5.340V ±2%
DCR	@ 20°C, BLK - BLK =	4.217 Ω ±20%
	@ 20°C, RED - RED =	268.0 Ω ±20%
	@ 20°C, GRN - GRN =	0.077 Ω ±20%
	@ 20°C, YEL - YEL =	0.047 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	Proposed		MANUFACTURING™ 52 RANKIN PLACE, PH # (519) 886-6181			
			WATERLOO, ONTARIO, N2J 3Z5 FAX # (519) 886-9540			
			DWG. BY: D.Hutt	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290GA
			DATE: 16/07/2020	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		