

Product data sheet

Specifications



Harmony, plugin relay socket, mixed contact, 10 A, 250 V, screw clamp, for RXM2 or RXM4 relays

RXZE2M114

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays Harmony Timer Relays
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay RXM 4 C/O Plug-in relay REXL 2 C/O Plug-in relay REXL 4 C/O Plug-in relay 782H 4 C/O
Device short name	RXZ
[Ith] conventional free air thermal current	10 A
Product or Component Type	Socket
Contacts type and composition	4 C/O

Complementary

[Ue] rated operational voltage	< 250 V IEC < 300 V UL
Connections - terminals	Screw clamp terminals, 1 x 0.34...1 x 1 mm ² AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.34...2 x 1 mm ² AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm ² AWG 20...AWG 16) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² AWG 20...AWG 16) solid without cable end
Shape of pin	Flat
Tightening torque	< 1 N.m M3
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Wire stripping length	0.3 in (8 mm)
Contact terminal arrangement	Mixed
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	1.2 in (30 mm)
Net Weight	0.112 lb(US) (0.051 kg)

Environment

IP degree of protection	IP20 conforming to IEC 60529
-------------------------	------------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Dielectric strength	2500 V
Standards	IEC 61984
Product Certifications	UL CSA Lloyd's
Marking	CE
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)

Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3389119404242
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.024 in (2.600 cm)
Package 1 Width	1.220 in (3.100 cm)
Package 1 Length	2.756 in (7.000 cm)
Package weight(Lbs)	1.975 oz (56.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.992 in (7.600 cm)
Package 2 Width	3.504 in (8.900 cm)
Package 2 Length	6.102 in (15.500 cm)
Package 2 Weight	21.164 oz (600.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Height	11.811 in (30.000 cm)
Package 3 Width	11.811 in (30.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	27.445 lb(US) (12.449 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.6 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	0.5 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	48
Circularity Profile	No need of specific recycling operations
Take-back	No

Dimensions Drawings


Dimensions

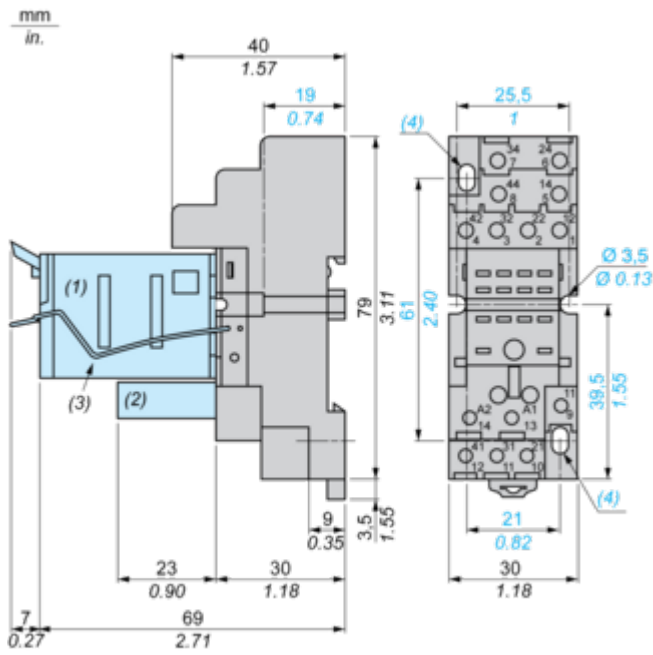

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$


Connections and Schema

Wiring Diagram

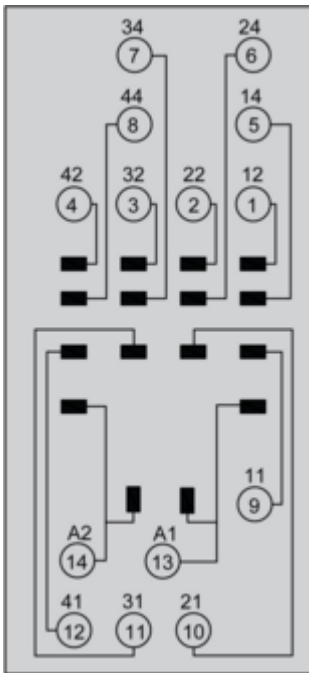

Technical Illustration

Dimensions

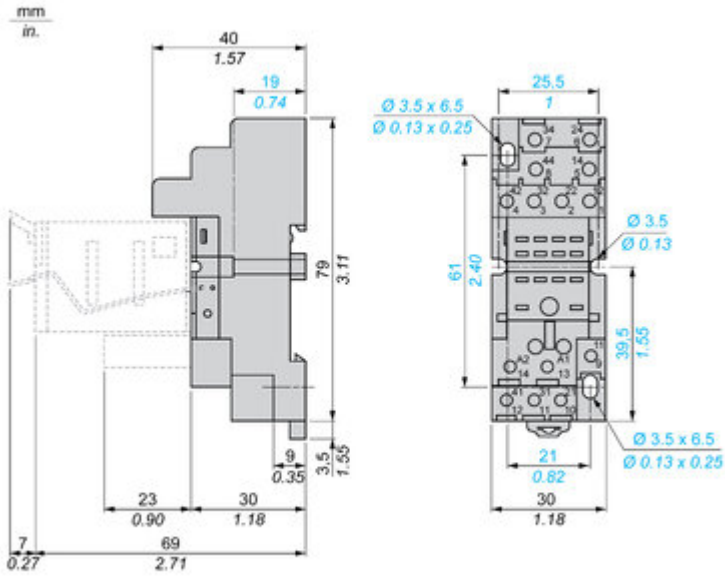

Offer Marketing Illustration

Product benefits / Features



Features

Harmony Timer Relay

-  "Diagnostic button" to check downstream circuit immediately, shorten the commission and troubleshooting time
-  Compatible with a wide range of applications including machines, buildings, water segments, and HVAC.
-  Wide range of time delay for adjustment: from 0.01 s to 999 hrs.
-  Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.
-  Unprecedented accuracy, predictive maintenance, and superior security.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Timer Relay

Flexible choice of screw or spring connection terminals for wiring.

One product reference covering 28 timing functions, 2 outputs, and a wide range of supply voltage 24...240 V AC/DC.

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.



A Dial-Pointer LED indicator that enhances ease of operation in difficult environments such as dusty or low-light conditions

Different mounting style to meet your preference:
DIN rail mount with product width; 17.5 mm/0.69 in.
22.5 mm/0.88 in.
Plug in mounting with socket

Image of product / Alternate images

Alternative

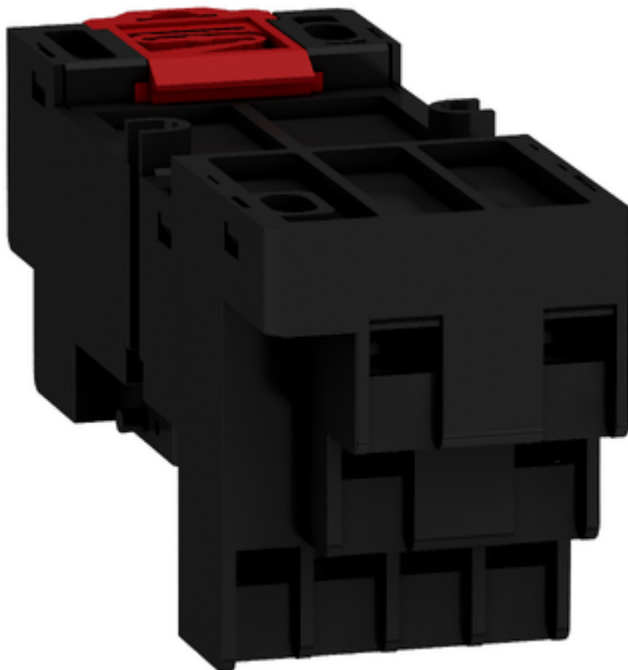






Image of product in real life situation

