

! To be discontinued

Power Relay, General Purpose Relays, 4PDT, LED clear cover, lock push button, faston terminals, 15A, 12V DC, 4NO + 4NC

784XDXM4L-12D

- ! To be discontinued on: Mar 31, 2026
- ! To be end-of-service on: Jun 30, 2026

Product availability: Stock - Normally stocked in distribution facility

### Main

Product Range	Legacy
Product Type	Power relay
Switch Function	4PDT
Contact Composition	4 NO + 4 NC

## Complementary

Input Current	15 A	
Contacts Material	Silver alloy, gold flashed	
Local Signalling	LED	
	Flag	
Control Type	Lockable test button	
Minimum Switching Current	10 mA 17 V	
Coil Resistance	76 Ohm	
Input voltage	12 V DC	
Drop-out Voltage Threshold	>= 0.15 Uc AC	
	>= 0.1 Uc DC	
Rated Operational Current	15 A at 120277 V AC conforming to UL	
	15 A at 28 V DC conforming to UL	
	15 A at 120/150 V AC conforming to CSA	
	10 A at 151/277 V AC conforming to CSA	
	15 A at 28 V DC conforming to CSA	
	15 A at 250 V AC (NO) conforming to IEC	
	15 A at 28 V DC (NO) conforming to IEC	
	7.55 A at 250 V AC (NC) conforming to IEC	
	7.55 A at 28 V DC (NC) conforming to IEC	
Power consumption in W	1.95 W DC	
Power consumption in VA	2.85 VA AC	
Voltage Range	0.81.1 Un AC/DC	
Maximum Switching Voltage	300 V AC UL	
	300 V AC CSA	
	250 V AC IEC	
Motor Power HP	0.5 hp 120 V AC 50/60 Hz	
	1 hp 277 V AC 50/60 Hz	
Connections Terminals	Faston terminals	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Mounting	Socket	
Height	1.5 in (39.1 mm)	
Width	0.8 in (21 mm)	
Depth	1.07 in (27.3 mm)	
Product Weight	2.8 oz (80 g)	
Operating Time	20 ms operating 20 ms tripping	

# **Environment**

Ambient Air Temperature for Operation	-40131 °F (-4055 °C)	
Ambient Air Temperature for Storage	-40185 °F (-4085 °C)	
<b>Product Certifications</b>	UL CE CSA	
Electrical Durability	100000 cycles resistive	
Mechanical Durability	10000000 cycles	
Dielectric Strength	2000 V AC between coil and contact 2000 V AC between poles 1500 V AC between contacts	
Shock Resistance	15 gn in operation	
Vibration Resistance	+/- 1 mm 1035 Hz) 3 gn 35150 Hz)	

# Ordering and shipping details

Category	US10CP221127	
Discount Schedule	0CP2	
GTIN	3606480281303	
Returnability	Yes	
Country of origin	CN	

# **Packing Units**

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.07 in (2.73 cm)
Package 1 Width	1.60 in (4.06 cm)
Package 1 Length	2.07 in (5.27 cm)
Package weight(Lbs)	2.8 oz (80 g)

# **Contractual warranty**

Warranty (in months)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

# ∅ Environmental footprint

Environmental Disclosure

Product Environmental Profile

#### **Use Better**


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

#### **Use Again**

○ Repack and remanufacture		
Circularity Profile	End of Life Information	
Take-back	No	

**Dimensions Drawings** 

## **Approximate Dimensions**

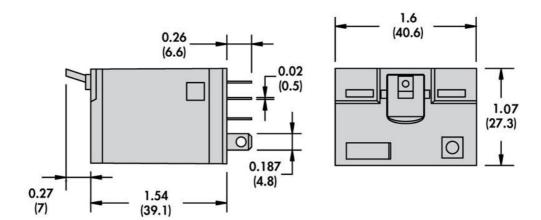

### Connections and Schema

## **Connections and Wiring Diagrams**

