


MK10 Series Reed Sensors

- **Features:** Supplied in Tubes, Excellent for Low Power Operations, With Internal Resistor
- **Applications:** On/Off Control Switch, Position Detection, Switching Element & Others
- **Markets:** Appliance, Telecommunication, Security, Medical & Others

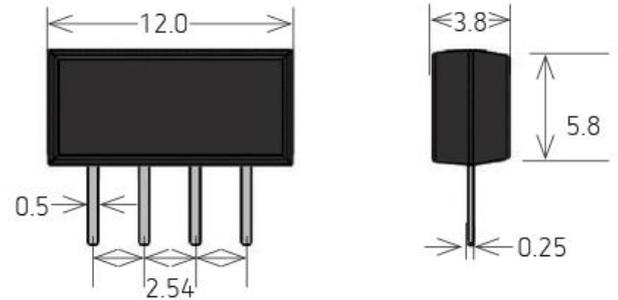

Part Description: **MK10-X-270**

Magnetic Sensitivity

B, C, D, E

Resistance Value

Diverse values available


Customer Options	Switch Model	Unit
Contact Data	87	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	1	W
Switching Voltage (max.) DC or peak AC	24	VDC/VAC
Switching Current (max.) DC or peak AC	0.1	A
Carry Current (max.) DC or peak AC	0.3	A
Contact Resistance (max.) @ 0.5V & 50mA	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.210	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	0.6	ms
Release Time (max.) Measured with no Coil Excitation	0.05	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	1	GOhm
Capacitance (typ.) @ 10kHz across open Switch	0.2	pF

MK10 Series Reed Sensors

Housing and Lead Specifications	
Housing Material	Mineral Filled Epoxy
Case Color	Black
Lead design 2	Flat, bent SMD leads

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 130	°C
Storage Temperature	-50 to 130	°C
Soldering Temperature (max.) 5 sec. max.	260	°C


Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

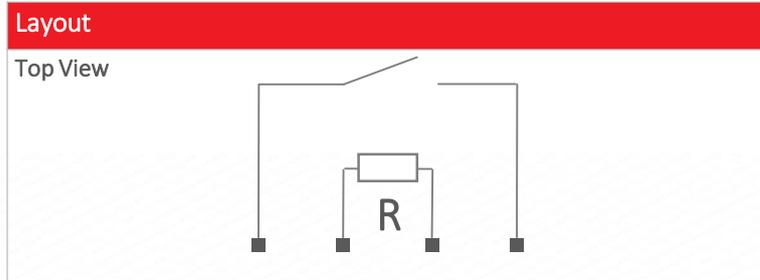

Glossary Magnetic Sensitivity							
Sens. (Form A, B)	A	B	C	D	E	F	G
Sens. (Form C)			H	I	K		
AT	05-10	10-15	15-20	20-25	25-30	30-35	35-40



MK10 Reed Sensor

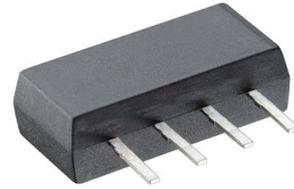


Handling & Assembly Instructions

- Use proper lead clamping or heat sinking techniques to prevent mechanical and/or heat stress during, soldering, and welding
- Mechanical shock as the result of dropping the reed sensor typically from a distance of greater than 12" may change its magnetic sensitivity and/or destroy the sensor
- Reflow Soldering Conditions according to JEDEC norm J-STD-020D.1

Life Test Data

*Load increase reduces life expectancy of Reed Switches

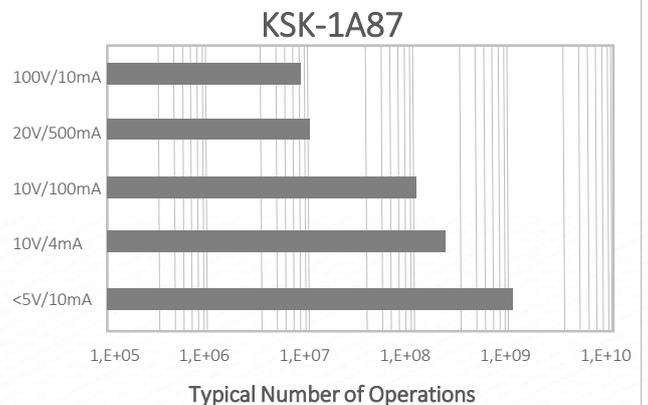

Field of application

- The MK10 is most suitable for Level sensing applications, especially with the floats MS19-NBR, MS07-PA and BV00016.



Please note: All technical specifications on this series datasheet refer to the standard product range. Modifications in the sense of technical progress are reserved. For general information only. For more specific information, please consult the product datasheet, available upon request.

This series datasheet could contain technical inaccuracies or typographical errors. Changes are periodically made to the information herein. These change will be incorporated in future revisions.

For deviating values, most current specifications and products please contact your nearest sales office.