
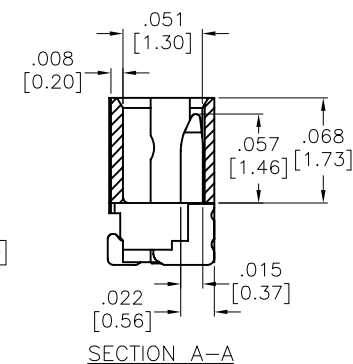

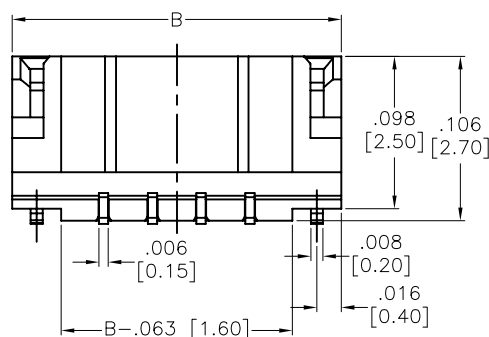
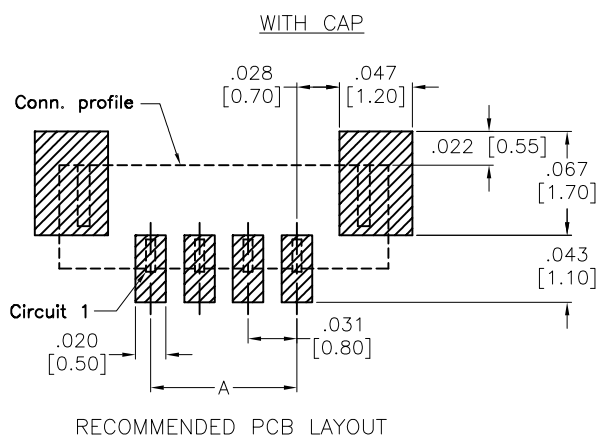
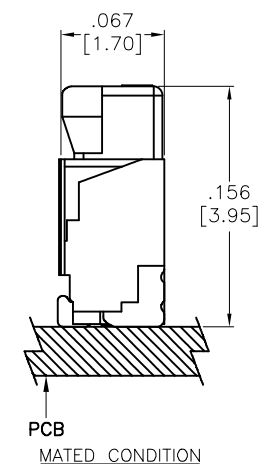
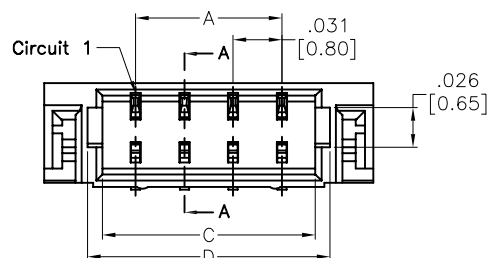


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/17	

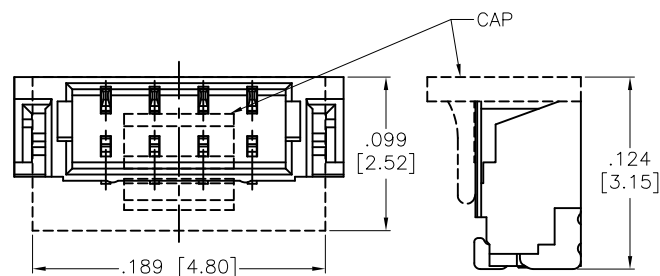

SPECIFICATIONS:

Material:

Insulator: Hi-Temp LCP, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Solder Tab: Phosphor Bronze

Plating:

Matte Tin over Copper underplate overall

Electrical:

Voltage rating: 30V AC/DC

Current rating: 0.5A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 100MΩ min

Dielectric withstanding voltage: 200V AC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 02 thru 17, 20

A = .031 [0.80] x No. of Spaces

B = .031 [0.80] x No. of Spaces + .118 [3.00]

C = .031 [0.80] x No. of Spaces + .043 [1.10]

D = .031 [0.80] x No. of Spaces + .062 [1.58]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN	AY	11/15/17
CHECKED	MY	11/15/17
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**.031 [0.80] PITCH HEADER, STRAIGHT TYPE
 WITH CAP**

SIZE X	PART NO. 08SH-B-XX-TS-SMT-PP-T/R	REV. -
REF: S00186T	SCALE: NTS	SHEET 1 OF 1