


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/17	


APPROVED: _____


DATE: _____ TITLE: _____




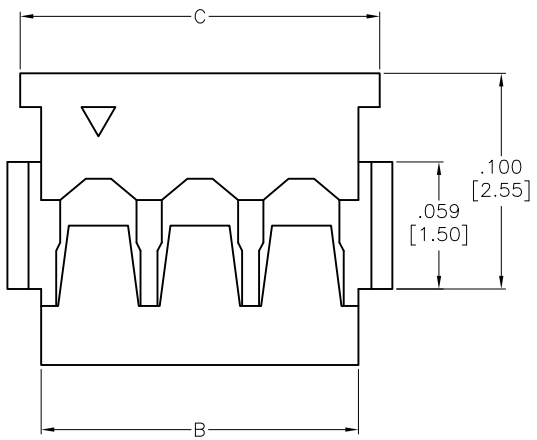


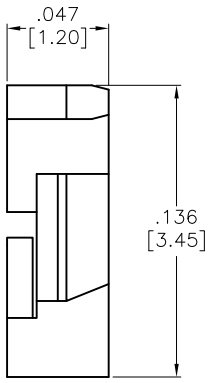

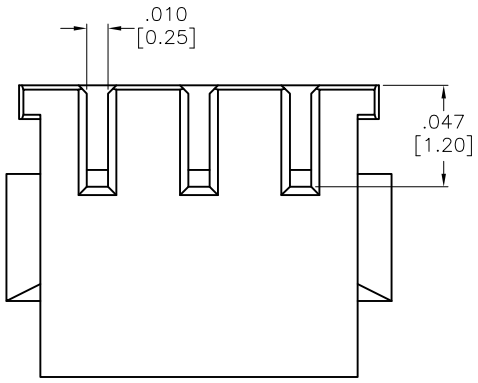

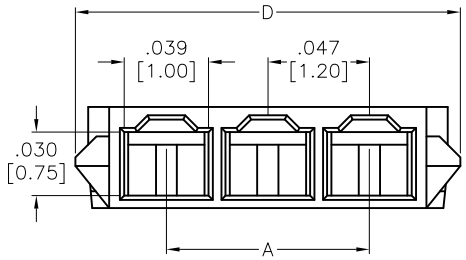

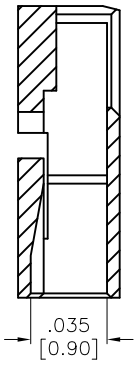

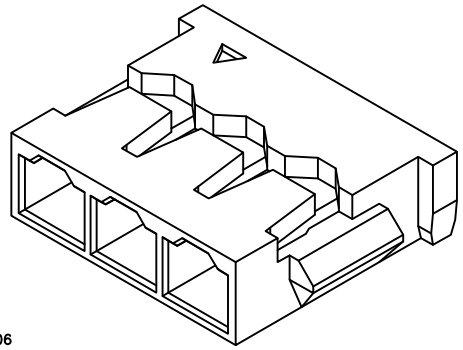

Positions: 02 thru 06
A = .047 [1.20] x No. of Spaces
B = .047 [1.20] x No. of Spaces + .053 [1.35]
C = .047 [1.20] x No. of Spaces + .073 [1.85]
D = .047 [1.20] x No. of Spaces + .085 [2.15]

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Black
Electrical:
Voltage Rating: 50V AC,DC
Current Rating: 2A AC,DC
Contact resistance: 10 mΩ max
Insulation resistance: 100MΩ min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/15/17
CHECKED	MY	11/15/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
1.2MM PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	12CH-A2-XX-BK	-

REF: S00015T | SCALE: NTS | SHEET 1 OF 1