

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/2/19	


APPROVED: _____

DATE: _____ TITLE: _____

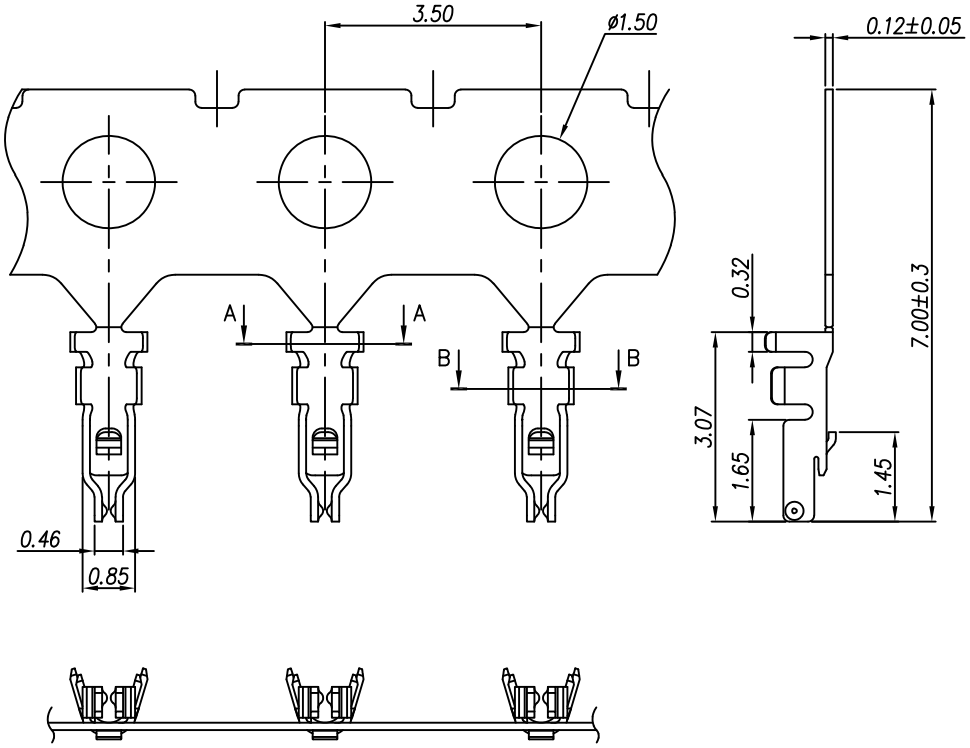



SECTION A–A



SECTION B–B

SPECIFICATIONS:
Material:
Contacts: Copper Alloy, T=0.12MM, Gold flash over Nickel plated
Electrical:
Current rating: 2.0A AC/DC, AWG #28~#30
Voltage rating: 50V AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
.X	± 0.35	X.°	±2°
.XX	± 0.25	.X°	±1°
.XXX	± 0.15	.XX°	±0.5°

APPROVALS		DATE
DRAWN	OW	12/2/19
CHECKED	AC	12/2/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
CRIMP TERMINAL 1.2mm FOR
12SH-A4-XX-GS-SMT-BK-T/R HOUSING, GOLD PLATED

SIZE	PART NO.	REV.
X	12CTA4-G-R	-

REF:	SCALE:	SHEET
S00119T	NTS	1 OF 1