


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/20	
A		UPDATE DRAWING	10/17/22	LH/TY
B		UPDATE DRAWING	11/3/22	LH/TY


APPROVED: _____

DATE: _____ TITLE: _____

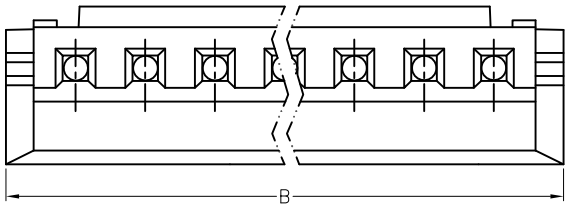

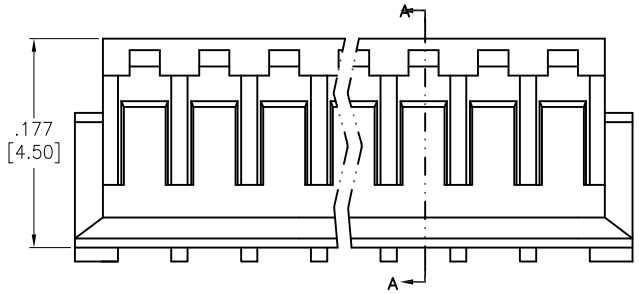



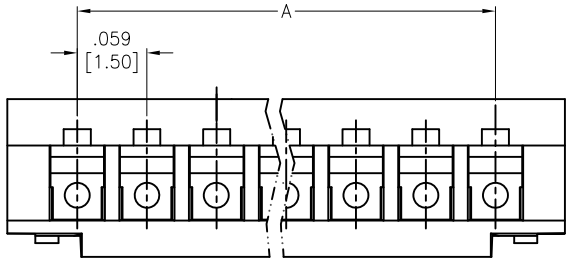

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating: 100V AC/DC
Current rating: 1A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 02 thru 13
A= .059 [1.50] x No. of Space
B= .059 [1.50] x No. of Space + .118 [3.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	OW	4/28/20
CHECKED	RL	4/28/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.059 [1.50] PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	15CH-A1-XX	B

REF: S00111C | SCALE: NTS | SHEET 1 OF 1