


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/23	


APPROVED: _____


DATE: _____ TITLE: _____

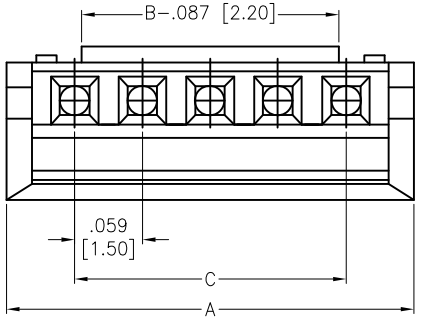

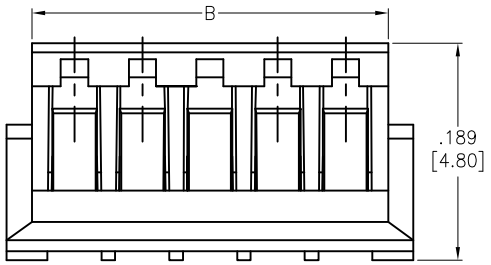



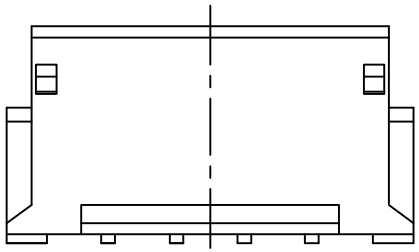

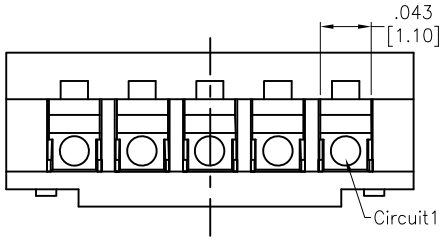

Positions: 02 thru 16
A= .059 [1.50] x No. of Space + .118 [3.00]
B= .059 [1.50] x No. of Space + .075 [1.90]
C= .059 [1.50] x No. of Space

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V–0
Insulator color: Natural
Electrical:
Voltage rating: 50 AC/DC
Current rating: 1A AC/DC (AWG #26)
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
–25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	3/17/23
CHECKED	KL	3/17/23
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.059 [1.50] PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	15CH-A10B-XX	-

REF:	SCALE:	SHEET
S00181C	NTS	1 OF 1