

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/14	

APPROVED: _____

DATE: _____ TITLE: _____

POLES	DIMENSIONS INCHES [mm]	
	A	B
2	.039 [1.00]	.157 [4.00]
3	.079 [2.00]	.197 [5.00]
4	.118 [3.00]	.236 [6.00]
5	.157 [4.00]	.276 [7.00]
6	.197 [5.00]	.315 [8.00]
7	.236 [6.00]	.354 [9.00]
8	.276 [7.00]	.394 [10.00]
9	.315 [8.00]	.433 [11.00]
10	.354 [9.00]	.472 [12.00]
11	.394 [10.00]	.512 [13.00]
12	.433 [11.00]	.551 [14.00]
13	.472 [12.00]	.591 [15.00]
14	.512 [13.00]	.630 [16.00]
15	.551 [14.00]	.669 [17.00]
20	.748 [19.00]	.866 [22.00]

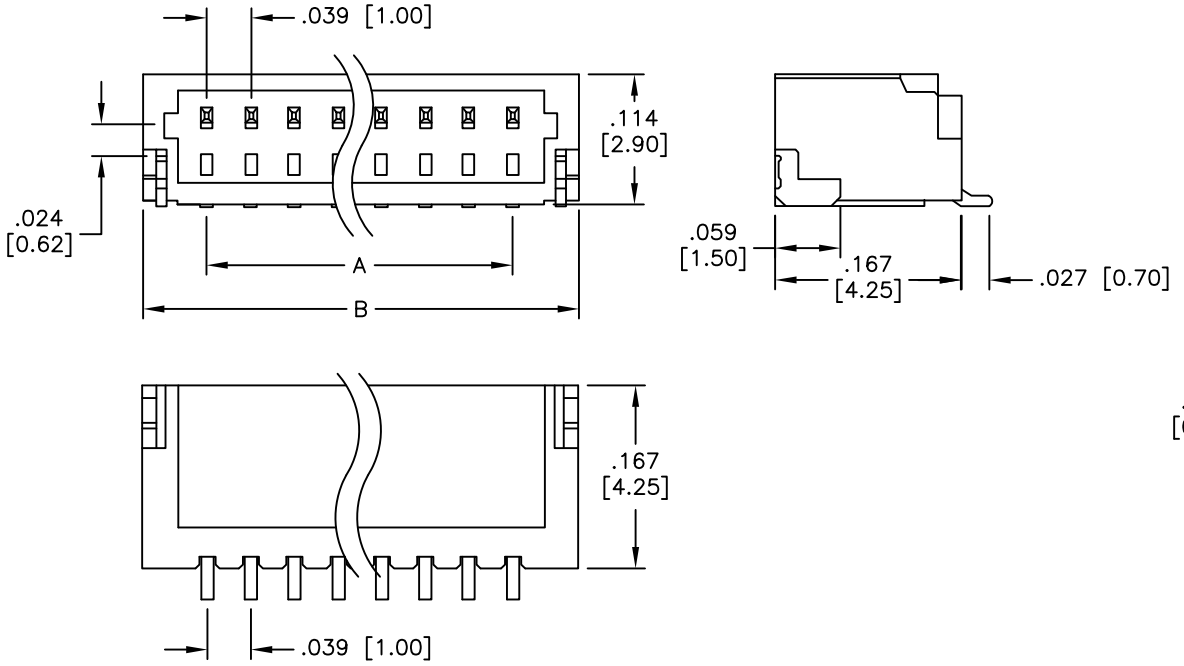

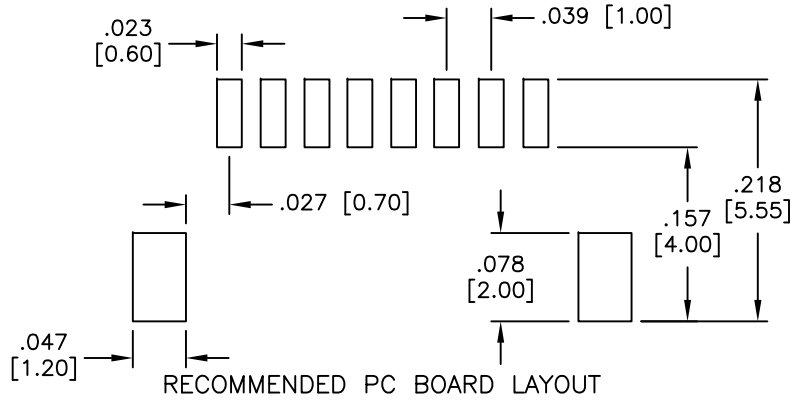

RECOMMENDED PC BOARD LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi–Temp. Thermoplastic, rated UL 94V–0
Insulator color: Natural
Plating:
Matte Tin over Copper underplate overall
Electrical:
Operating voltage: 50 VAC max
Current rating: 1 Amp max
Contact resistance: 20 mohms max.
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/7/14
CHECKED	RT	11/7/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 1.0mm WIRE TO BOARD WAFER SMT SIDE ENTRY

SIZE	PART NO.	REV.
X	1SH-A-XX-MTR-SMT-T/R	-

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1