
Rev	AWO #	Description	Date	Appr
-		RELEASED	12/15/22	

APPROVED: _____

DATE: _____ TITLE: _____

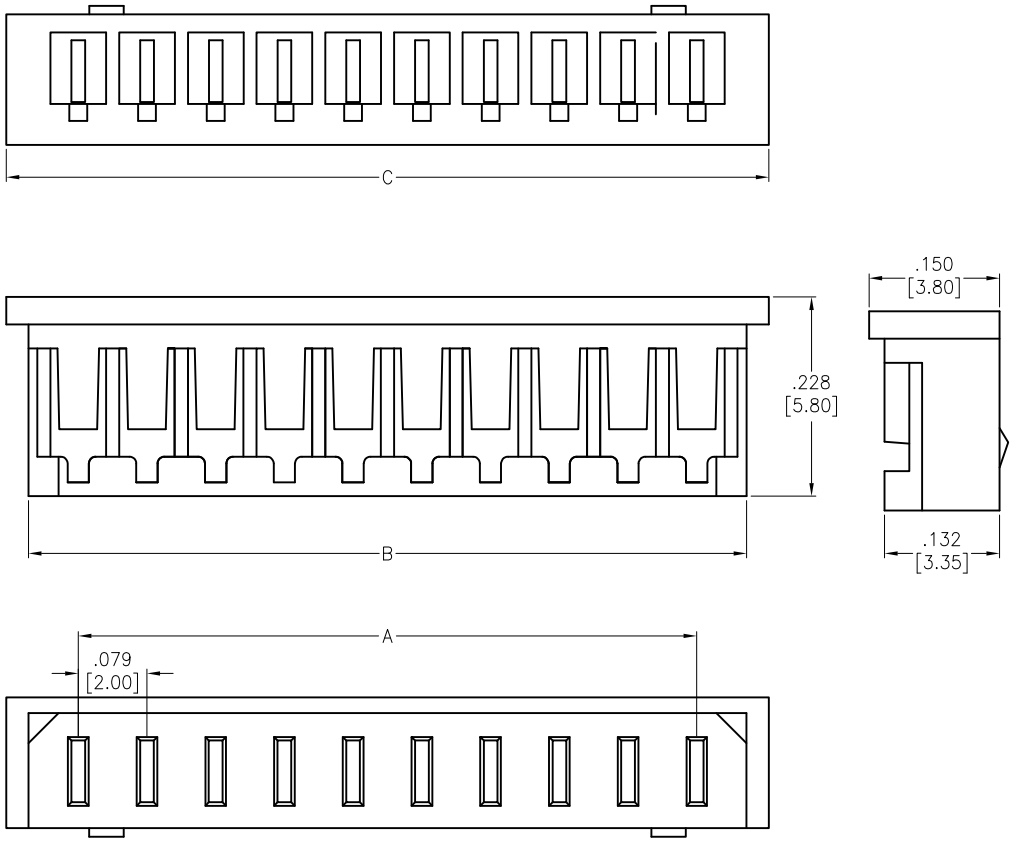

Positions: 2 thru 15
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .114 [2.90]
C = .079 [2.00] x No. of Spaces + .161 [4.10]

SPECIFICATIONS:
Material:
Insulator: NY66, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating: 125 V
Current rating: 2 A
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	12/15/22
CHECKED	AC	12/15/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] CRIMP HOUSING

SIZE	PART NO.	REV.
X	2CH-F4-XX	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1