
Rev	AWO #	Description	Date	Appr
-		RELEASED	2/24/16	

APPROVED: _____

DATE: _____ TITLE: _____

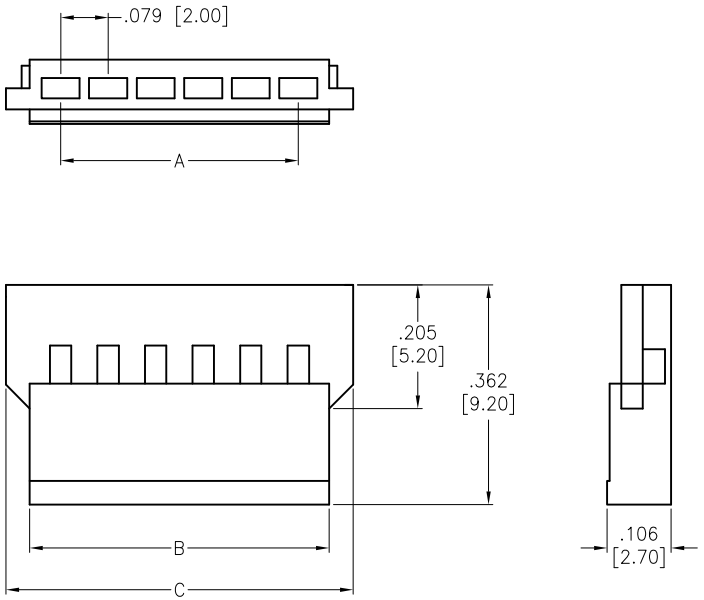

Positions: 2 thru 10
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .098 [2.50]
C = .079 [2.00] x No. of Spaces + .177 [4.50]

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Black
Electrical:
Operating voltage: 125 VAC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	2/24/16
CHECKED	TW	2/24/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] PITCH WIRE TO WIRE CRIMP HOUSING

SIZE	PART NO.	REV.
X	2CH-Y-XX	-

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1