
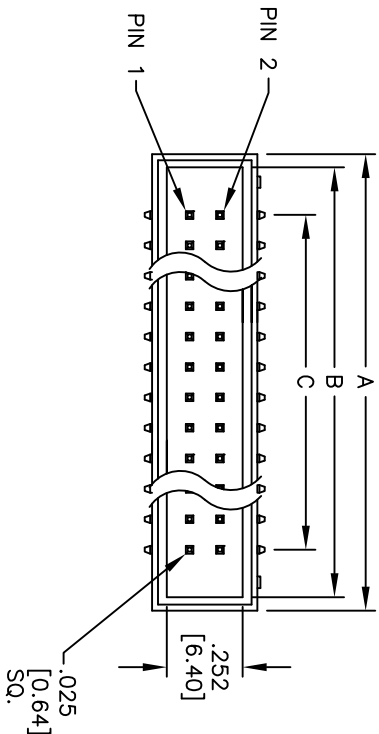
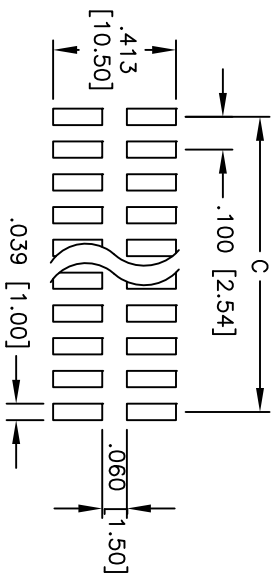
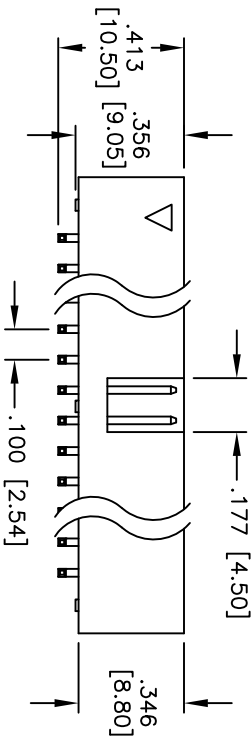


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		Preliminary	1/16/01	ELD
A		REDRAWN	1/16/12	

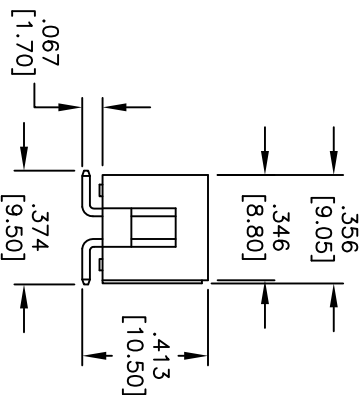

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS Compliant



Positions: 06, 08, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 56, 60, 64
A = .100 [2.54] X No. of Positions /2 + .299 [7.60]
B = .100 [2.54] X No. of Positions /2 + .212 [5.40]
C = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		Holes	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	WGM	1/16/01	
CHECKED			
APPROVED			
TITLE		BOX HEADER, VERTICAL, SMT, GOLD PLATED	
909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		REV. A	
SIZE		PART NO.	
X		BHR-XX-VJA-SMT	
REF: S00039T		SCALE: NTS	
SHEET 1 OF 1			