

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/14	


APPROVED: _____

DATE: _____ TITLE: _____

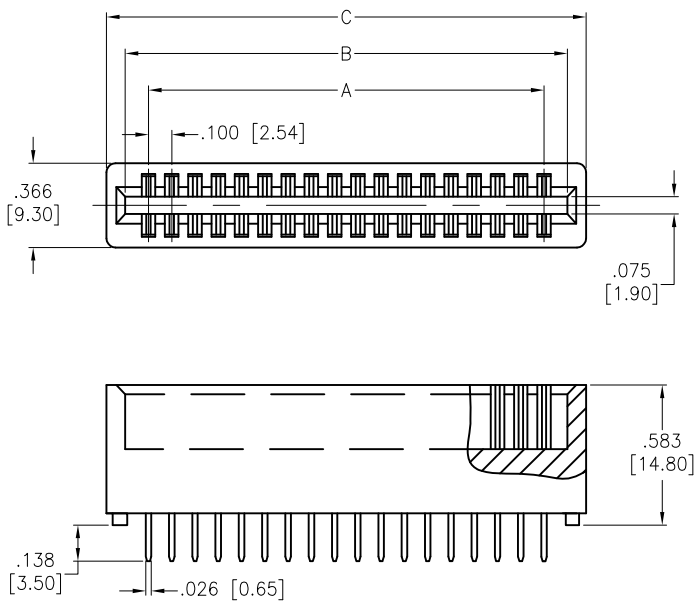

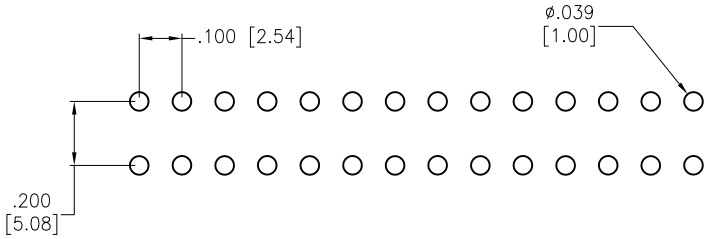

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Nickel underplate on PCB tails
Electrical:
Current rating: 3 Amps
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS complaint

RoHS COMPLIANT

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
A = .100 [2.54] x No. of Spaces
B = A + .220 [5.58]
C = A + .360 [9.14]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	3/19/14
CHECKED	SY	3/19/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
CARD EDGE CONNECTOR, VERTICAL, PCB

SIZE	PART NO.	REV.
X	CE-XX-U-A	-

REF:	SCALE:	SHEET
S00245T	NTS	1 OF 1