


6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/19/22	

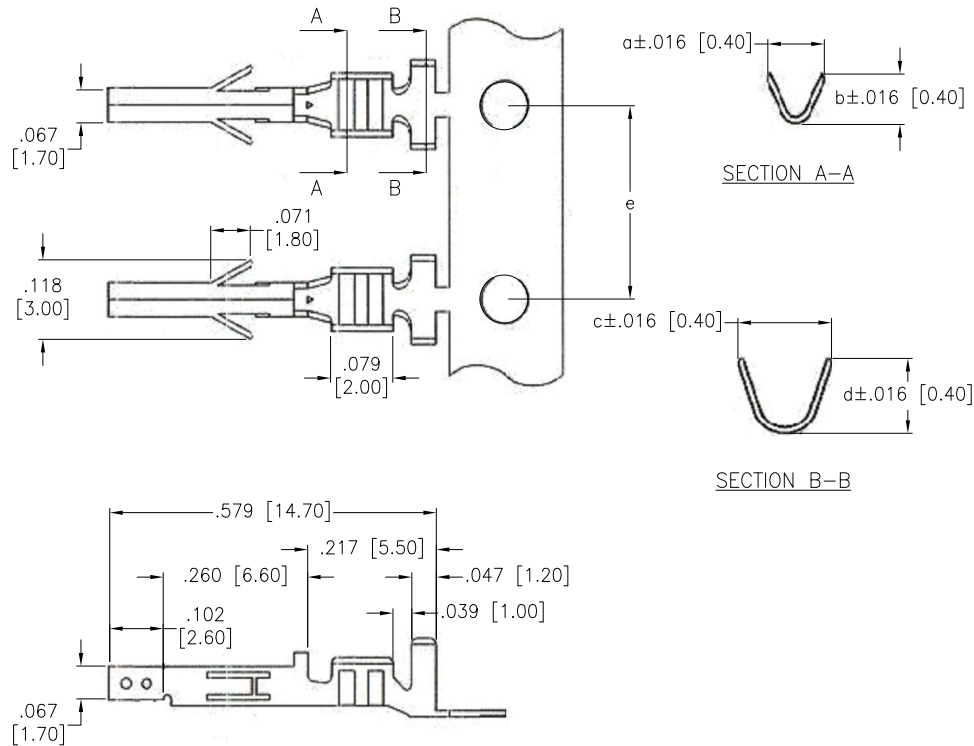

SPECIFICATIONS:

Material:

Contact: Copper Alloy, .008 [0.20] Thickness

Plating: Gold over Nickel underplate overall

Electrical:

Voltage rating: 600 VAC/DC

Current rating: 9 A max (#18 AWG)

Contact resistance: 10 mohms max.

Crimp resistance: 5 mohms max.

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



P/N	Wire size	Dim. a	Dim. b	Dim. c	Dim. d	Dim. e
DMH-A2-C-F-G-R	#22~#28 AWG	.065 [1.65]	.071 [1.80]	.091 [2.60]	.091 [2.30]	.374 [9.50]
DMH-B2-C-F-G-R	#18~#24 AWG	.075 [1.90]	.091 [2.30]	.150 [3.80]	.177 [4.50]	.433 [11.00]
DMH-C2-C-F-G-R	#16 AWG	.091 [2.30]	.114 [2.90]	.150 [3.80]	.177 [4.50]	.433 [11.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	LH	4/19/22
CHECKED	KC	4/19/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		CRIMP CONTACT, DMH SERIES FEMALE, GOLD PLATED, ON REELS		
SIZE	PART NO.	DMH-X2-C-F-G-R		REV.
X				-
REF:	S00123T	SCALE:	NTS	SHEET 1 OF 1